

SPDT SWITCH GaAs MMIC

■GENERAL DESCRIPTION

NJG1523KB2 is a SPDT switch IC featured low insertion loss, medium handling power and high isolation.

This device is suitable for switching of Tx/Rx signals at sub-microwave applications.

This switch exhibits wide frequency range from 50MHz to 3.0GHz at low operating voltage of 2.5V, and is operated up to 25dBm at 3.0V operating voltage.

The ultra small & ultra thin FLP6 package is applied.

■PACKAGE OUTLINE




NJG1523KB2

■FEATURES

- Single low voltage control +2.5~+6.5V
- Low insertion loss
 - 0.4dB typ. @f=1GHz, P_{in}=23dBm
 - 0.5dB typ. @f=2GHz, P_{in}=23dBm
- High isolation 29dB typ. @f=2GHz, P_{in}=23dBm
- Handling power 25dBm max. @f=2GHz, V_{CTL}=3.0V
- Low current consumption 8uA typ. @f=0.05~2.5GHz, P_{in}=23dBm
- Ultra small & ultra thin package FLP6-B2 (Mount Size: 2.1x2.0x0.75mm)

■PIN CONFIGURATION

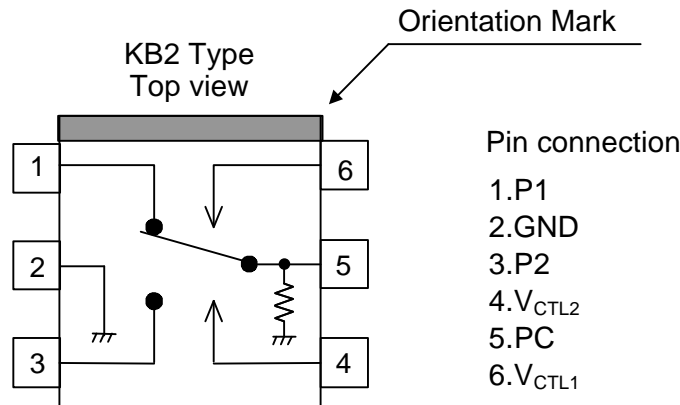

■TRUTH TABLE

“H”=V_{CTL}(H), “L”=V_{CTL}(L)

| V _{CTL1} | H | L | L | H |
|-------------------|-----|-----|---|---|
| V _{CTL2} | L | H | L | H |
| PC – P1 | ON | OFF | Insertion loss=17dB P1 return Loss=2dB | Insertion loss=18dB P1 return Loss=2dB |
| PC – P2 | OFF | ON | Insertion loss=17dB P2 return Loss=2dB | Insertion loss=18dB P2 return Loss=2dB |

Note: The values of insertion losses and return losses are the typical values at 2GHz.

NJG1523KB2

■ABSOLUTE MAXIMUM RATINGS

| (T _a =25°C) | | | | |
|------------------------|------------------|--|----------|-------|
| PARAMETER | SYMBOL | CONDITIONS | RATINGS | UNITS |
| Input Power | P _{in} | V _{CTL(L)} =0V, V _{CTL(H)} =2.7V | 32 | dBm |
| Control Voltage | V _{CTL} | V _{CTL(H)} -V _{CTL(L)} | 7.5 | V |
| Power Dissipation | P _D | | 450 | mW |
| Operating Temp. | T _{opr} | | -30~+85 | °C |
| Storage Temp. | T _{stg} | | -55~+125 | °C |

■ELECTRICAL CHARACTERISTICS

| (V _{CTL(L)} =0V, V _{CTL(H)} =2.7V, Z _S =Z _I =50Ω, C ₆ =10pF, T _a =25°C) | | | | | | |
|---|---------------------|-----------------------------------|------|------|------|-------|
| PARAMETERS | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
| Operating voltage (LOW) | V _{CTL(L)} | | -0.2 | 0 | 0.2 | V |
| Operating voltage (HIGH) | V _{CTL(H)} | | 2.5 | 2.7 | 6.5 | V |
| Control current | I _{CTL} | f=2.0GHz, P _{in} =23dBm | - | 8 | 14 | uA |
| Insertion loss 1 | LOSS1 | f=1GHz, P _{in} =23dBm | - | 0.4 | 0.7 | dB |
| Insertion loss 2 | LOSS2 | f=2GHz, P _{in} =23dBm | - | 0.5 | 0.8 | dB |
| Isolation 1 (PC-P1, PC-P2, P1-P2) | ISL1 | f=1GHz, P _{in} =23dBm | 27 | 29 | - | dB |
| Isolation 2 (PC-P1, PC-P2, P1-P2) | ISL2 | f=2GHz, P _{in} =23dBm | 26 | 29 | - | dB |
| Maximum input power 1* | Pin1 | V _{CTL(H)} =2.7V, f=2GHz | - | - | 24.0 | dBm |
| Maximum input power 2* | Pin2 | V _{CTL(H)} =3.0V, f=2GHz | - | - | 25.0 | dBm |
| Maximum input power 3* | Pin3 | V _{CTL(H)} =6.5V, f=2GHz | - | - | 34.5 | dBm |
| Pin at 1dB compression point | P _{-1dB} | f=2.0GHz | 28 | 30.5 | - | dBm |
| VSWR (PC, P1, P2) | VSWR | f=0.05~2.2GHz, ON State | - | 1.4 | 1.6 | |
| Switching time | T _{SW} | f _{in} =0.05~2.5GHz | - | 20 | - | ns |

* Maximum input power: This value is defined as maximum input power of linear operating region or damage free operating region







■ TERMINAL INFORMATION

| No. | SYMBOL | DESCRIPTION |
|-----|------------|--|
| 1 | P1 | RF port. This port is connected with PC port by controlling 6 th pin ($V_{CTL(H)}$) to 2.5~6.5V and 4 th pin ($V_{CTL(L)}$) to -0.2~+0.2V. An external capacitor is required to block the DC bias voltage of internal circuit. (50~100MHz: 0.01uF, 0.1~0.5GHz: 1000pF, 0.5~2.5GHz: 56pF) |
| 2 | GND | Ground terminal. Please connect this terminal with ground plane as close as possible for excellent RF performance. |
| 3 | P2 | RF port. This port is connected with PC port by controlling 4 th pin ($V_{CTL(H)}$) to 2.5~6.5V and 6 th pin ($V_{CTL(L)}$) to -0.2~+0.2V. An external capacitor is required to block the DC bias voltage of internal circuit. (50~100MHz: 0.01uF, 0.1~0.5GHz: 1000pF, 0.5~2.5GHz: 56pF) |
| 4 | V_{CTL2} | Control port 2. The voltage of this port controls PC to P2 state. The 'ON' and 'OFF' state is toggled by controlling voltage of this terminal such as high-state (2.5~6.5V) or low-state (-0.2~+0.2V). The voltage of 6 th pin have to be set to opposite state. The bypass capacitor has to be chosen to reduce switching time delay from 10pF~1000pF range. |
| 5 | PC | Common RF port. In order to block the DC bias voltage of internal circuit, an external capacitor is required. (50~100MHz:0.01uF, 0.1~0.5GHz: 1000pF, 0.5~2.5GHz: 56pF) |
| 6 | V_{CTL1} | Control port 1. The voltage of this port controls PC to P2 state. The 'ON' and 'OFF' state is toggled by controlling voltage of this terminal such as high-state (2.5~6.5V) or low-state (-0.2~+0.2V). The voltage of 4 th pin have to be set to opposite state. The bypass capacitor has to be chosen to reduce switching time delay from 10pF~1000pF range. |

NJG1523KB2

■ ELECTRICAL CHARACTERISTICS

(f=0.1~3.0GHz, with Application circuit, Losses of external circuit are excluded)

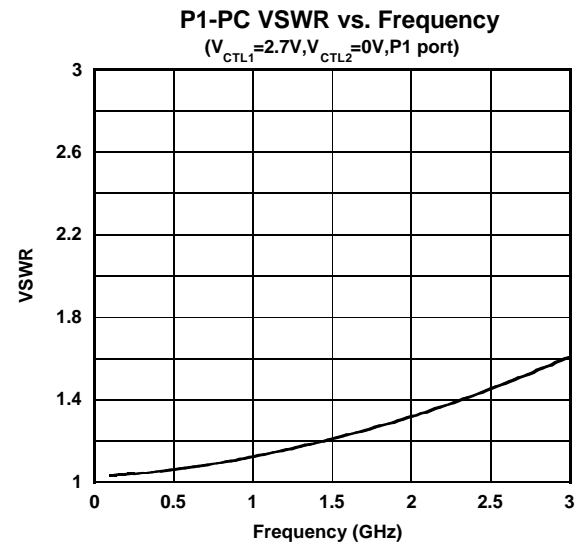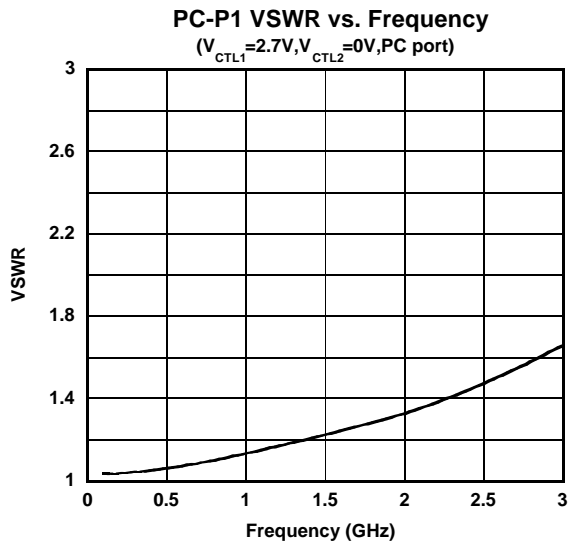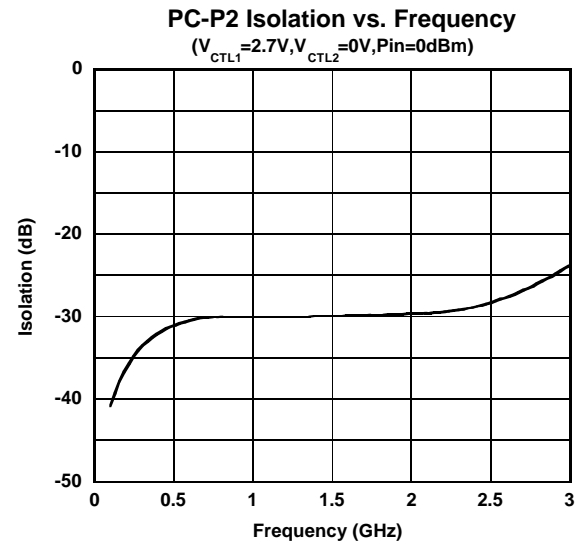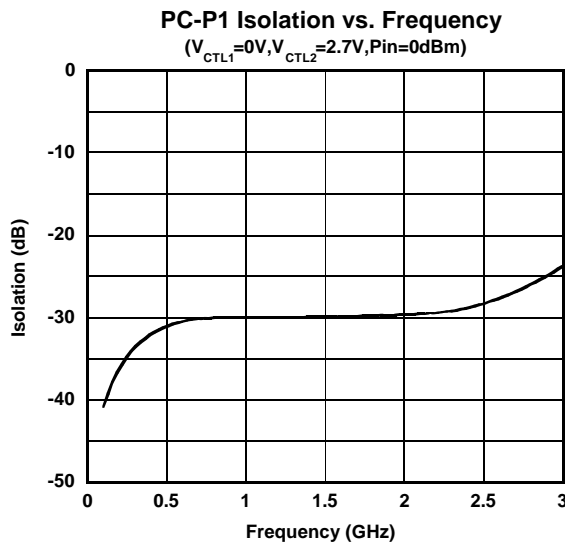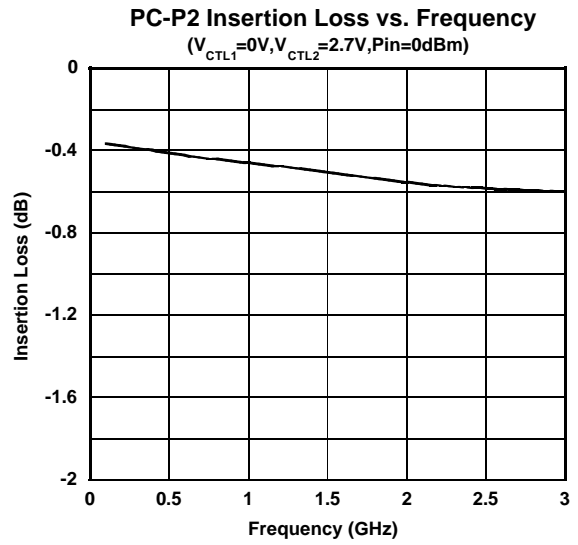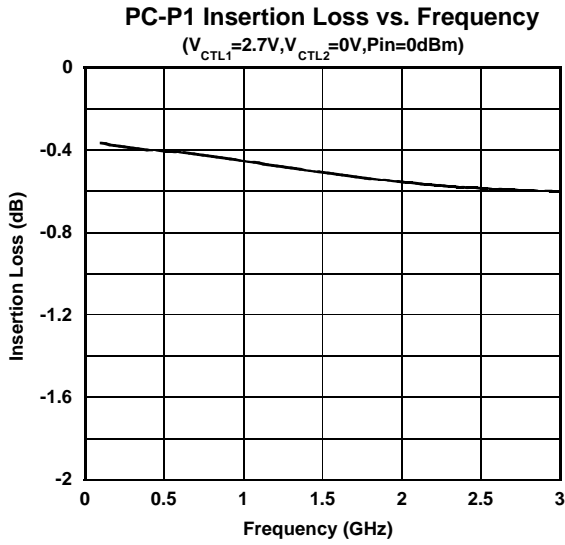


ELECTRICAL CHARACTERISTICS

(with application circuit, without DC Blocking Capacitor, Losses of external circuit are excluded)


P2-PC VSWR vs. Frequency

($V_{CTL1}=0V, V_{CTL2}=2.7V, P2$ port)

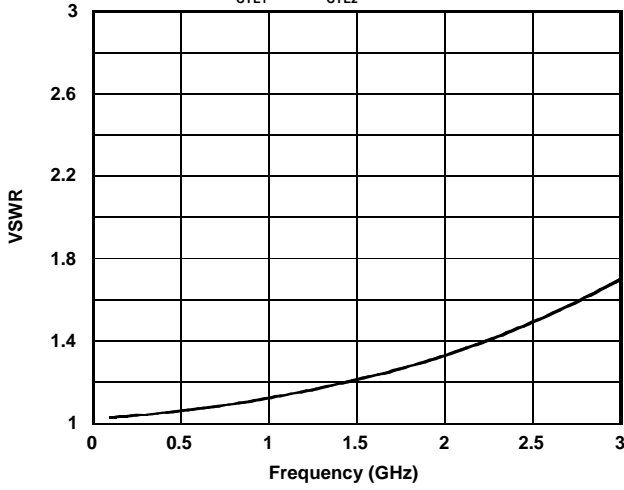


Switching Speed

($V_{CTL(L)}=0V, V_{CTL(H)}=2.7V$)

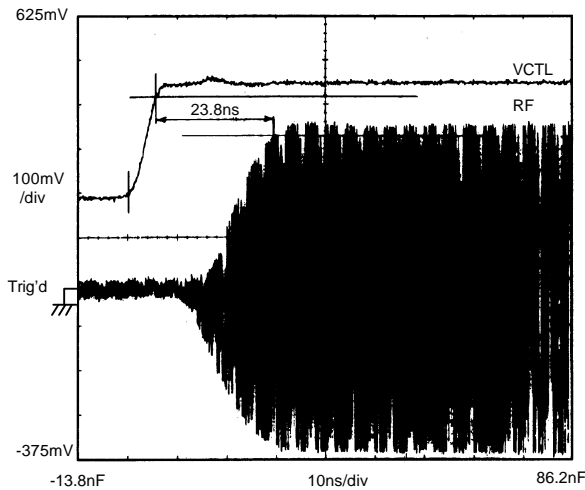


Input Power vs. Output Power, I_{CTL}

($V_{CTL(L)}=0V, V_{CTL(H)}=2.7V$)

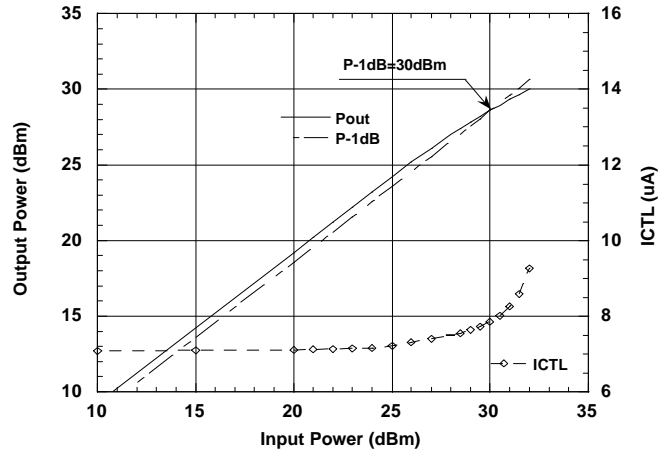


Insertion Loss vs. Ambient Temperature

(PC-P1 port, $f_{in}=1GHz, V_{CTL(L)}=0V$)

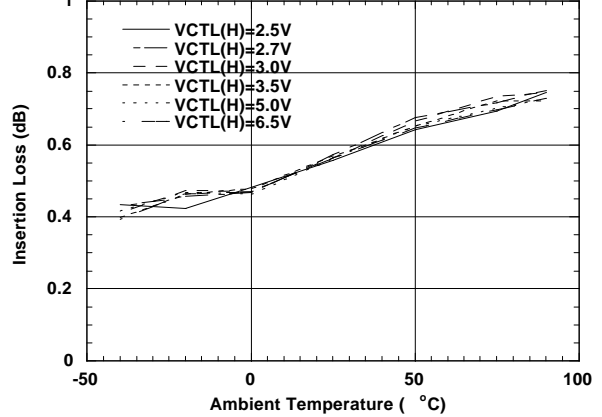


Isolation vs. Ambient Temperature

(PC-P1 port, $f_{in}=1GHz, V_{CTL(L)}=0V$)

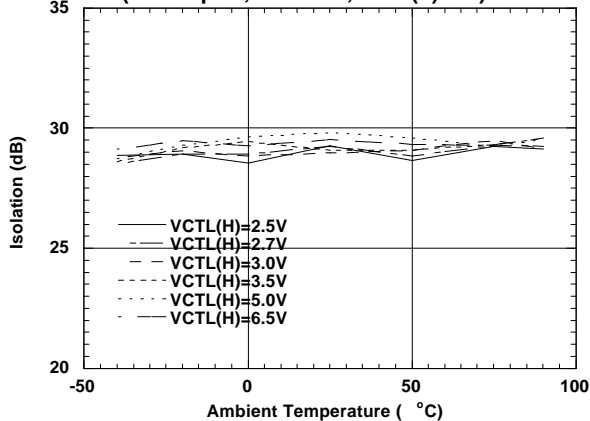

ICTL vs. Ambient Temperature







(PC-P1 port, $f_{in}=1GHz, V_{CTL(L)}=0V$)

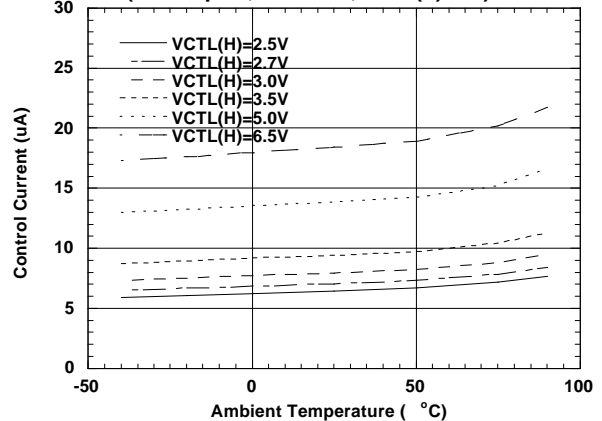

NJG1523KB2







■ ELECTRICAL CHARACTERISTICS

(f=50~100MHz, with Application circuit (Parts list 1), Losses of PCB, connector and DC blocking capacitor are included)

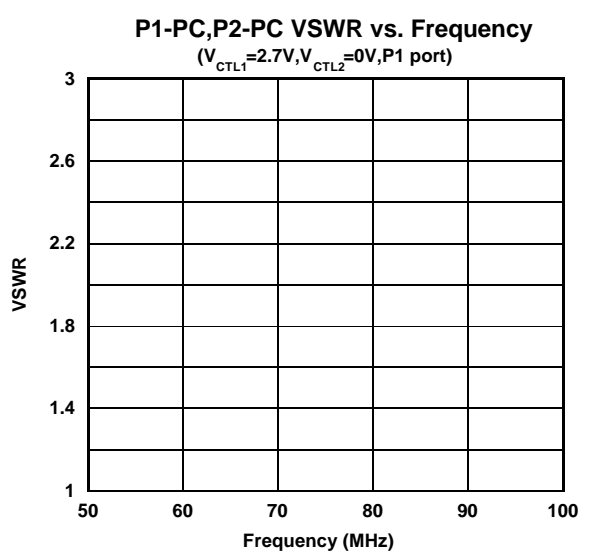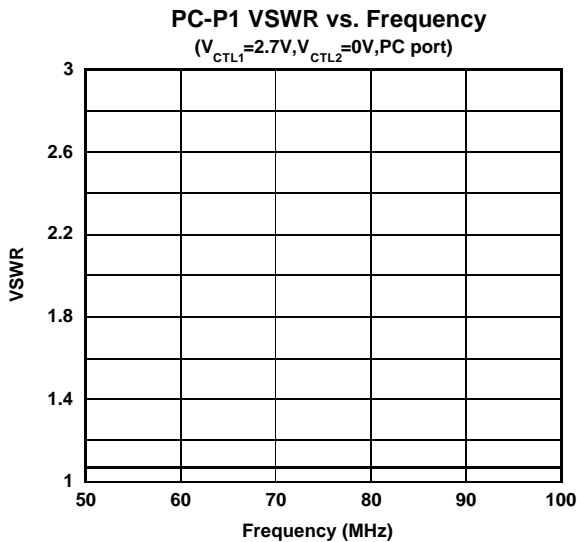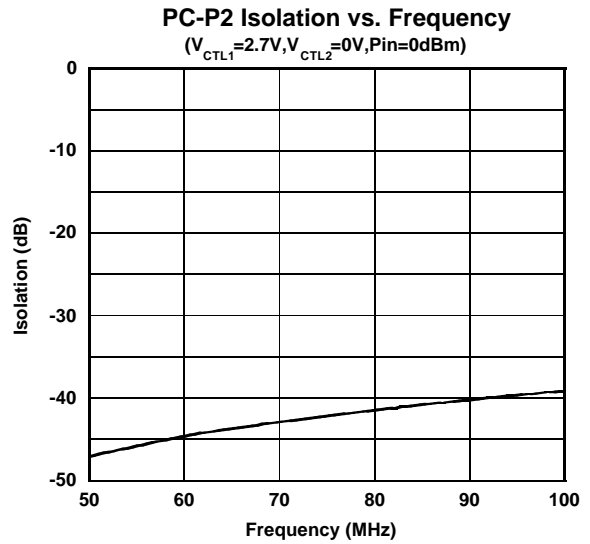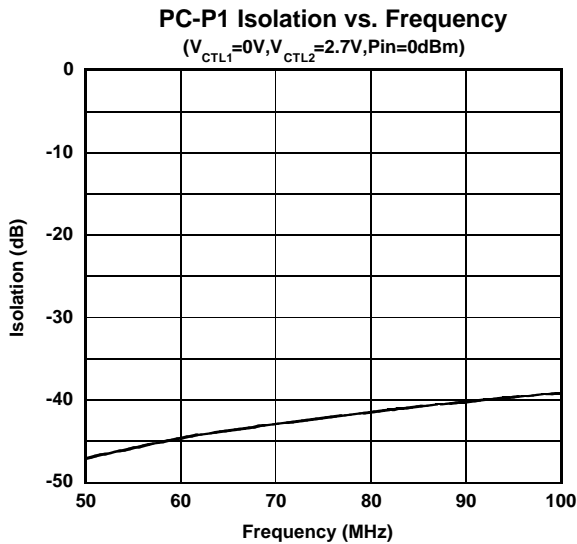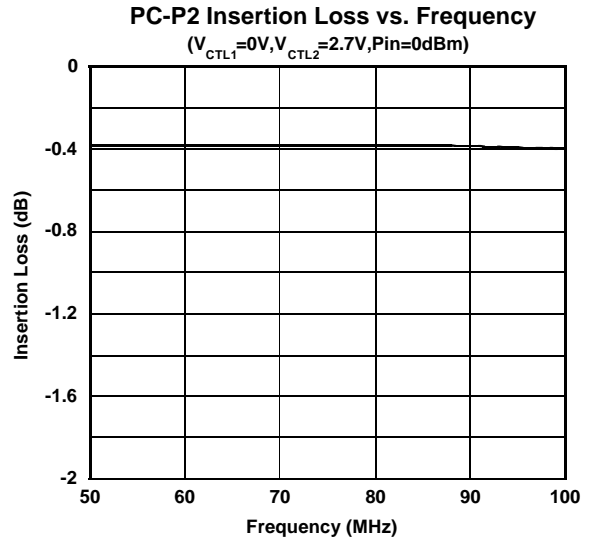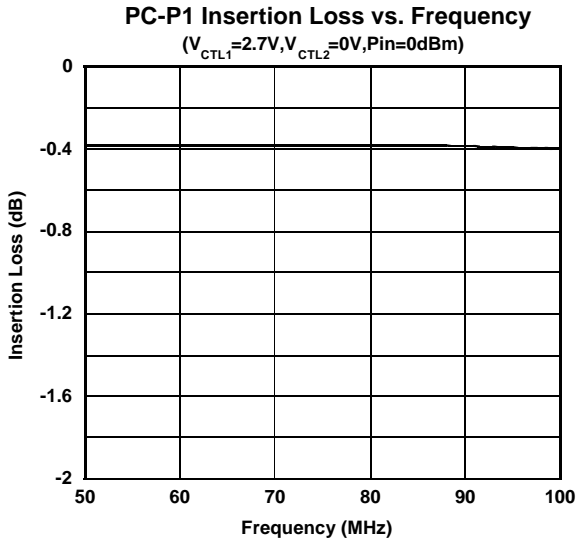

■ ELECTRICAL CHARACTERISTICS







(f=100~500MHz, with Application circuit (Parts list 2), Losses of PCB, connector and DC blocking capacitor are included)

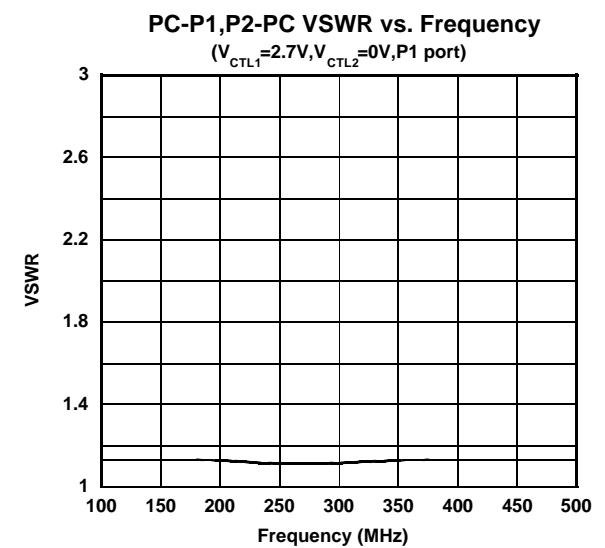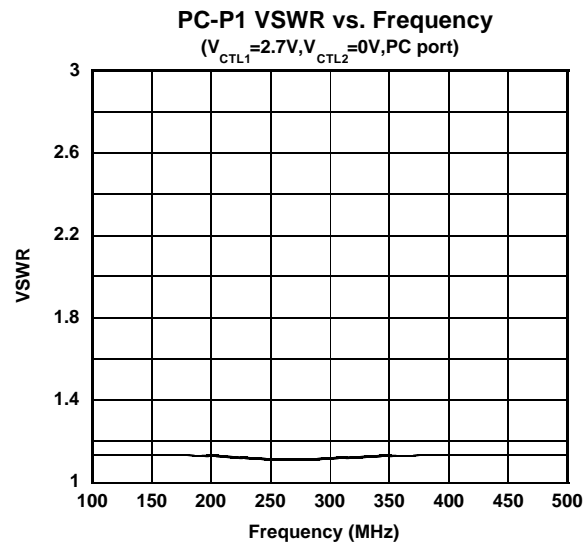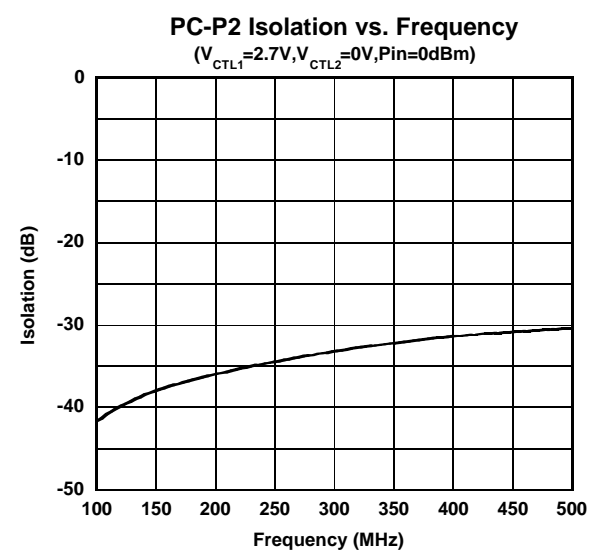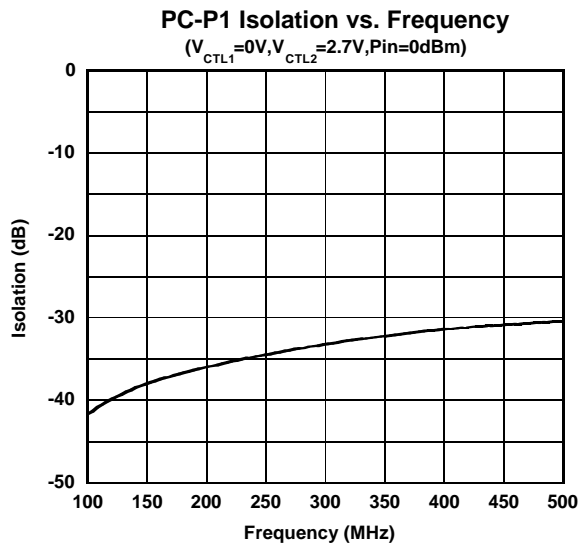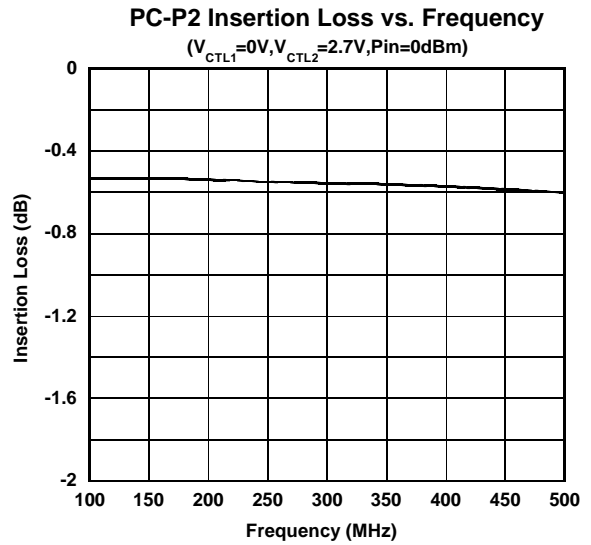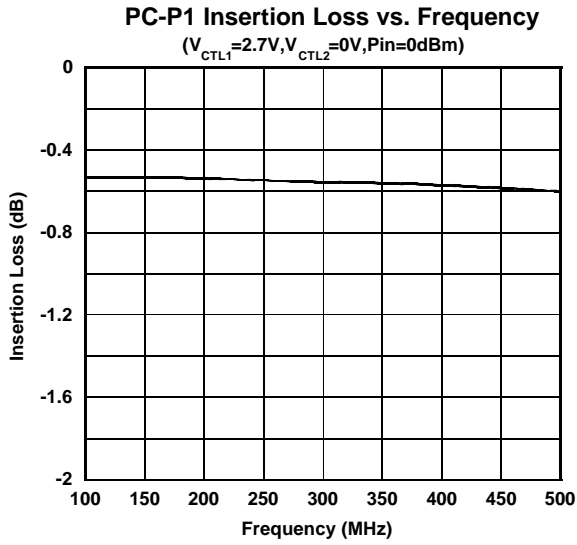

NJG1523KB2




ELECTRICAL CHARACTERISTICS

(f=0.1~3.0GHz, with Application circuit (Parts list 3), Losses of PCB, connector and DC blocking capacitor are included)

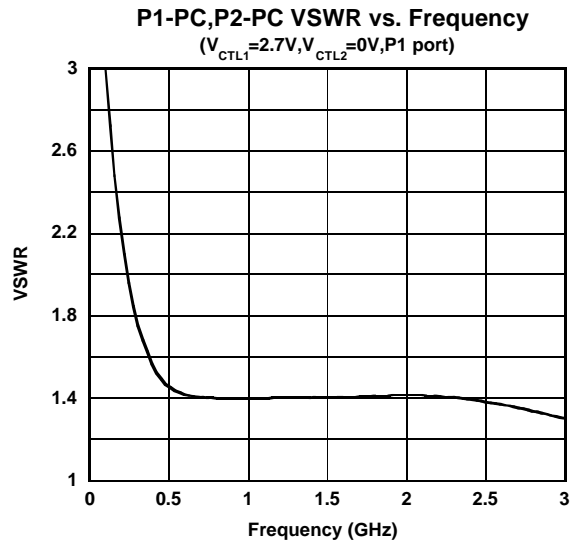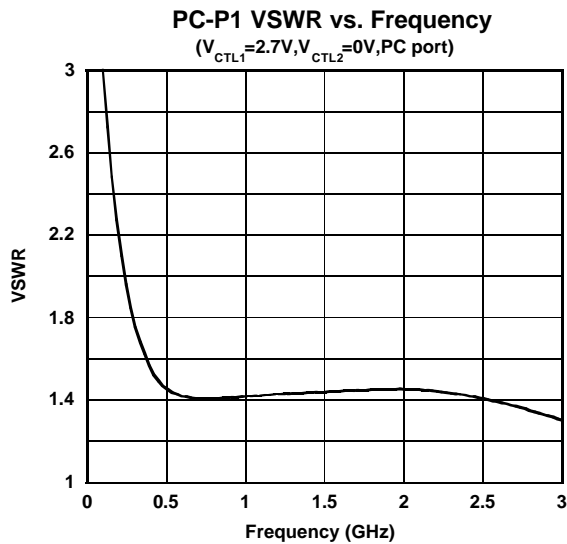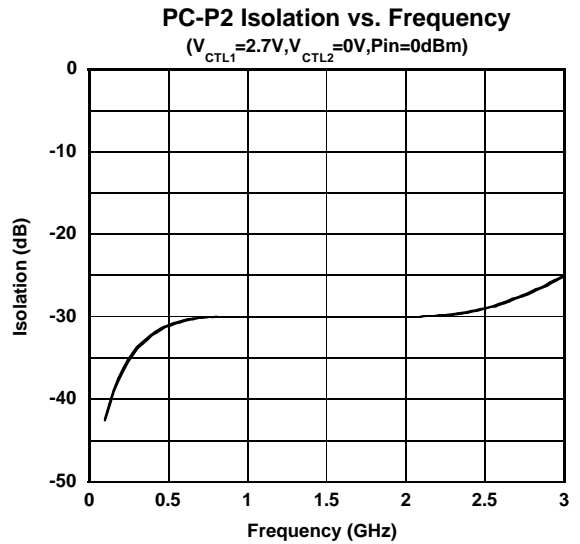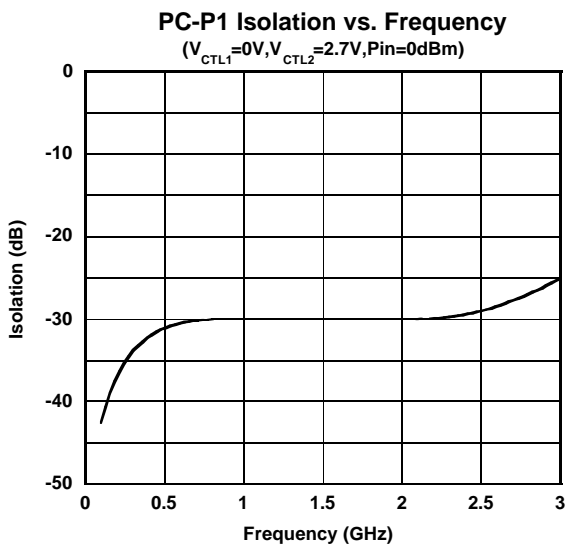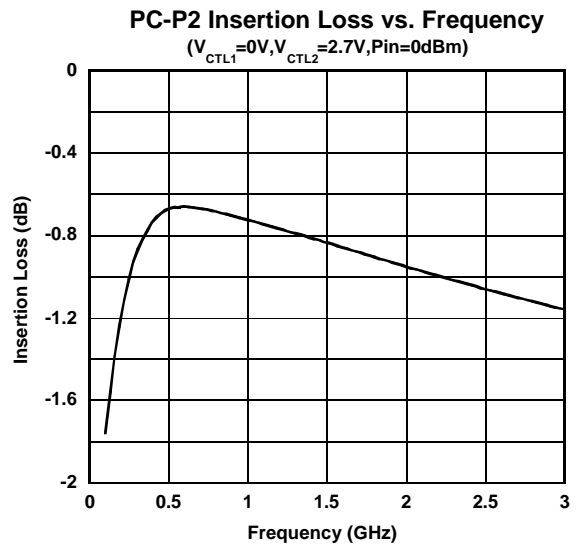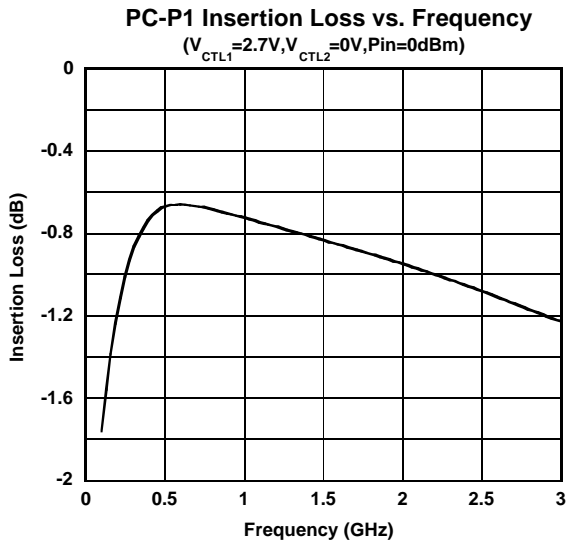


■ ELECTRICAL CHARACTERISTICS

(Losses of PCB, connector and DC blocking capacitor at each frequency.)

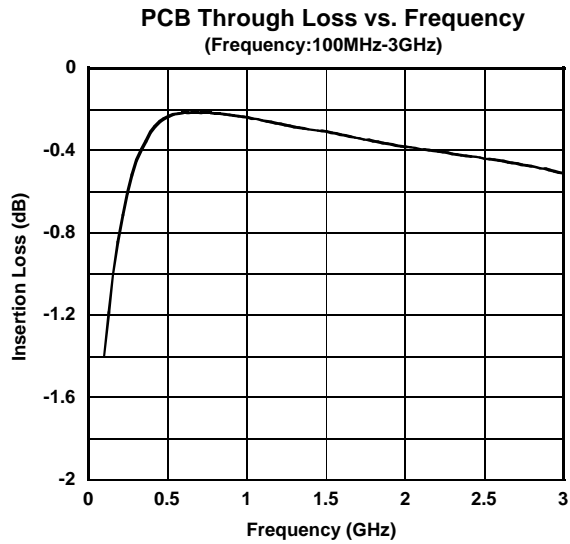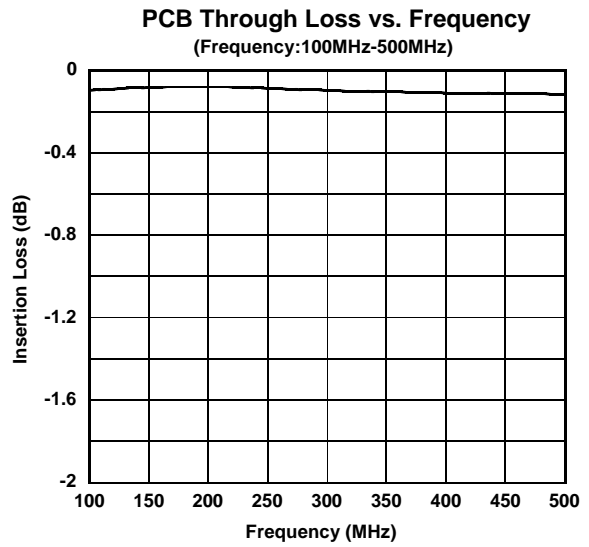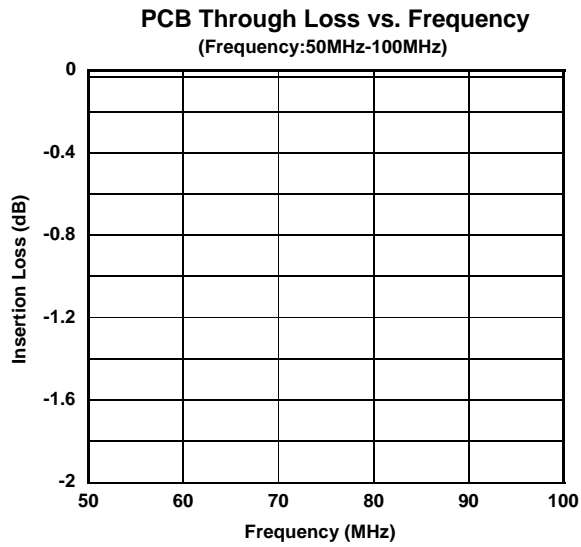

NJG1523KB2

APPLICATION CIRCUIT

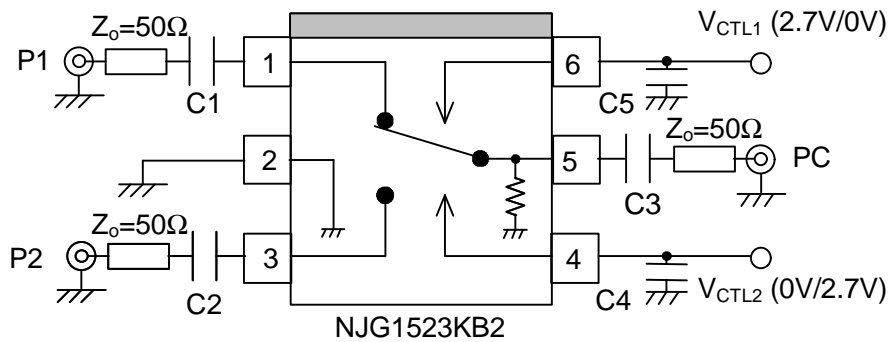


Parts List

| Parts number | List 1 | List 2 | List 3 | Notes |
|--------------|-----------|------------|------------|--------------|
| | 50~100MHz | 0.1~0.5GHz | 0.5~2.5GHz | |
| C1~C3 | 0.01uF | 1000pF | 56pF | GRM36 MURATA |
| C4, C5 | 10pF | 10pF | 10pF | GRM36 MURATA |

RECOMMENDED PCB DESIGN

(TOP VIEW)

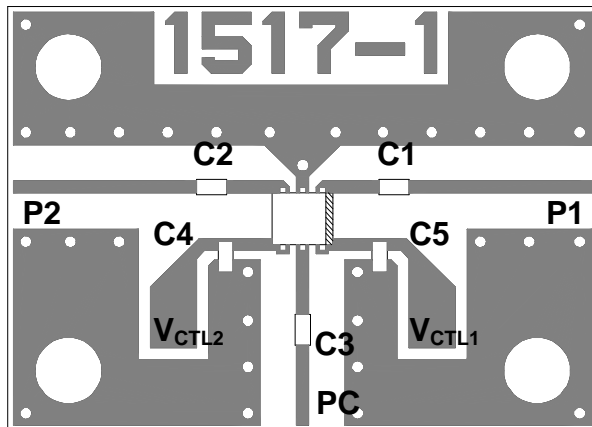


PCB SIZE=19.4x14.0mm
 PCB: FR-4, t=0.2mm
 CAPACITOR: size 1005
 STRIPLINE WIDTH=0.4mm

PRECAUTIONS

- [1] The DC blocking capacitors have to be placed at RF terminal of P1, P2 and PC. Please choose appropriate capacitance values to the application frequency.
- [2] To reduce stripline influence on RF characteristics, please locate bypass capacitors (C4, C5) close to each terminals.
- [3] For good isolation, the GND terminal (2nd pin) must be placed possibly close to ground plane of substrate, and through holes for GND should be placed near by the pin connection.

PACKAGE OUTLINE (FLP6-B2)

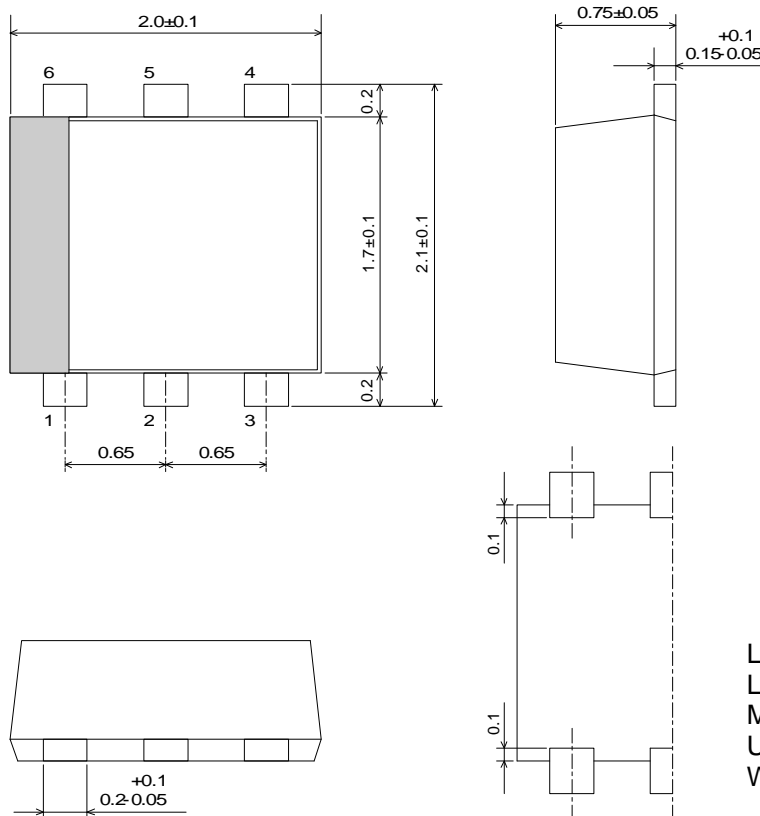

Lead material : Copper
 Lead surface finish: Solder plating
 Molding material : Epoxy resin
 UNIT : mm
 Weight : 6.5mg

Cautions on using this product

This product contains Gallium-Arsenide (GaAs) which is a harmful material.

- Do NOT eat or put into mouth.
- Do NOT dispose in fire or break up this product.
- Do NOT chemically make gas or powder with this product.
- To waste this product, please obey the relating law of your country.

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

This product may be damaged with electric static discharge (ESD) or spike voltage. Please handle with care to avoid these damages.