

## ***300mA Low Dropout Linear Regulator with Shutdown***

### **Description**

The FP6133 is a low dropout, positive linear regulator with very low quiescent current. The FP6133 can supply 300mA output current with low dropout voltage at about 250mV. The BP pin with a 0.1uF bypass capacitor can help reduce the output noise level. The shutdown function can provide remote control for the external signal to decide the on/off state of FP6133. With a logic high level at SHDN pin, the device is in the on state, and vice versa.

The FP6133 regulator is able to operate with output capacitors as small as 1μF for stability. The FP6133 also offers the on chip thermal shutdown feature providing protection against overload or any condition when the ambient temperature exceeds the maximum junction temperature.

The FP6133 offers high precision output voltage of  $\pm 2\%$ . It is available in fixed output voltages including 1.5V, 1.8V, 2.5V, 2.8V, 2.9V, 3.0V, 3.1V, 3.2V, 3.3V and 3.6V.

The FP6133 is housed in low-profile, space-saving SOT-23-5, SC-70-5 and SC-82 packages.

### **Features**


- Low Dropout Voltage of 250mV at 300mA
- High Ripple Rejection at 60 dB
- Guaranteed 60mA Output Current
- Very Low Quiescent Current at 30μA
- Max.  $\pm 2\%$  Output Voltage Accuracy
- Needs Only 1μF Capacitor for Stability
- Thermal Shutdown Protection
- Current Limit Protection
- Active Low Shutdown Control
- Low-ESR Ceramic Capacitor for Output Stability
- Tiny Packages: SOT-23-5, SC-70-5 and SC-82
- RoHS Compliant

### **Applications**


- DSC
- Wireless Devices
- LCD Modules
- Battery Power Systems
- Card Readers
- PDA

**Pin Assignments**

**S5 Package (SOT-23-5)**



**C5 Package (SC-70-5)**



**C8 Package (SC-82)**





Figure 1. Pin Assignment of FP6133

**Ordering Information**

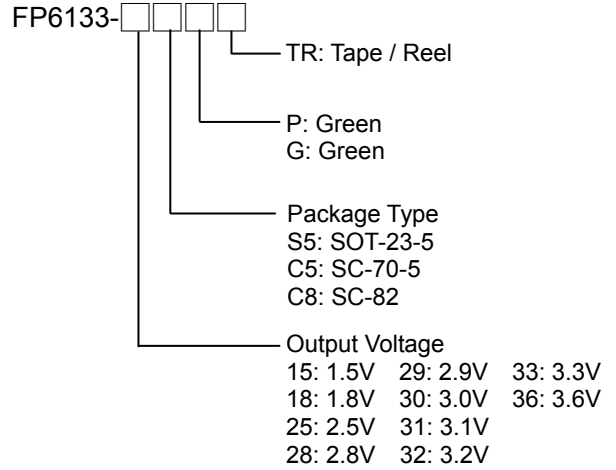

Note1 : Please consult Fitipower sales office or authorized distributors for availability of special output voltages.

**SOT-23-5 Marking**

Part Number	Product Code	Part Number	Product Code
FP6133-15S5P	Fa	FP6133-30S5P	Ff
FP6133-15S5G	Fa=	FP6133-30S5G	Ff=
FP6133-18S5P	Fb	FP6133-31S5P	ft
FP6133-18S5G	Fb=	FP6133-31S5G	ft=
FP6133-25S5P	Fd	FP6133-32S5P	fw
FP6133-25S5G	Fd=	FP6133-32S5G	fw=
FP6133-28S5P	Fe	FP6133-33S5P	fh
FP6133-28S5G	Fe=	FP6133-33S5G	fh=
FP6133-29S5P	Fv	FP6133-36S5P	FH
FP6133-29S5G	Fv=	FP6133-36S5G	FH=

**SC-70-5 Marking**

Part Number	Product Code	Part Number	Product Code
FP6133-15C5P	FA	FP6133-30C5P	FE
FP6133-15C5G	FA=	FP6133-30C5G	FE=
FP6133-18C5P	FB	FP6133-31C5P	FG
FP6133-18C5G	FB=	FP6133-31C5G	FG=
FP6133-25C5P	FC	FP6133-32C5P	Fz
FP6133-25C5G	FC=	FP6133-32C5G	Fz=
FP6133-28C5P	FD	FP6133-33C5P	FF
FP6133-28C5G	FD=	FP6133-33C5G	FF=
FP6133-29C5P	Fx	FP6133-36C5P	FJ
FP6133-29C5G	Fx=	FP6133-36C5G	FJ=

**SC-82 Marking**

Part Number	Product Code	Part Number	Product Code
FP6133-15C8G	E7=	FP6133-30C8G	F4=
FP6133-18C8G	E8=	FP6133-31C8G	F5=
FP6133-25C8G	E9=	FP6133-32C8G	F6=
FP6133-28C8G	F2=	FP6133-33C8G	F7=
FP6133-29C8G	F3=	FP6133-36C8G	F8=

## Typical Application Circuit

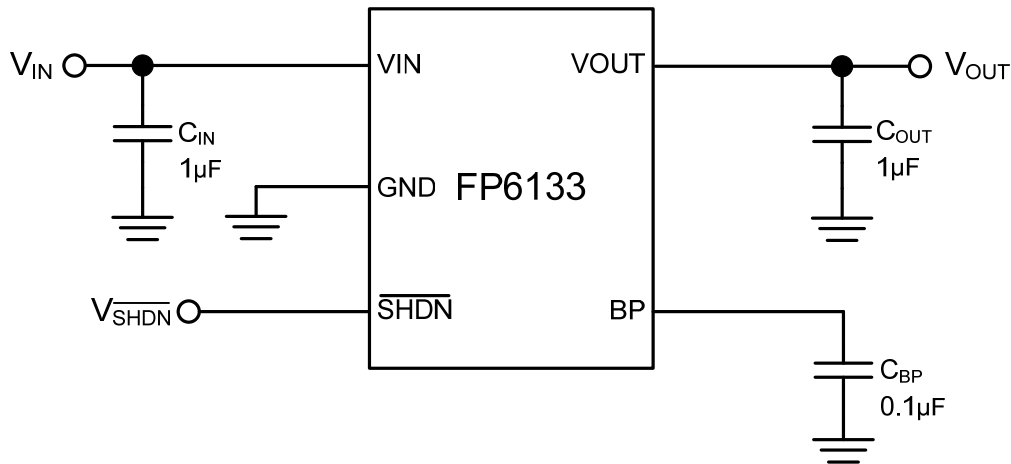


Figure 2. Typical Application Circuit of FP6133

Note2 : To prevent oscillation, it is recommended to use minimum 1µF X7R or X5R dielectric capacitors if ceramics are used as input/output capacitors.

## Functional Pin Description

Pin Name	Pin Function
VIN	Power is supplied to this device from this pin which is required an input filter capacitor. In general, the input capacitor in the range of 1µF to 10µF is sufficient.
VOUT	The output supplies power to loads. The output capacitor is required to prevent output voltage from oscillation. The FP6133 is stable with an output capacitor 1µF or greater. The larger output capacitor will be required for application with larger load transients. The large output capacitor could reduce output noise, improve stability, and PSRR.
GND	Common ground pin
BP	Reference Noise Bypass
$\overline{\text{SHDN}}$	Pull this pin high to enable IC , pull this pin low to shutdown IC

## Block Diagram

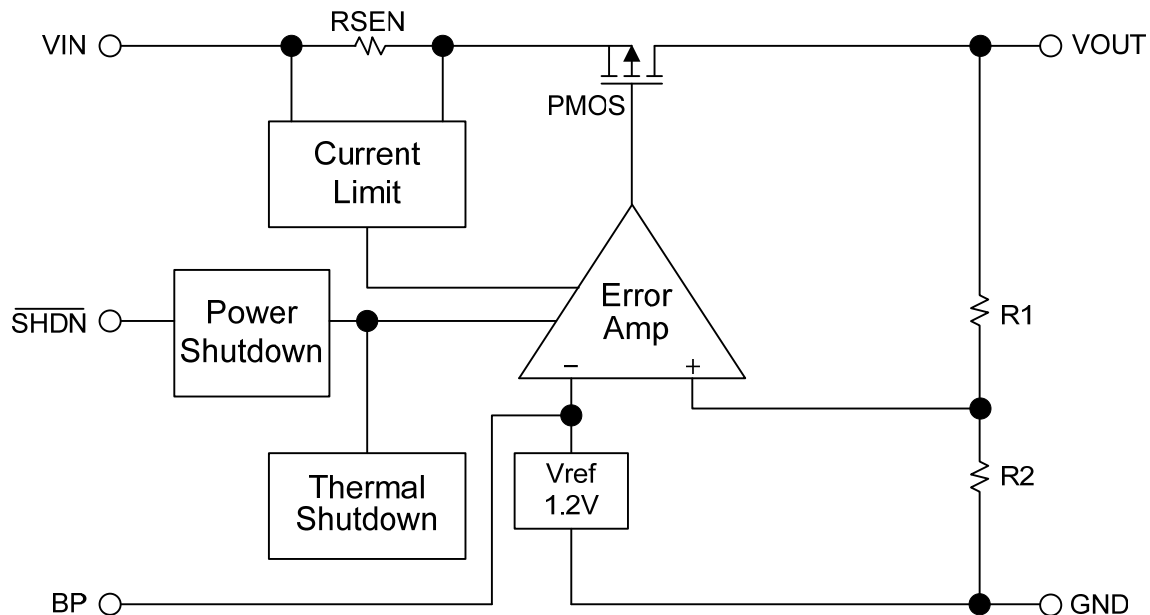


Figure 3. Block Diagram of FP6133

## Absolute Maximum Ratings

- Supply Input Voltage ( $V_{IN}$ )----- + 6V
- Maximum Junction Temperature ( $T_J$ )----- + 150°C
- Power Dissipation @25°C( $P_D$ ):
  - SOT-23-5 ----- + 0.4W
  - SC-70-5 ----- + 0.3W
  - SC-82 ----- + 0.2W
- Package Thermal Resistance( $\theta_{JA}$ ):
  - SOT-23-5----- + 250°C/W
  - SC-70-5 ----- + 330°C/W
  - SC-82 ----- + 500°C/W
- Storage Temperature Range ( $T_S$ )----- - 65°C to + 150°C
- Lead Temperature (Soldering, 10 sec.) ( $T_{LEAD}$ )----- + 260°C

Note3 : Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

## Recommended Operating Conditions

- Input Voltage ( $V_{IN}$ )----- + 2.8V to + 5.5V
- Operating Temperature Range ( $T_{OPR}$ )----- - 40°C to + 85°C

## Electrical Characteristics

( $V_{IN}=V_{OUT}+1V$  or  $V_{IN}=2.8V$  whichever is greater,  $\overline{SHDN}$  pin connected to  $V_{IN}$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit	
Current Limit	$I_{LIMIT}$	$R_{Load}=1\Omega$	300			mA	
Quiescent Current	$I_Q$	$I_O=0mA$		30	50	$\mu A$	
Standby Current	$I_{STBY}$	$V_{IN}=2.8\sim 5V$ , Output Off			0.1	$\mu A$	
Output Voltage Accuracy	$\Delta V_{OUT}$	$I_O=1mA$	-2		+2	%	
Dropout Voltage (Note4)	$V_{DROP}$	$I_O=300mA$	$V_{OUT}=1.5V$		1250	1390	mV
			$V_{OUT}=1.8V$		1050	1170	
			$V_{OUT}=2.5V$		460	560	
			$V_{OUT}=3.0V$		340	400	
			$V_{OUT}=3.3V$		250	300	
Line Regulation	$\Delta V_{LINE}$	$I_O=1mA$ , $V_{IN}=V_{OUT}+1V$ to 5V		1	5	mV	
Load Regulation (Note5)	$\Delta V_{LOAD}$	$I_O=0mA$ to 300mA		6	20	mV	
Ripple Rejection (Note6)	PSRR	$V_{IN}=V_{OUT}+1V$ , $C_{BP}=0.1\mu F$ $f_{RIPPLE}=120Hz$ , $C_{OUT}=1\mu F$		60		dB	
Temperature Coefficient (Note6)	T.C.	$I_{OUT}=1mA$ , $V_{IN}=5V$		50		ppm/ $^\circ C$	
Thermal Shutdown Temperature (Note6)	$T_{SD}$			160		$^\circ C$	
	$\Delta T_{SD}$	Hysteresis		25		$^\circ C$	
Shutdown Pin Current	$I_{\overline{SHDN}}$				0.1	$\mu A$	
Noise Bypass Terminal Voltage	$V_{REF}$			1.23		V	
Shutdown Pin Voltage	$V_{\overline{SHDN}(ON)}$	Output ON	1.4			V	
	$V_{\overline{SHDN}(OFF)}$	Output OFF			0.4	V	
Shutdown Exit Delay Time (Note6)	$\Delta T$	$C_{BP}=0.1\mu F$ , $C_{OUT}=1\mu F$ , $I_{OUT}=30mA$		300		$\mu s$	

Note4 : The dropout voltage is defined as  $V_{IN}-V_{OUT}$ , which is measured when  $V_{OUT}$  drops 2% of its normal value with the specified output current.

Note5 : Load regulation and dropout voltage are measured at a constant junction temperature by using a 40ms low duty cycle current pulse.

Note6 : Guarantee by design.

### Typical Performance Curves

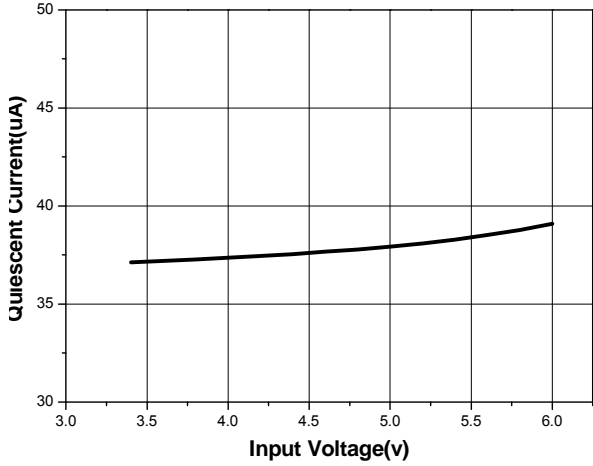


Figure 4. Quiescent Current vs. Input Voltage

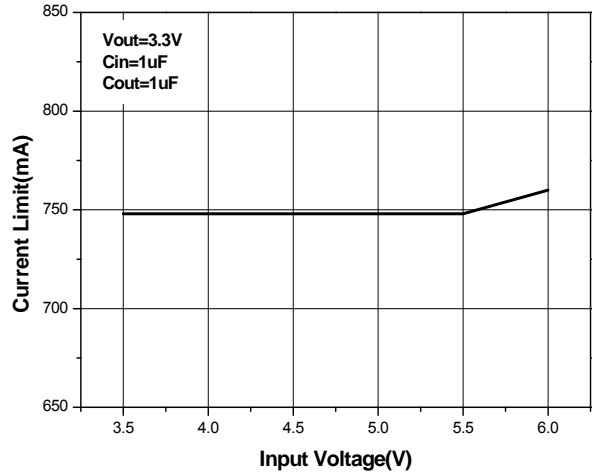


Figure 5. Current limit vs. Input Voltage

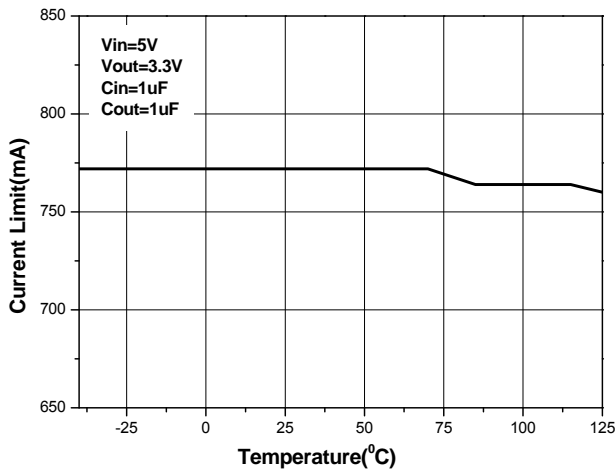


Figure 6. Current Limit vs. Temperature

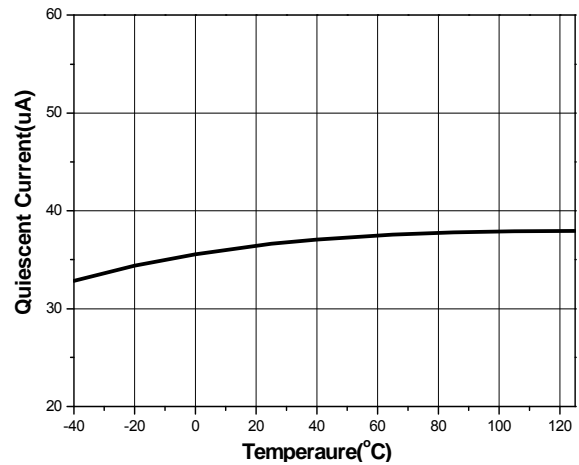


Figure 7. Quiescent Current vs. Temperature

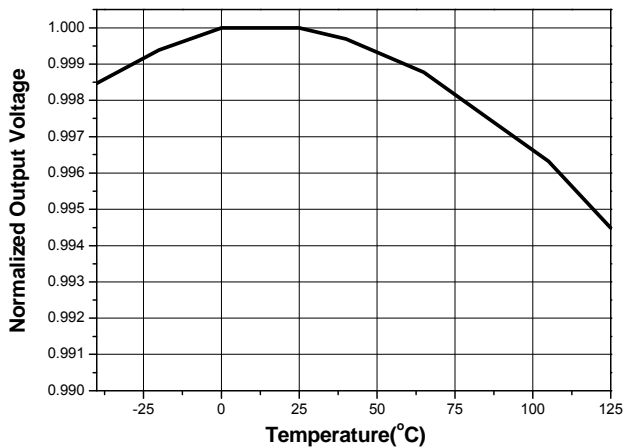


Figure 8. Output Voltage vs. Temperature

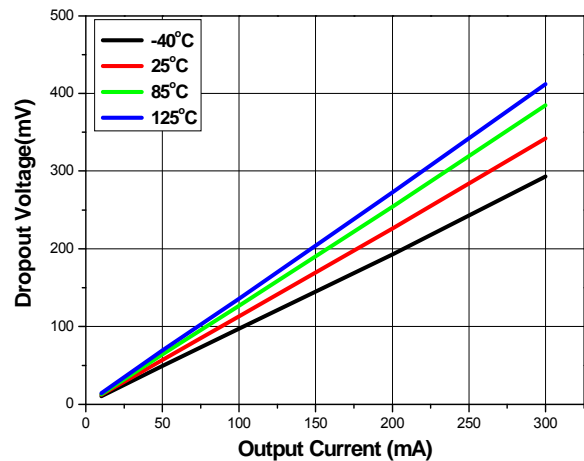


Figure 9. Dropout Voltage vs. Temperature ( $V_{OUT}=2.8V$ )

Typical Performance Curves (Continued)

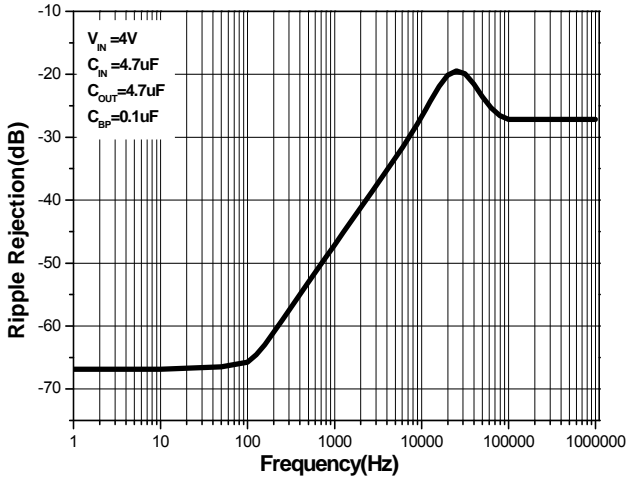


Figure 10. Ripple Rejection vs. Frequency

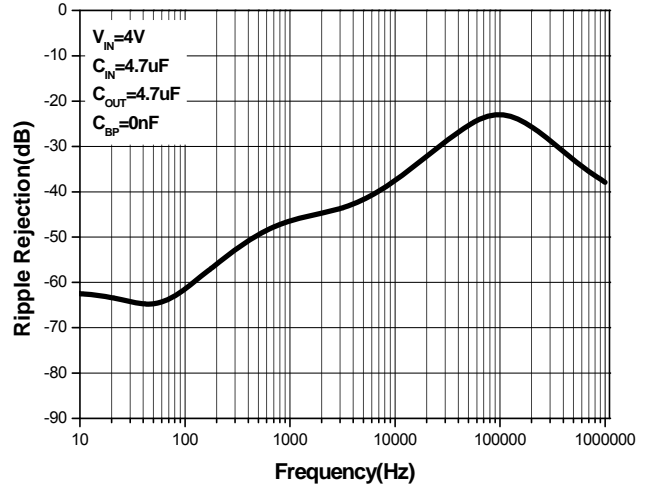


Figure 11. Ripple Rejection vs. Frequency

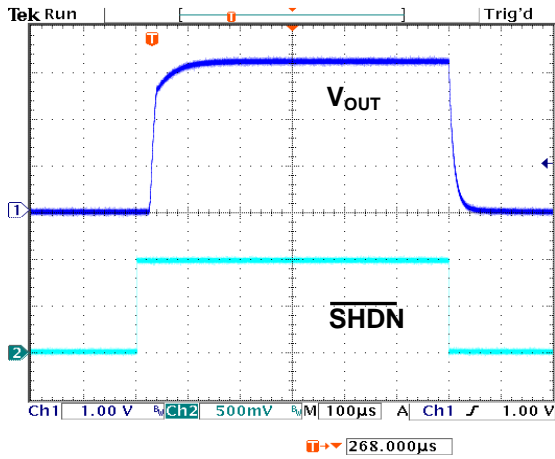


Figure 12. Shutdown Function

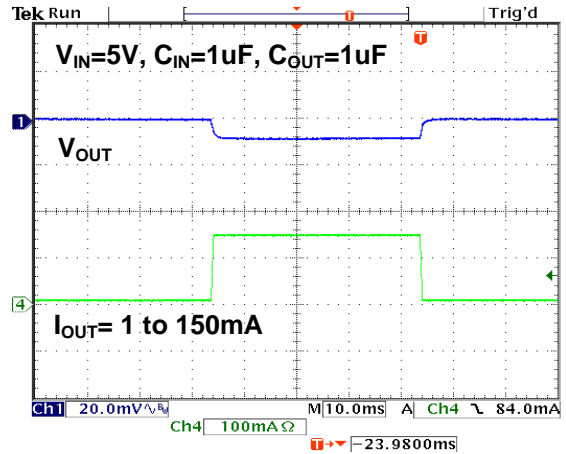


Figure 13. Load Transient Response

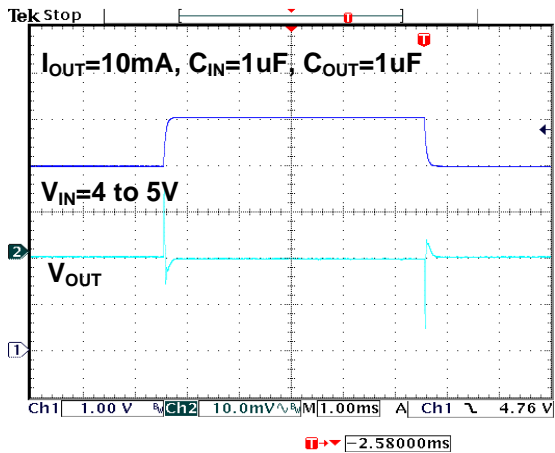


Figure 14. Line Transient Response

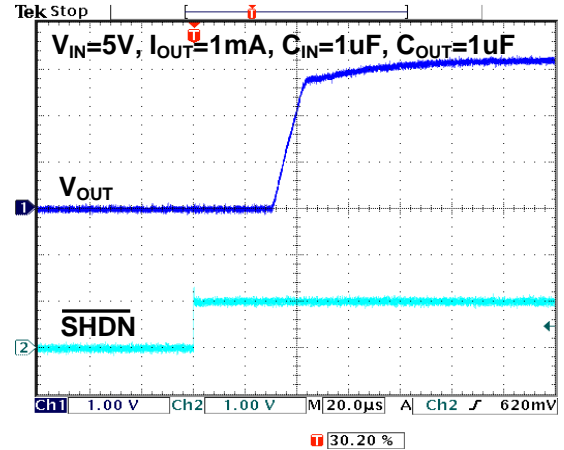


Figure 15. Shutdown Exit Delay Time

## Application Information

The FP6133 is a low dropout linear regulator that could provide 300mA output current at dropout voltage about 250mV. Current limit and on chip thermal shutdown features provide protection against any combination of overload or ambient temperature that could exceed maximum junction temperature.

### Output and Input Capacitor

The FP6133 regulator is designed to be stable with a wide range of output capacitors. The ESR of the output capacitor affects stability. Larger value of the output capacitor decreases the peak deviations and improves transient response for larger current changes.

The capacitor types (aluminum, ceramic, and tantalum) have different characterizations such as temperature and voltage coefficients. All ceramic capacitors are manufactured with a variety of dielectrics, each with different behavior across temperature and applications. Common dielectrics used are X5R, X7R and Y5V. It is recommended to use 1uF to 10uF X5R or X7R dielectric ceramic capacitors with 30mΩ to 50mΩ ESR range between device outputs and ground for stability. The FP6133 is designed to be stable with low ESR ceramic capacitors and higher values of capacitors and ESR could improve output stability. The ESR of output capacitor is very important because it generates a zero to provide phase lead for loop stability.

There are no requirements for the ESR on the input capacitor, but its voltage and temperature coefficient have to be considered for device application environment.

### Protection Features

In order to prevent overloading or thermal condition from damaging the device, FP6133 has internal thermal and current limiting functions designed to protect the device. It will rapidly shut off PMOS pass element during over temperature condition.

### Thermal Consideration

The power handling capability of the device will be limited by allowable operation junction temperature (125°C). The power dissipated by the device will be estimated by  $P_D = I_{OUT} \times (V_{IN} - V_{OUT})$ . The power dissipation should be lower than the maximum power dissipation listed in "Absolute Maximum Ratings" section.



### Shutdown Operation

The FP6133 is shutdown by pulling the  $\overline{\text{SHDN}}$  input low, and turned on by driving the  $\overline{\text{SHDN}}$  high. If this function is not used, the  $\overline{\text{SHDN}}$  input should be tied to VIN to keep the regulator on at all times (the  $\overline{\text{SHDN}}$  must not be left floating).




**Outline Information**

**SOT-23-5 Package (Unit: mm)**


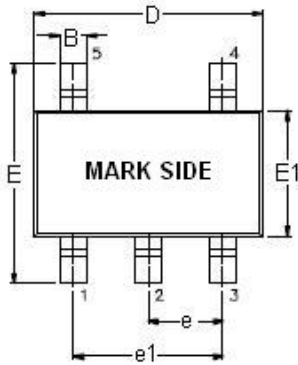


SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	1.00	1.20
A1	0.00	0.10
A2	1.00	1.10
B	0.35	0.50
D	2.80	3.00
E	2.60	3.00
E1	1.50	1.70
e	0.90	1.00
e1	1.80	2.00
L	0.35	0.55


Note : Followed From JEDEC MO-178-C.



**SC-70-5 Package (Unit: mm)**




SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.90	1.10
A1	0.00	0.10
A2	0.90	1.00
b	0.15	0.35
D	1.80	2.20
E1	1.80	2.40
E	1.15	1.35
e	0.55	0.75
L	0.26	0.46



**Outline Information (Continued)**

**SC- 82 Package (Unit: mm)**

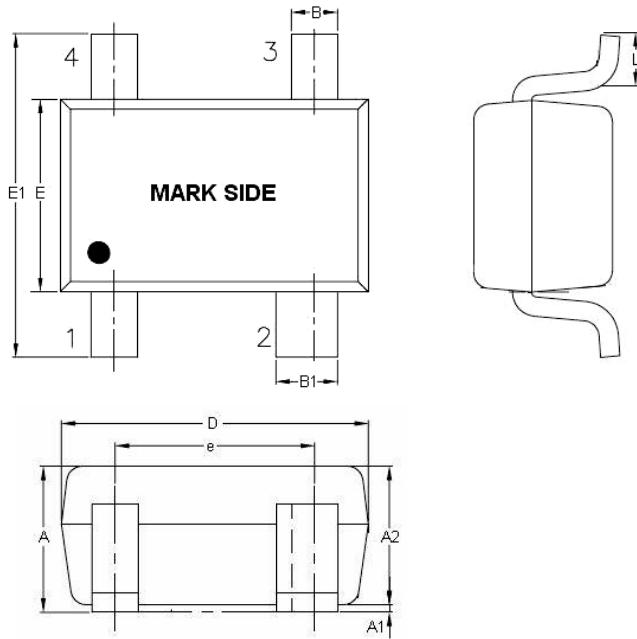

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.80	1.10
A1	0.00	0.10
A2	0.80	1.00
B	0.25	0.40
B1	0.35	0.50
D	1.80	2.20
E	1.15	1.35
E1	1.80	2.40
e	1.20	1.40
L	0.25	0.45

**Life Support Policy**

Fitipower's products are not authorized for use as critical components in life support devices or other medical systems.