

SANYO	No.2516	2SB1295/2SD1935
		PNP/NPN Epitaxial Planar Silicon Transistors Low-Frequency General-Purpose Amp Applications

Applications

- . AF power amp, medium-speed switching, small-sized motor drivers

Features

- . Large current capacity
- . Low collector to emitter saturation voltage
- . Very small-sized package permitting sets to be made smaller and slimer

(): 2SB1295

Absolute Maximum Ratings at Ta=25°C

Collector to Base Voltage	V_{CB0}	(-)15	V	unit
Collector to Emitter Voltage	V_{CE0}	(-)15	V	
Emitter to Base Voltage	V_{EB0}	(-)5	V	
Collector Current	I_C	(-)0.8	A	
Collector Current(Pulse)	I_{CP}	(-)3	A	
Collector Dissipation	P_C	200	mW	
Junction Temperature	T_J	150	°C	
Storage Temperature	T_{stg}	-55 to +150	°C	

Electrical Characteristics at Ta=25°C

			min	typ	max	unit
Collector Cutoff Current	I_{CB0}	$V_{CB}=(-)12V, I_E=0$			(-)100	nA
Emitter Cutoff Current	I_{EB0}	$V_{EB}=(-)4V, I_C=0$			(-)100	nA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=(-)2V, I_C=(-)50mA$	135*		900* (600)	
Gain-Bandwidth Product	f_T	$V_{CE}=(-)2V, I_C=(-)800mA$ $V_{CE}=(-)2V, I_C=(-)50mA$	80	200 (300)		MHz
Output Capacitance	c_{ob}	$V_{CB}=(-)10V, f=1MHz$		(15)10		pF

Continued on next page.

*: The 2SB1295/2SD1935 are classified by 50mA h_{FE} as follows:

2SB1295	135	5	270	200	6	400	300	7	600
---------	-----	---	-----	-----	---	-----	-----	---	-----


2SD1935	135	5	270	200	6	400	300	7	600	450	8	900
---------	-----	---	-----	-----	---	-----	-----	---	-----	-----	---	-----

Marking : 2SB1295:UL/2SD1935:CT

h_{FE} rank: 2SB1295:5,6,7/2SD1935:5,6,7,8

Package Dimensions 2018A

(unit:mm)






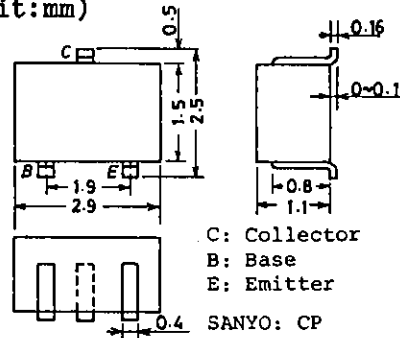


SANYO Electric Co., Ltd. Semiconductor Business Headquarters









TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN


Continued from preceding page.

			min	typ	max	unit
C-E Saturation Voltage	$V_{CE(sat)1}$	$I_C = (-)5mA, I_B = (-)0.5mA$	(-)10	(-)25		mV
	$V_{CE(sat)2}$	$I_C = (-)400mA, I_B = (-)20mA$	(-)100	(-)200		mV
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = (-)400mA, I_B = (-)20mA$	(-)0.9	(-)1.2		V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu A, I_E = 0$	(-)15			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	(-)15			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)10\mu A, I_C = 0$	(-)5			V

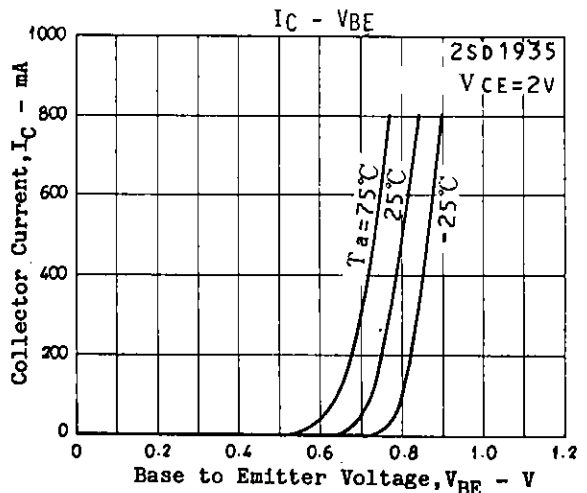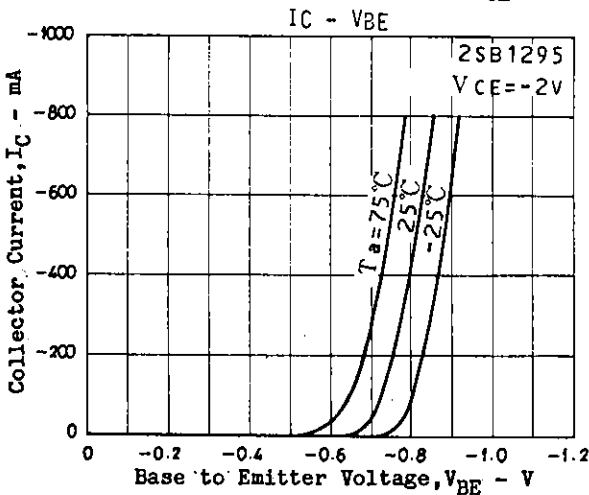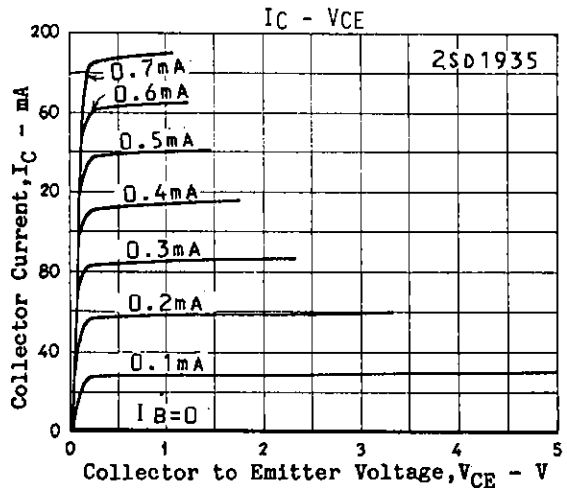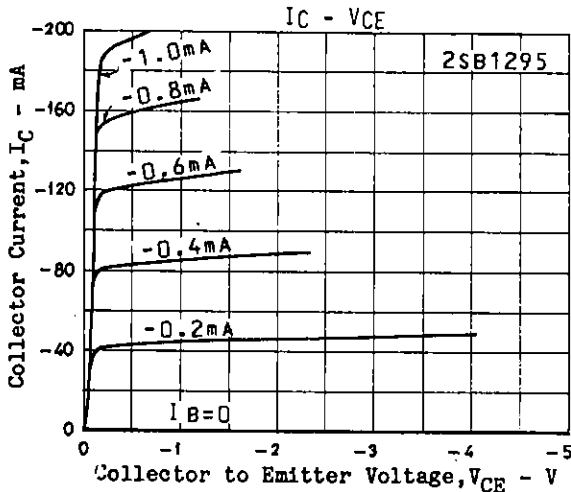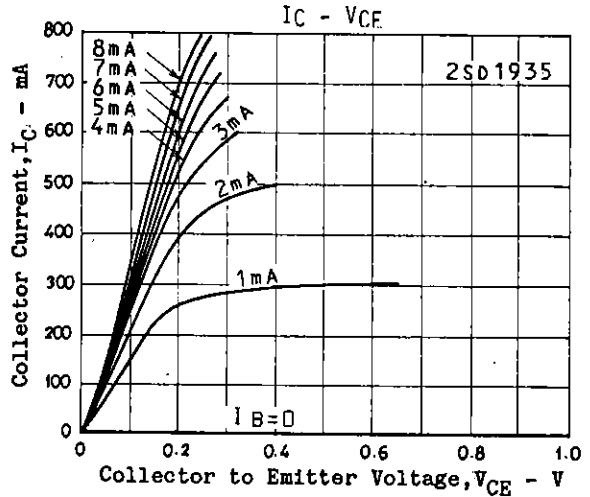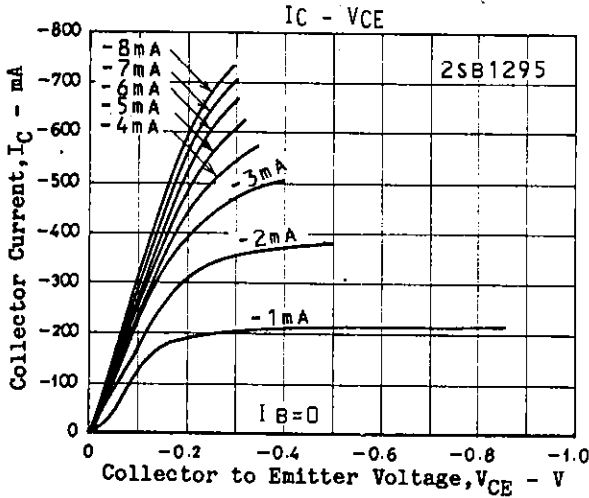

2SB1295/2SD1935

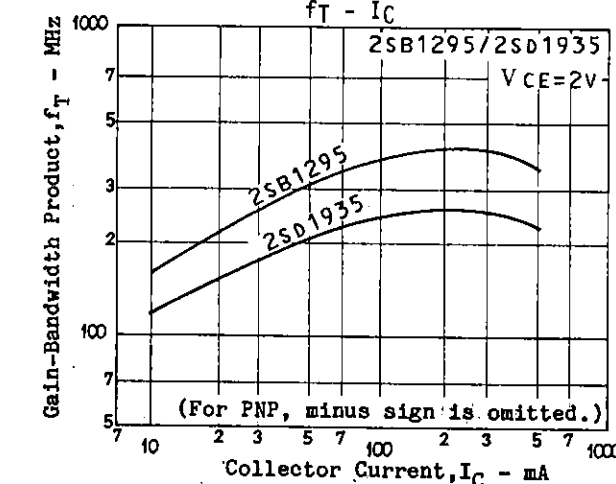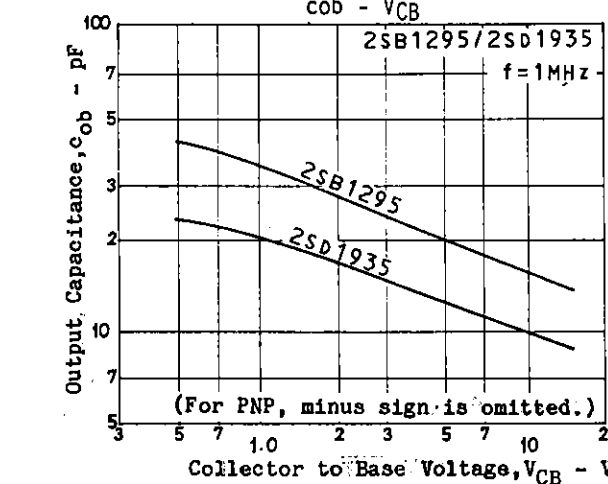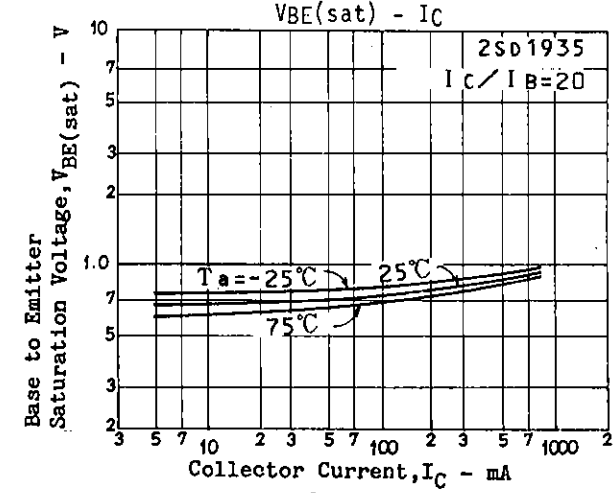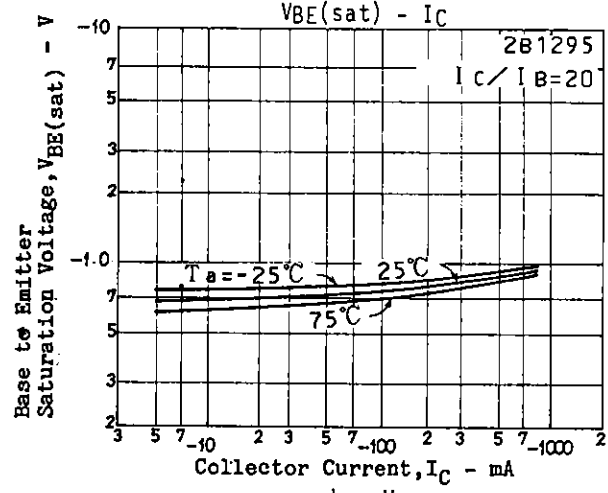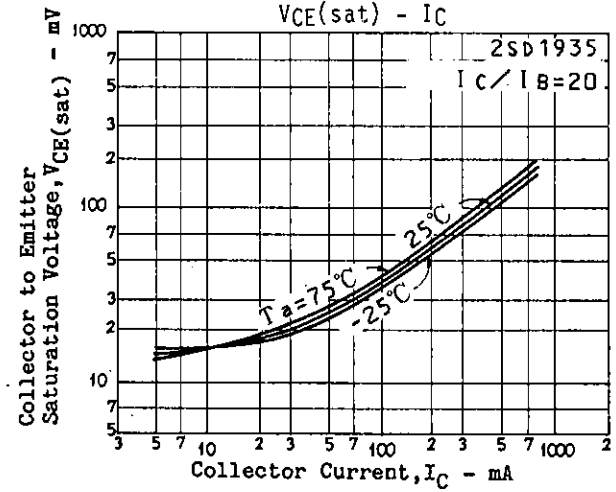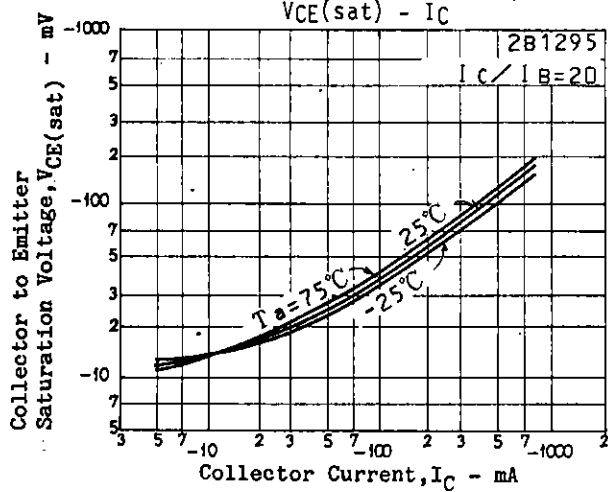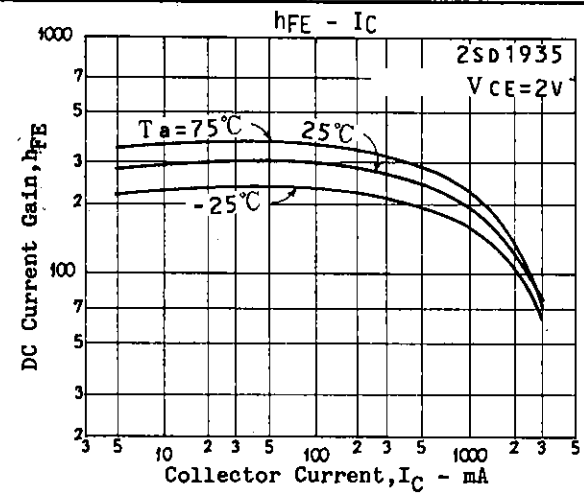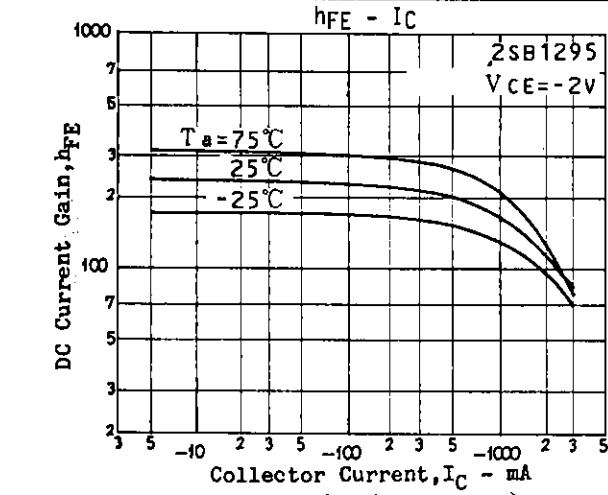

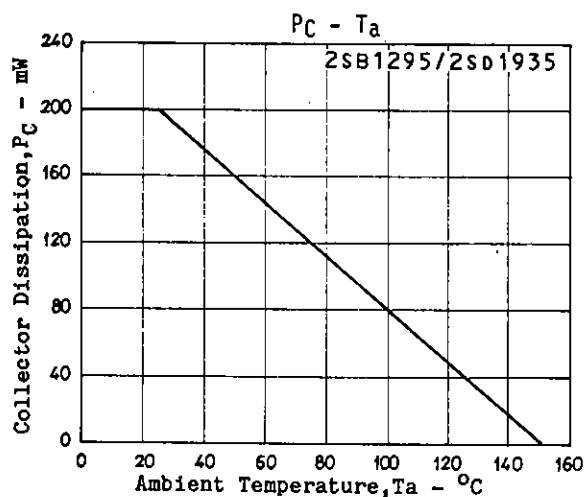

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.