



Silicon Variable Capacitance Diodes

- For FM radio tuners with extended frequency band
- High tuning ratio at low supply voltage (car radio)
- Monolithic chip (common cathode) for perfect dual diode tracking
- Coded capacitance groups and group matching available

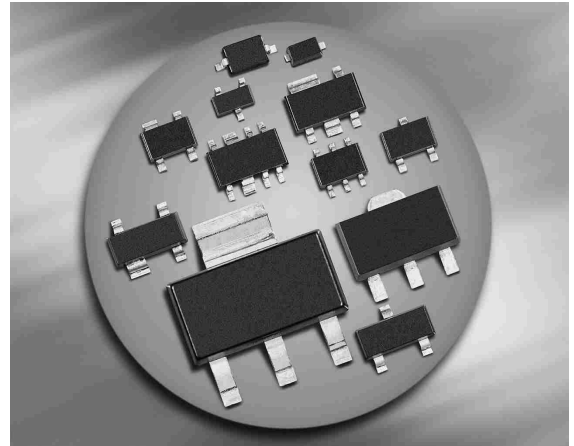

BB814



Type	Package	Configuration	L_S (nH)	Marking
BB814	SOT23	common cathode	1.8	SH1/2*

*For differences see next page Capacitance groups

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	18	V
Peak reverse voltage-	V_{RM}	20	
Forward current	I_F	50	mA
Operating temperature range	T_{op}	-55 ... 125	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 ... 150	

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Reverse current	I_R				nA
$V_R = 16\text{ V}$		-	-	20	
$V_R = 16\text{ V}, T_A = 60\text{ }^{\circ}\text{C}$		-	-	200	
AC Characteristics					
Diode capacitance ¹⁾	C_T				pF
$V_R = 2\text{ V}, f = 1\text{ MHz}$		43	44.75	46.5	
$V_R = 8\text{ V}, f = 1\text{ MHz}$		19.1	20.8	22.7	
Capacitance ratio	C_{T2}/C_{T8}	2.05	2.15	2.25	
$V_R = 2\text{ V}, V_R = 8\text{ V}, f = 1\text{ MHz}$					
Capacitance matching ²⁾	$\Delta C_T/C_T$	-	-	3	%
$V_R = 2\text{ V}, V_R = 8\text{ V}, f = 1\text{ MHz}$					
Series resistance	r_S	-	0.18	-	Ω
$V_R = 2\text{ V}, f = 100\text{ MHz}$					
Q factor	Q	-	200	-	
$f = 100\text{ MHz}, V_R = 2\text{ V}$					


¹Capacitance groups at 2V and 8V, coded 1; 2

C_T /groups	1	2
C_{2V} min	43pF	44.5pF
C_{2V} max	45pF	46.5pF
C_{8V} min	19.1pF	19.75pF
C_{8V} max	21.95pF	22.7pF

²For details please refer to Application Note 047.

Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

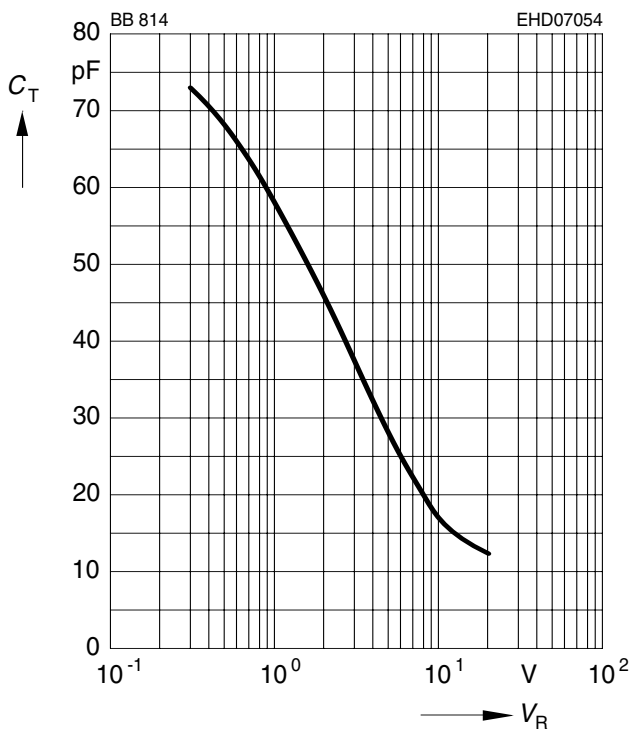

Capacitance ratio $C_{Tref}/C_T = f(V_R)$

$f = 1\text{MHz}$

