

# SHINDENGEN

## Schottky Rectifiers (SBD)

Dual

### DF20SC9M

90V 20A

#### FEATURES

SMT

T<sub>j</sub>150

P<sub>RRSM</sub> avalanche guaranteed

High current capacity with Small Package

#### APPLICATION

Switching power supply

DC/DC converter


Home Appliances, Office Equipment

Telecommunication

#### OUTLINE DIMENSIONS

Case : STO-220

Unit : mm

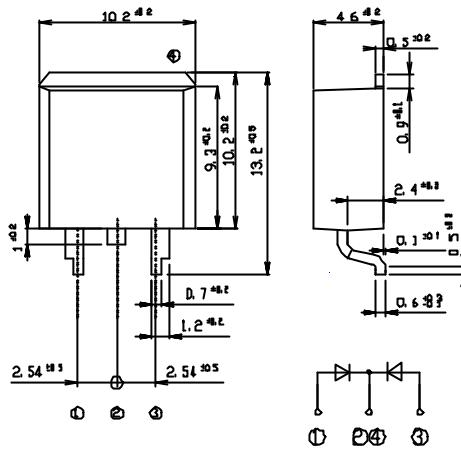

#### RATINGS


Absolute Maximum Ratings (If not specified T<sub>c</sub>=25 )


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-40 ~ 150	
Operating Junction Temperature	T <sub>j</sub>		150	
Maximum Reverse Voltage	V <sub>RM</sub>		90	V
Repetitive Peak Surge Reverse Voltage	V <sub>RRSM</sub>	Pulse width 0.5ms, duty 1/40	100	V
Average Rectified Forward Current	I <sub>o</sub>	50Hz sine wave, R-load. Rating for each diode I <sub>o</sub> /2. T <sub>c</sub> =111	20	A
Peak Surge Forward Current	I <sub>FSM</sub>	50Hz sine wave, Non-repetitive 1 cycle peak value, T <sub>j</sub> =25	200	A
Repetitive Peak Surge Reverse Power	P <sub>RRSM</sub>	Pulse width 10 μ s. Rating of per diode. T <sub>j</sub> =25	660	W

Electrical Characteristics (If not specified T<sub>c</sub>=25 )


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =10A, Pulse measurement. Rating of per diode	Max.0.75	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement, Rating of per diode	Max.10	mA
Junction Capacitance	C <sub>j</sub>	f=1MHz, V <sub>R</sub> =10V, Rating of per diode	Typ.370	pF
Thermal Resistance	j <sub>c</sub>	junction to case	Max.1.6	/W

## DF20SC9M Forward Voltage


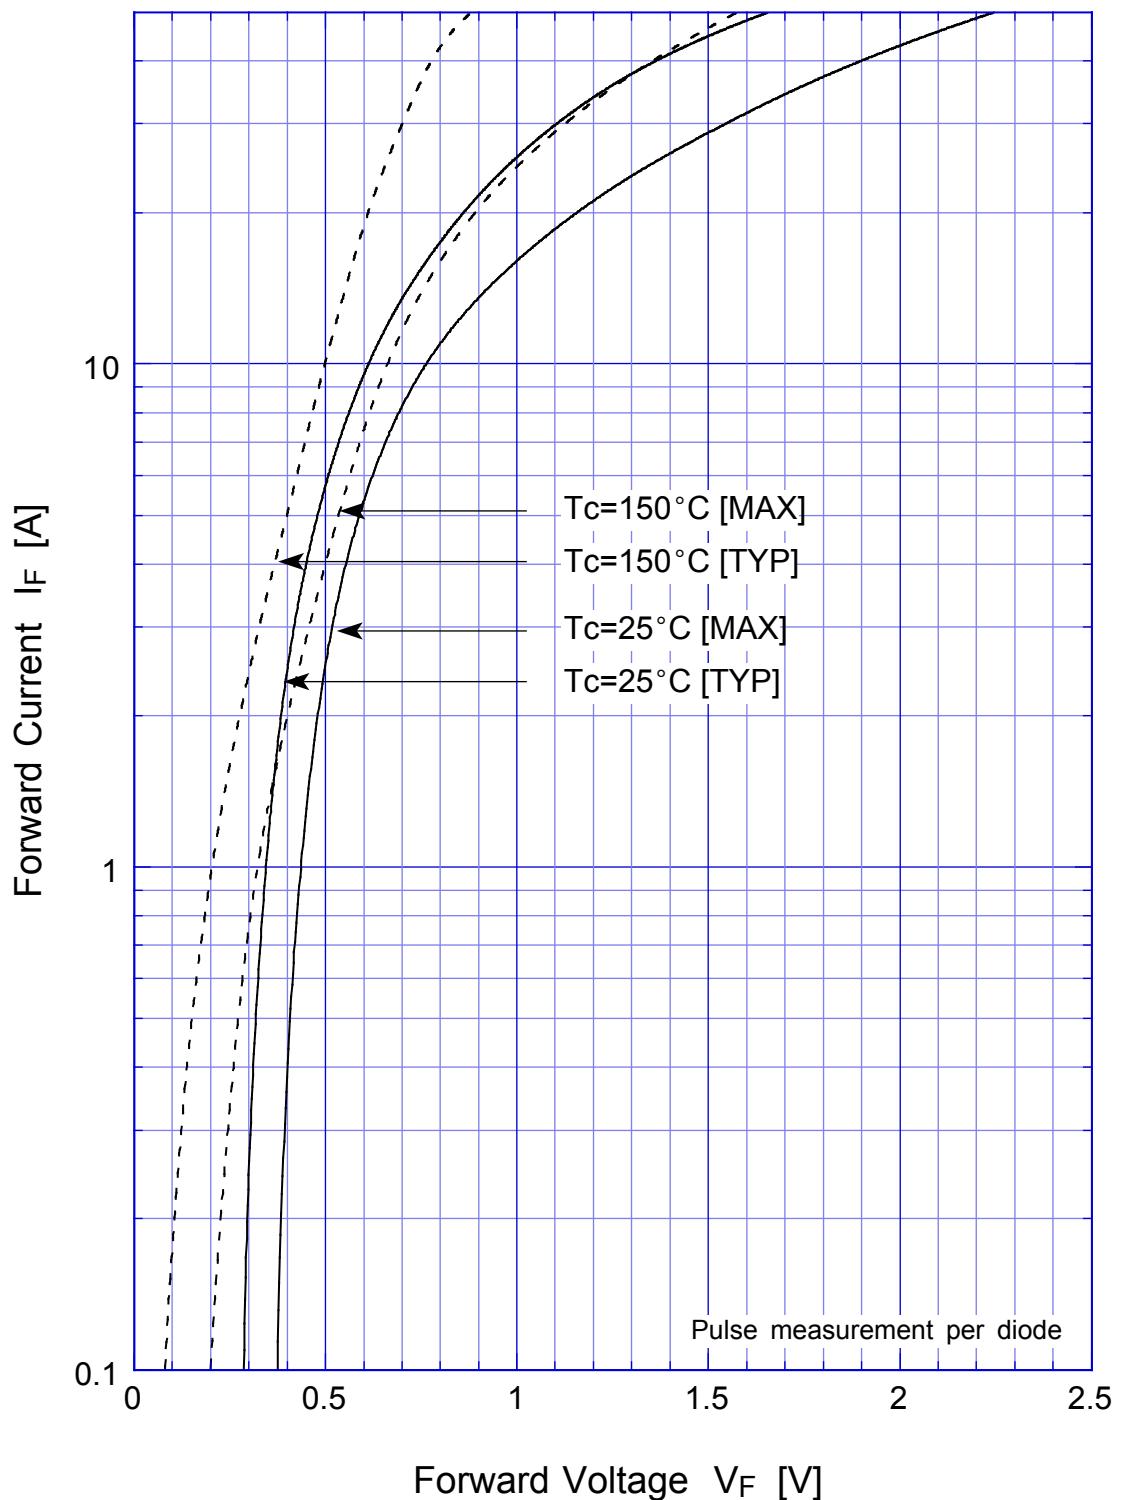


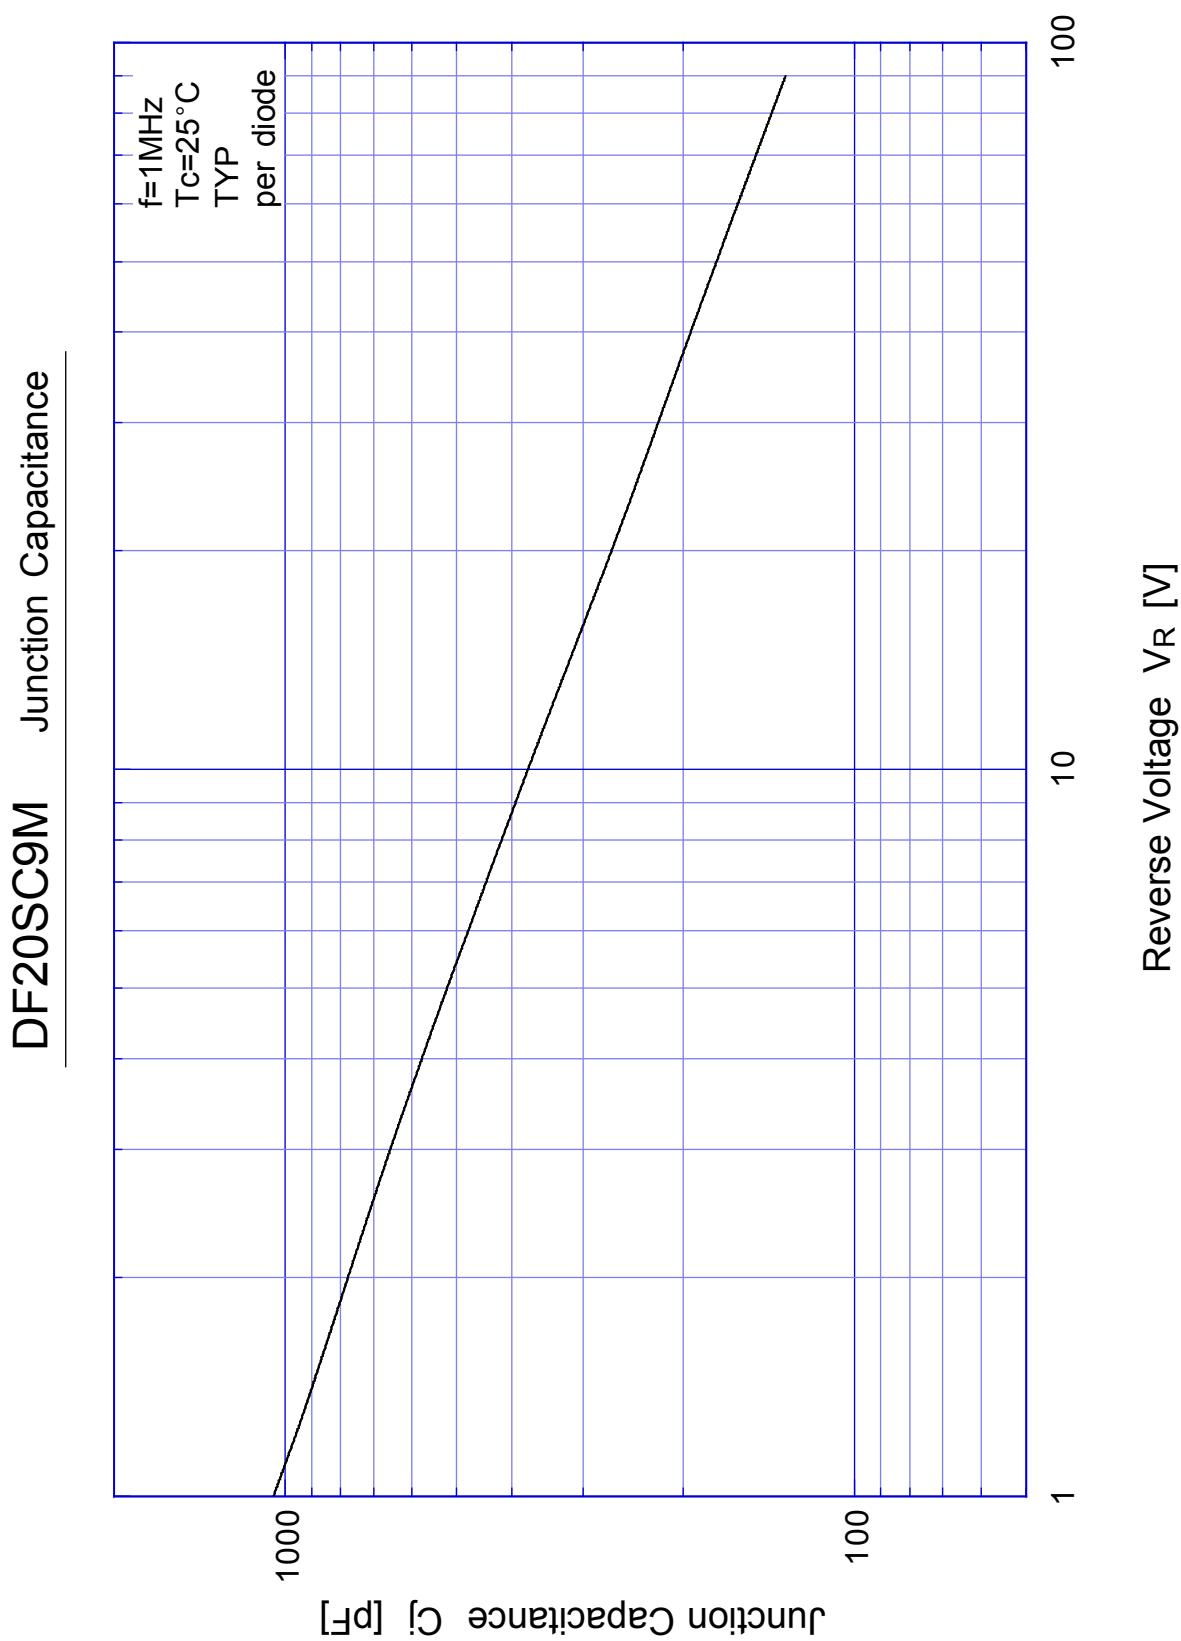



# DF20SC9M Reverse Current


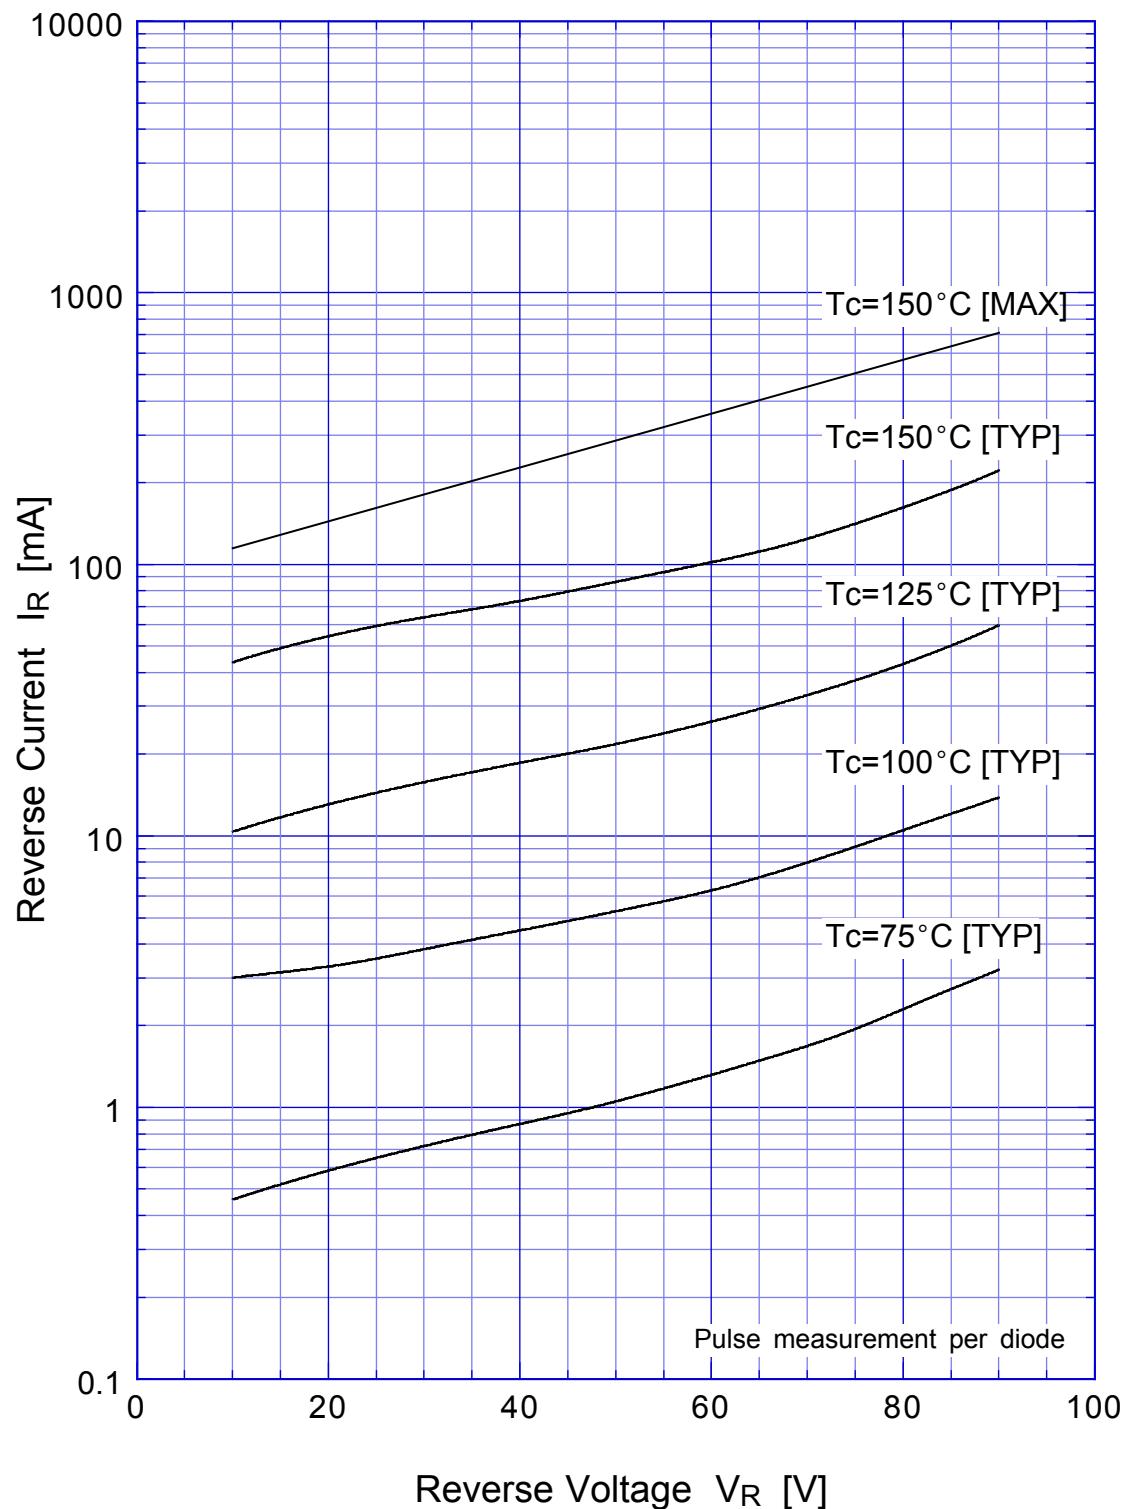


## DF20SC9M Reverse Power Dissipation

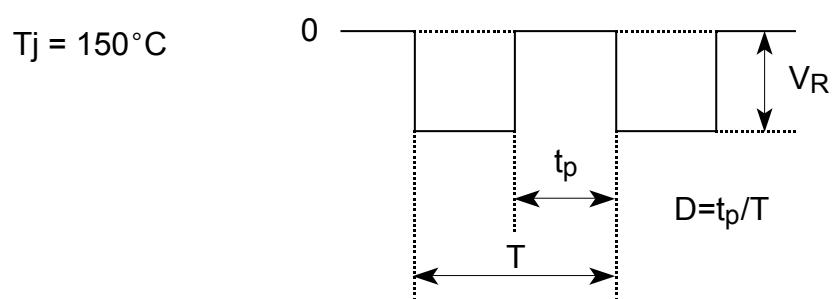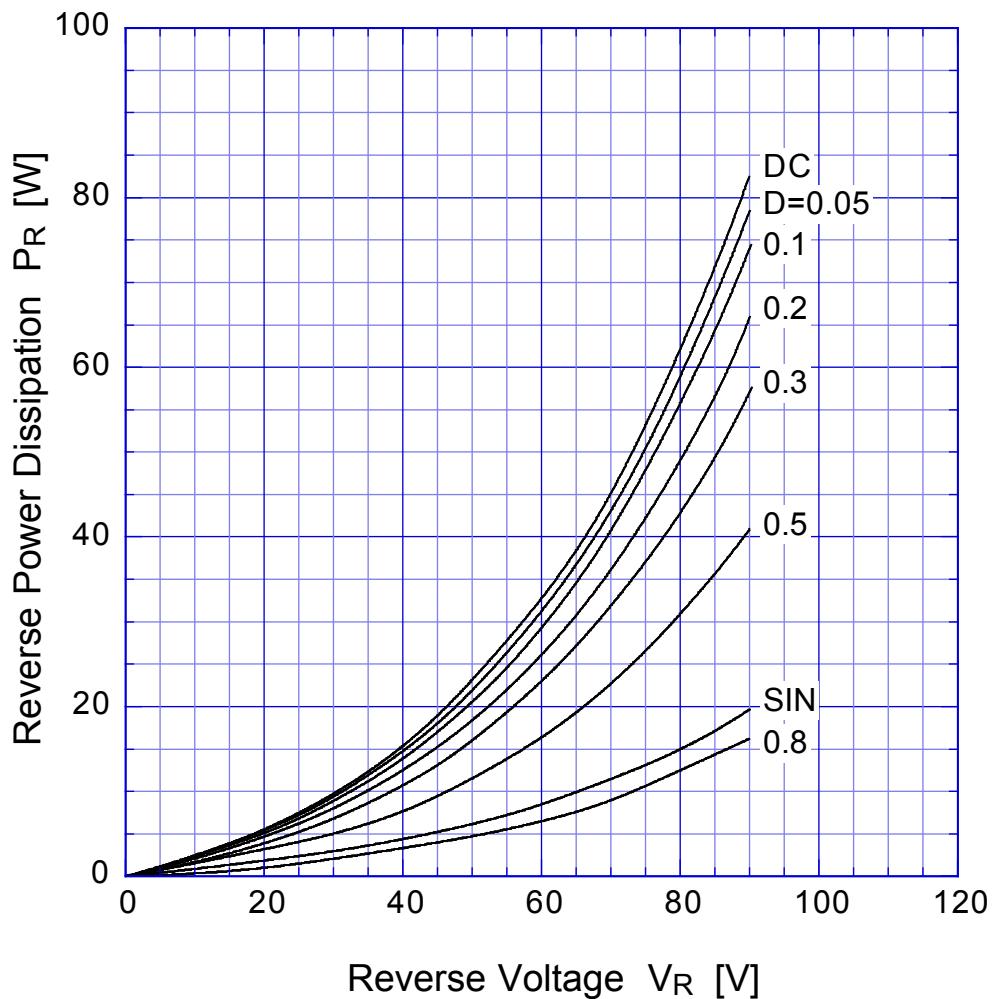


## DF20SC9M Forward Power Dissipation

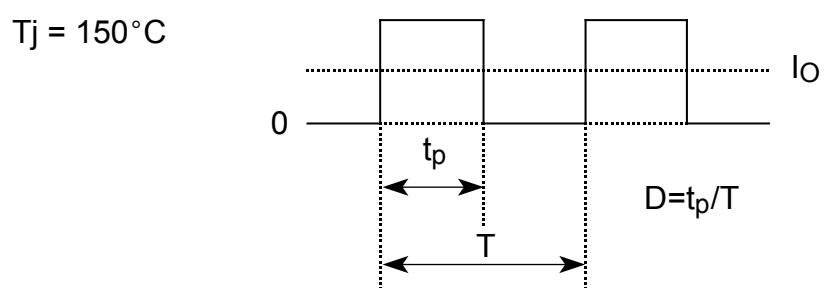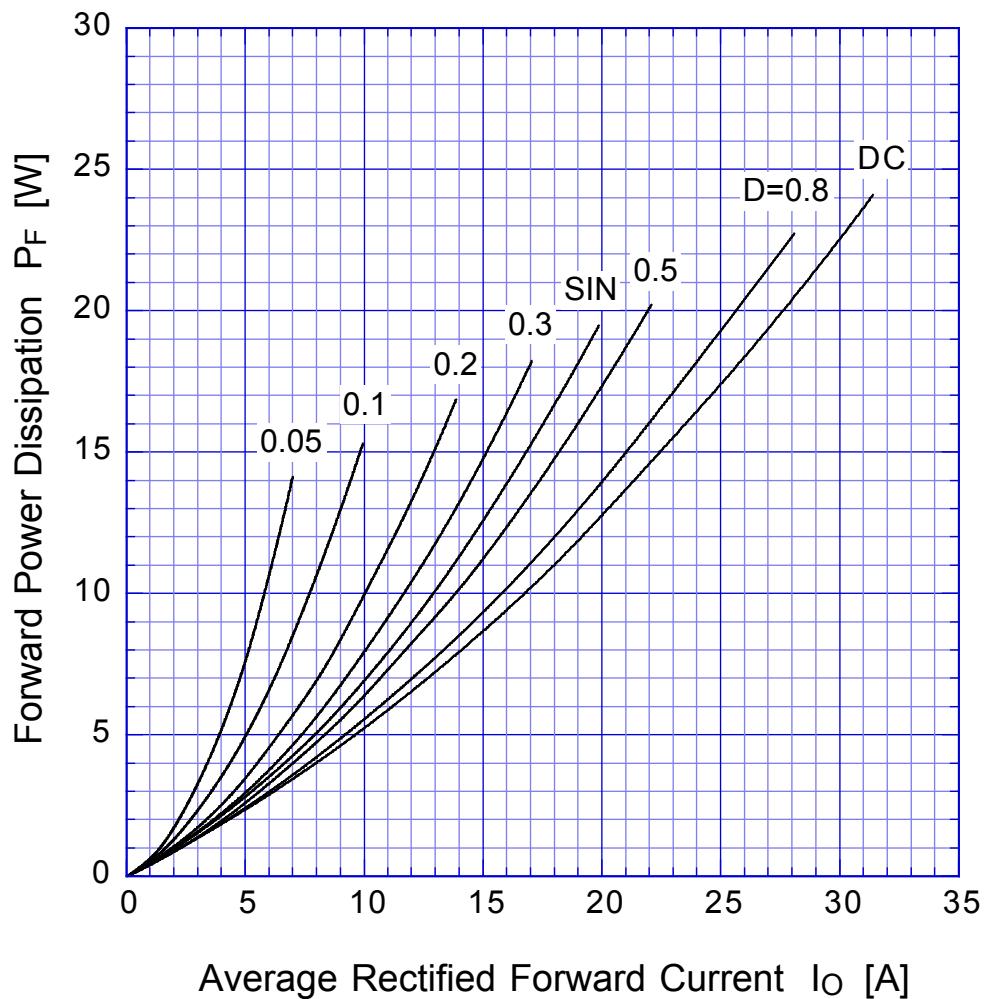

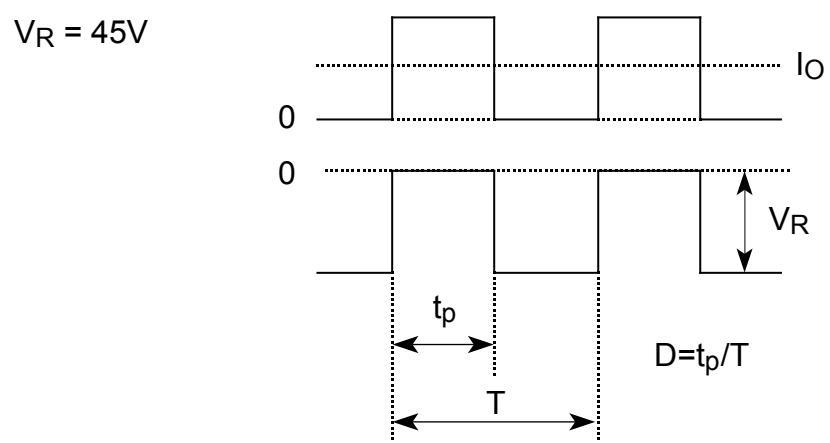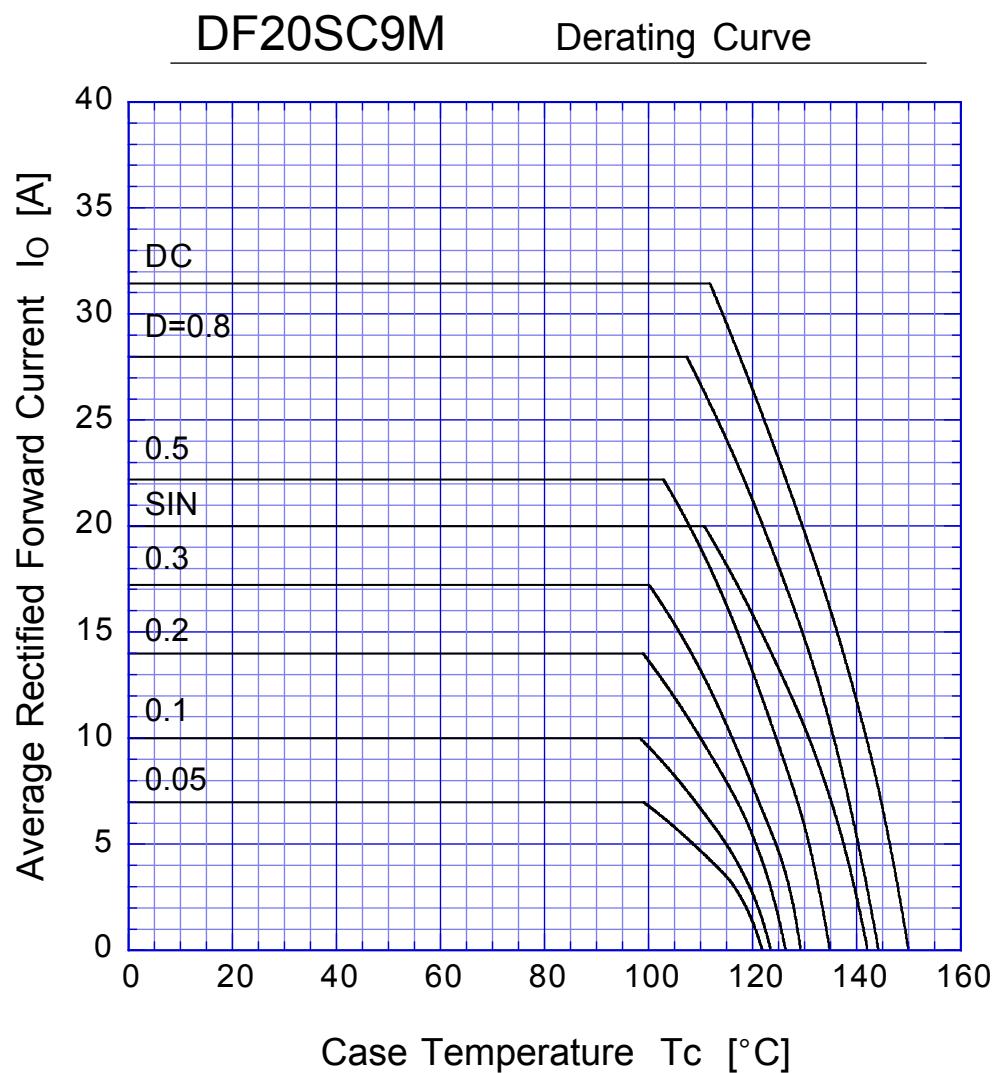

## DF20SC9M Peak Surge Forward Capability

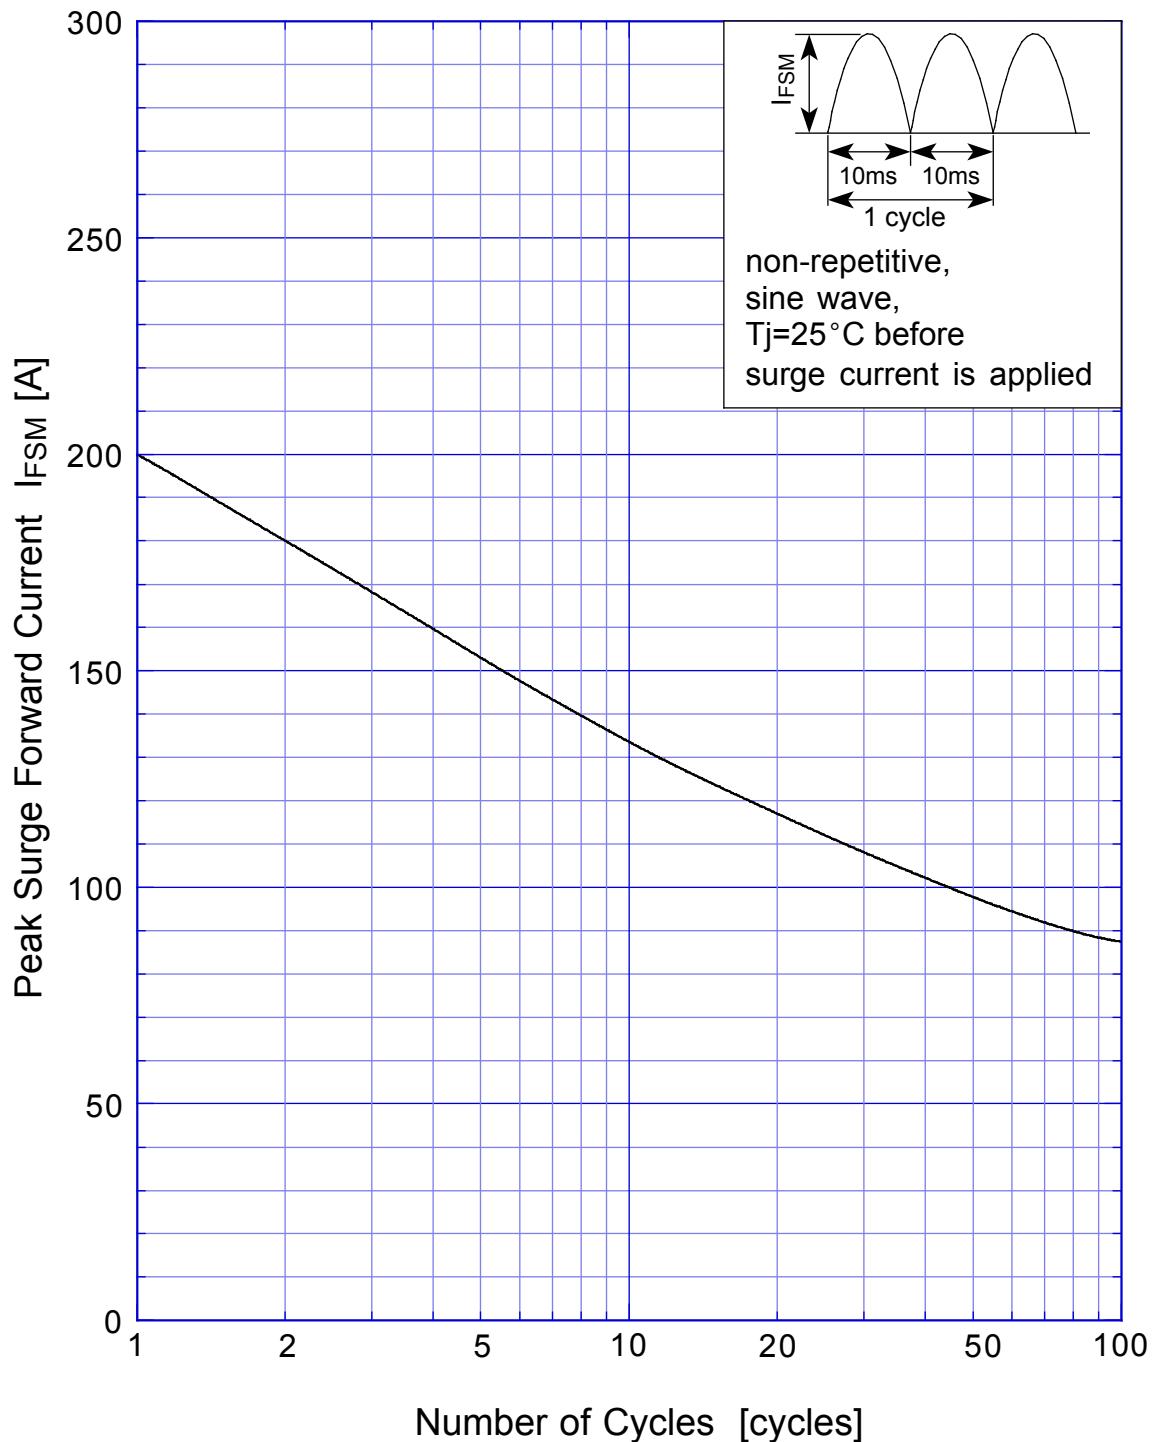

## SBD Repetitive Surge Reverse Power Derating Curve



## SBD Repetitive Surge Reverse Power Capability

