


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(k Ω)	R2(k Ω)
KRC107S	10	47
KRC108S	22	47
KRC109S	47	22

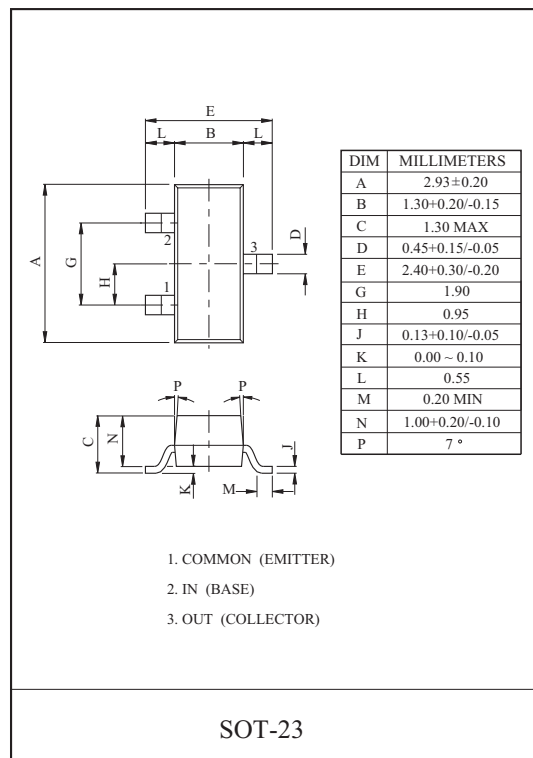


MAXIMUM RATING (Ta=25℃)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC107S~109S	V_O	50	V
Input Voltage	KRC107S	V_I	30, -6	V
	KRC108S		40, -7	
	KRC109S		40, -15	
Output Current	KRC107S~109S	I_O	100	mA
Power Dissipation		P_D	200	mW
Junction Temperature		T_j	150	℃
Storage Temperature Range		T_{stg}	-55~150	℃

MARK SPEC

TYPE	KRC107S	KRC108S	KRC109S
MARK	NH	NI	NJ

Marking

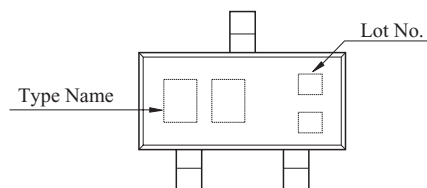







KRC107S~KRC109S

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Output Cut-off Current		KRC107S~109S	I _{O(OFF)}	V _O =50V, V _I =0	-	-	500	nA
DC Current Gain	KRC107S	G _I	V _O =5V, I _O =10mA	80	150	-		
	KRC108S			80	150	-		
	KRC109S			70	140	-		
Output Voltage		KRC107S~109S	V _{O(ON)}	I _O =10mA, I _I =0.5mA	-	0.1	0.3	V
Input Voltage (ON)	KRC107S	V _{I(ON)}	V _O =0.2V, I _O =5mA	-	1.2	1.8	V	
	KRC108S			-	1.8	2.6		
	KRC109S			-	3.0	5.8		
Input Votlage (OFF)	KRC107S	V _{I(OFF)}	V _O =5V, I _O =0.1mA	0.5	0.75	-	V	
	KRC108S			0.6	0.88	-		
	KRC109S			1.5	1.82	-		
Transition Frequency		KRC107S~109S	f _T *	V _O =10V, I _O =5mA	-	200	-	MHz
Input Current	KRC107S	I _I	V _I =5V	-	-	0.88	mA	
	KRC108S			-	-	0.36		
	KRC109S			-	-	0.16		
Switching Time	Rise Time	KRC107S	V _O =5V, V _{IN} =5V R _L =1k Ω	-	0.05	-	μS	
		KRC108S		-	0.12	-		
		KRC109S		-	0.26	-		
	Storage Time	KRC107S		-	2.0	-		
		KRC108S		-	2.4	-		
		KRC109S		-	1.5	-		
	Fall Time	KRC107S		-	0.36	-		
		KRC108S		-	0.4	-		
		KRC109S		-	0.41	-		

Note : * Characteristic of Transistor Only.

KRC107S~KRC109S

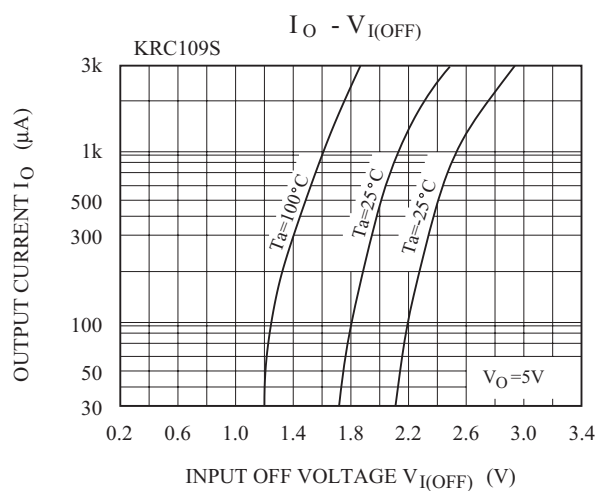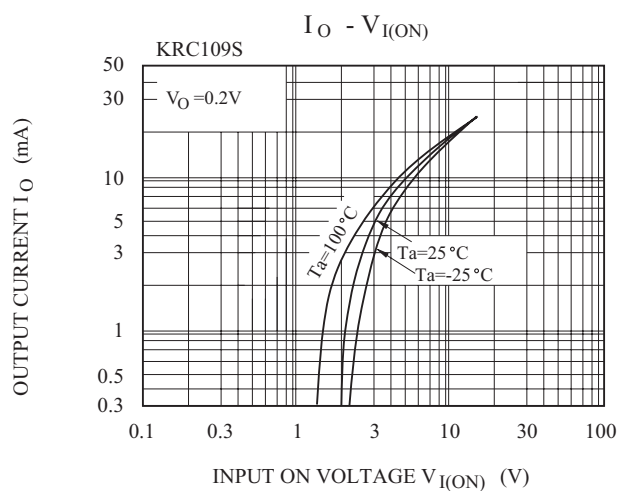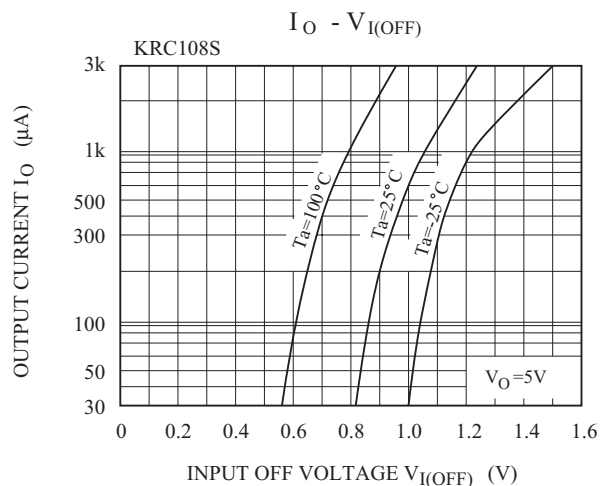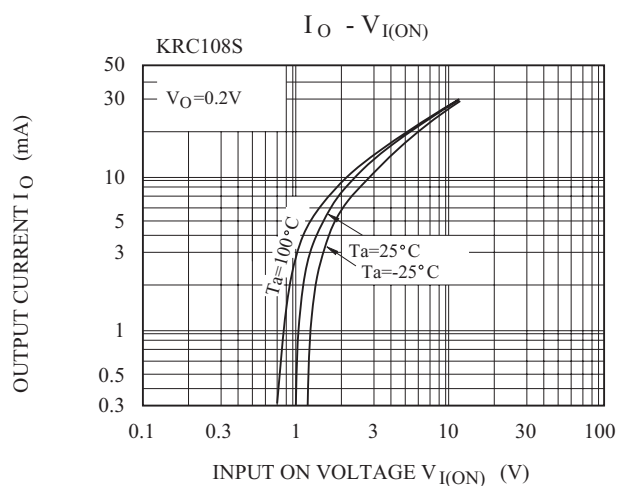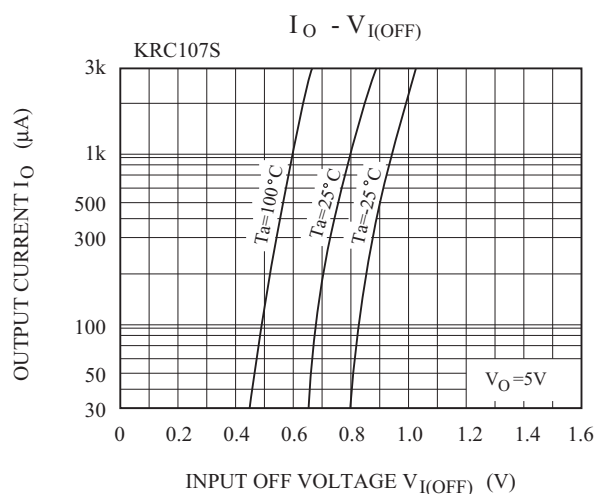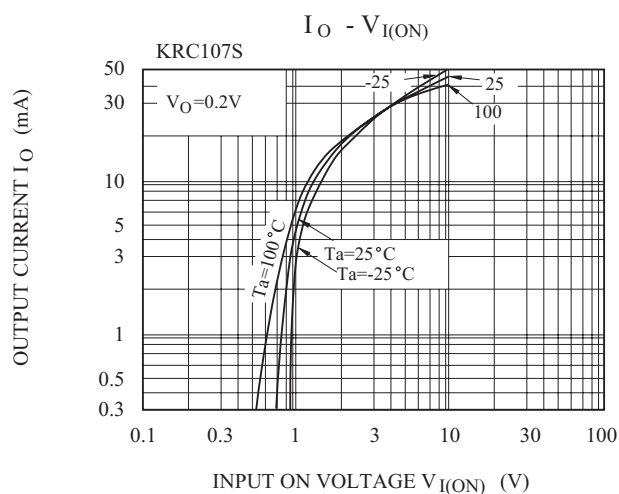

KRC107S~KRC109S

