

2SA1563, 2SC4047



2018A

PNP/NPN Epitaxial Planar
Silicon Transistors

T-37-13
T-35-11

Switching Applications (with Bias Resistances R1=10kΩ, R2=47kΩ)

©2380

Applications

- Switching circuit, inverter circuit, interface circuit, driver circuit

Features

- On-chip bias resistance (R1=10kohms, R2=47kohms)
- Small-sized package (CP)

(): 2SA1563

Absolute Maximum Ratings at Ta=25°C

			unit
Collector to Base Voltage	V _{CB0}	(-)50	V
Collector to Emitter Voltage	V _{CE0}	(-)50	V
Emitter to Base Voltage	V _{EB0}	(-)6	V
Collector Current	I _C	(-)100	mA
Peak Collector Current	i _{cp}	(-)200	mA
Collector Dissipation	P _C	200	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{stg}	-55 to +150	°C


Electrical Characteristics at Ta=25°C

			min	typ	max	unit
Collector Cutoff Current	I _{CB0}	V _{CB} =(-)40V, I _E =0			(-)0.1	uA
Collector Cutoff Current	I _{CE0}	V _{CE} =(-)40V, I _B =0			(-)0.5	uA
Emitter Cutoff Current	I _{EB0}	V _{EB} =(-)5V, I _C =0	(-)67	(-)88	(-)125	uA
DC Current Gain	h _{FE}	V _{CE} =(-)5V, I _C =(-)5mA	70			
Gain-Bandwidth Product	f _T	V _{CE} =(-)10V, I _C =(-)5mA		250		MHz
				(200)		
Output Capacitance	C _{ob}	V _{CB} =(-)10V, f=1MHz		3.7		pF
				(5.5)		
C-E Saturation Voltage	V _{CE(sat)}	I _C =(-)10mA, I _B =(-)0.5mA	(-)0.1	(-)0.3		V
C-B Breakdown Voltage	V _{(BR)CBO}	I _C =(-)10uA, I _E =0	(-)50			V
C-E Breakdown Voltage	V _{(BR)CEO}	I _C =(-)100uA, R _{BE} =∞	(-)50			V


Continued on next page.

Marking 2SA1563:RL, 2SC4047:ZY

Electrical Connection

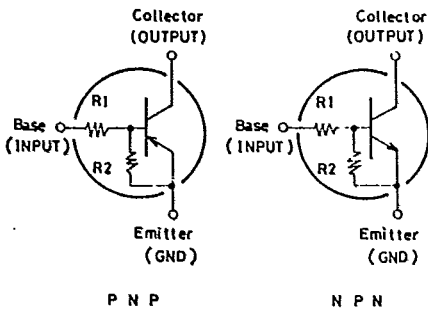

Case Outline 2018A (unit:mm)



C: Collector
B: Base
E: Emitter
SANYO: CP





2SA1563/2SC4047

T-37-13

T-35-11

Continued from preceding page.









			min	typ	max	unit
Input OFF-State Voltage	$V_{I(off)}$	$V_{CE}=(-)5V, I_C=(-)100\mu A$	$(-)0.5$	$(-)0.7$	$(-)0.9$	V
Input ON-State Voltage	$V_{I(on)}$	$V_{CE}=(-)0.2V, I_C=(-)5mA$	$(-)0.7$	$(-)1.0$	$(-)2.0$	V
Input Resistance	R_I		7	10	13	kohm
Resistance Ratio	R_1/R_2		0.193	0.213	0.234	

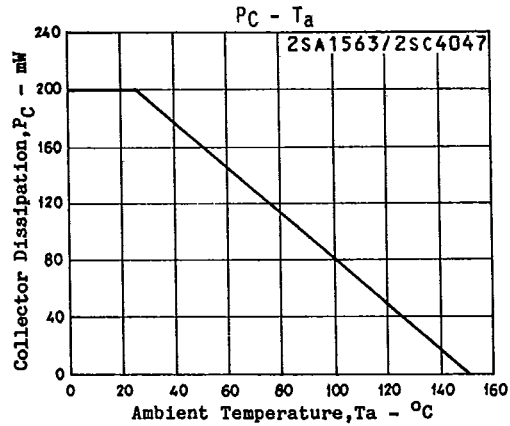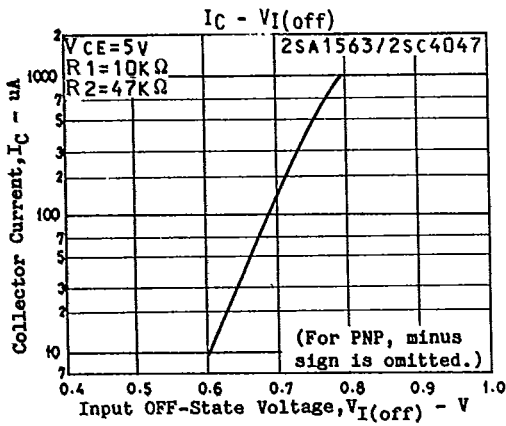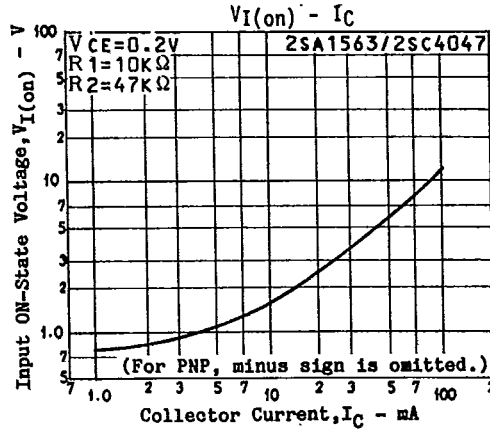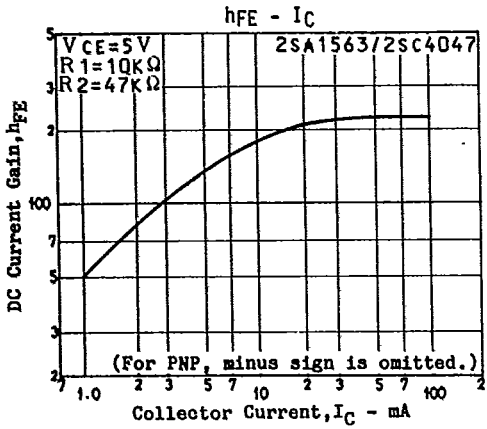

T-91-20


CASE OUTLINES OF SURFACE MOUNT TRANSISTORS

- All of Sanyo surface mount transistor case outlines are illustrated below.
- All dimensions are in mm, and dimensions which are not followed by min. or max. are represented by typical values.
- No marking is indicated.

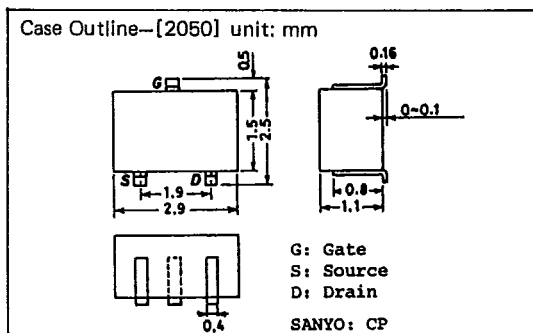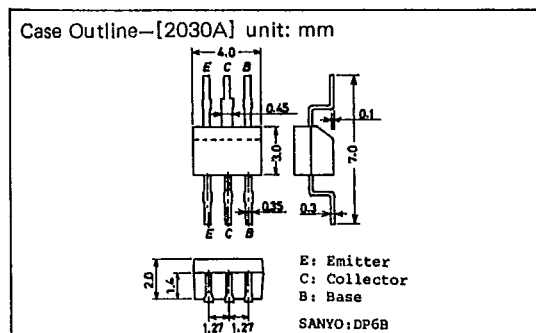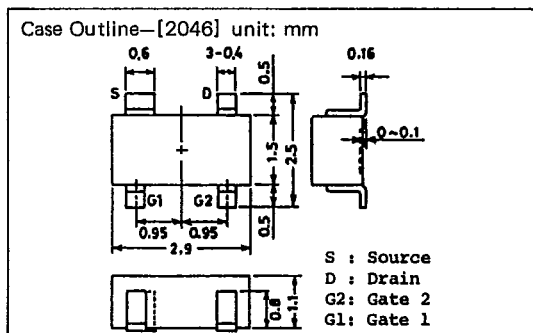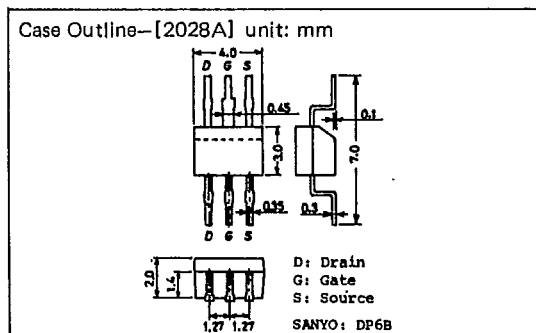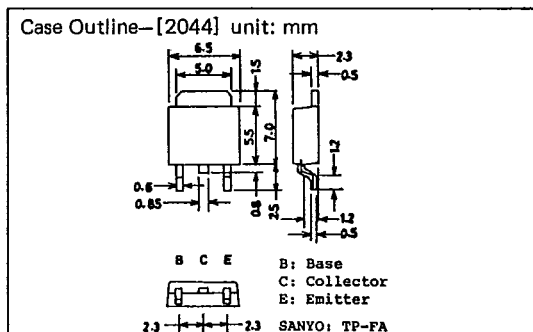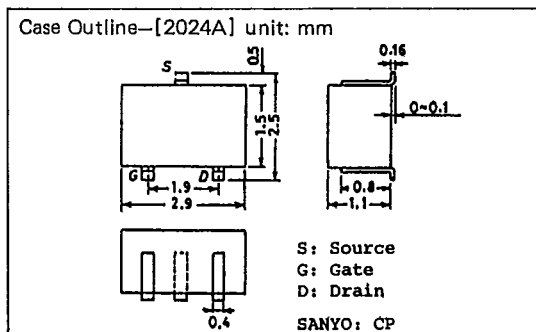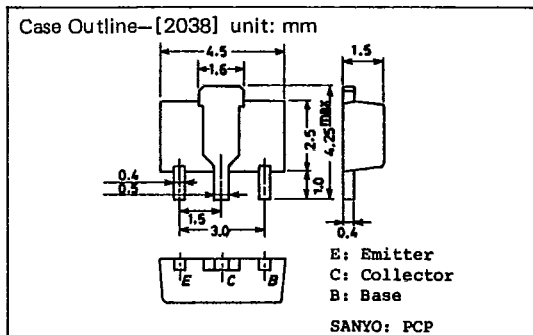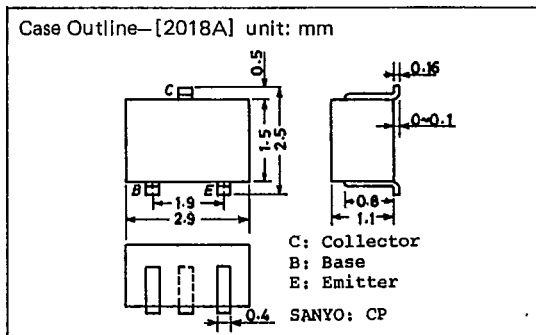


T-91-20

Case Outline—[2057] unit: mm

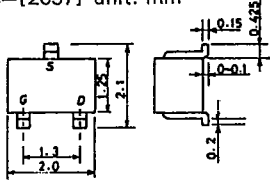


S: Source
G: Gate
D: Drain
SANYO: MCP

Case Outline—[2066] unit: mm

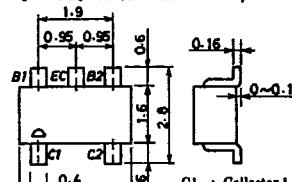


C1 : Collector 1
C2 : Collector 2
B2 : Base 2
EC : Emitter Common
B1 : Base 1
SANYO : CP6

Case Outline—[2058] unit: mm

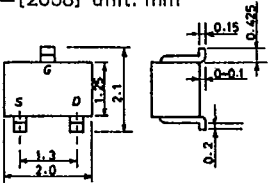


G: Gate
S: Source
D: Drain
SANYO: MCP

Case Outline—[2067] unit: mm

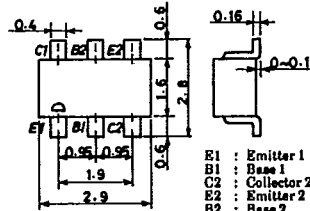


E1 : Emitter 1
B1 : Base 1
C2 : Collector 2
E2 : Emitter 2
B2 : Base 2
C1 : Collector 1
SANYO : CP6

Case Outline—[2059] unit: mm

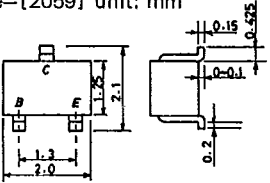


B: Base
C: Collector
E: Emitter
SANYO: MCP

Case Outline—[2068] unit: mm

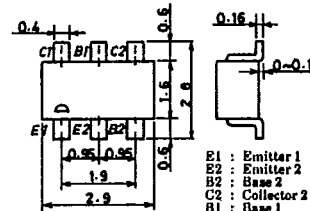


B1 : Emitter 1
E2 : Emitter 2
B2 : Base 2
C2 : Collector 2
B1 : Base 1
C1 : Collector 1
SANYO : CP6

Case Outline—[2062] unit: mm

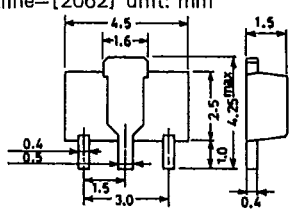


S: Source
D: Drain
G: Gate
SANYO: PCP

Case Outline—[2069] unit: mm

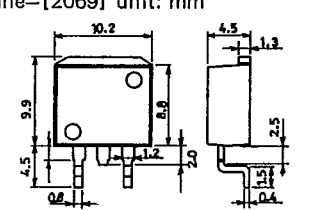


B: Base
C: Collector
E: Emitter
SANYO: SMP

Case Outline—[2065] unit: mm

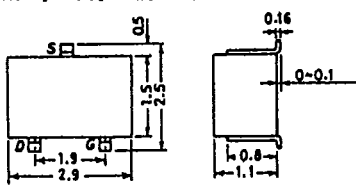

S: Source
D: Drain
G: Gate
SANYO: CP

Case Outline—[2070] unit: mm



G1 : Gate 1
G2 : Gate 2
D2 : Drain 2
SC : Source Common
D1 : Drain 1
SANYO : CP6

T-9120

