

## Features

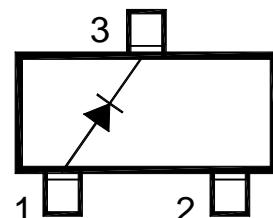
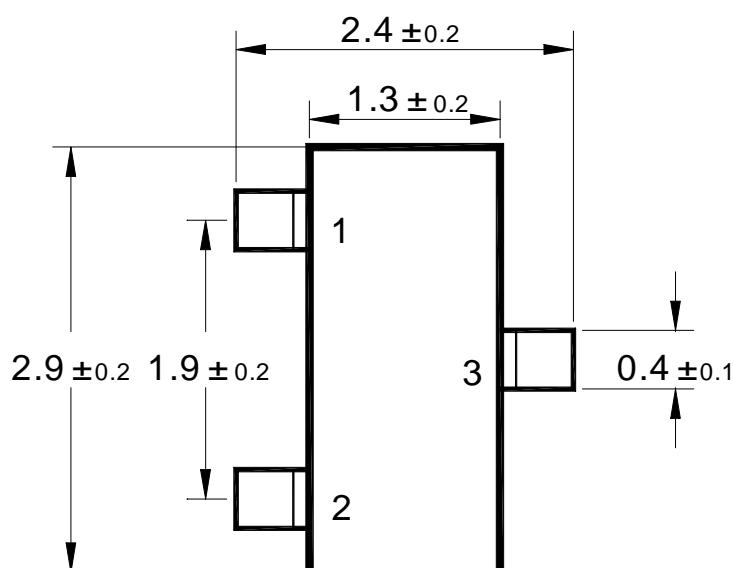
- Green colored transparency lens type
- Compact type
- Radiation size 1.3mm × 2.9mm
- Surface mount lead configuration

## Applications

- LCD backlighting
- Keypad backlighting
- Symbol backlighting
- Front panel indicator lamp

## Outline Dimensions

unit : mm



**PIN Connections**  
1.Anode  
2.Nc  
3.Cathode

**Absolute maximum ratings**

<b>Characteristic</b>	<b>Symbol</b>	<b>Ratings</b>	<b>Unit</b>
Power Dissipation	$P_D$	70	mW
Forward Current	$I_F$	25	mA
* <sup>1</sup> Peak Forward Current	$I_{FP}$	50	mA
Reverse Voltage	$V_R$	4	V
Operating Temperature	$T_{opr}$	-25 80	
Storage Temperature	$T_{stg}$	-30 100	
* <sup>2</sup> Soldering Temperature	$T_{sol}$	240 for 5 seconds	

\*1.Duty ratio = 1/16, Pulse width = 0.1ms

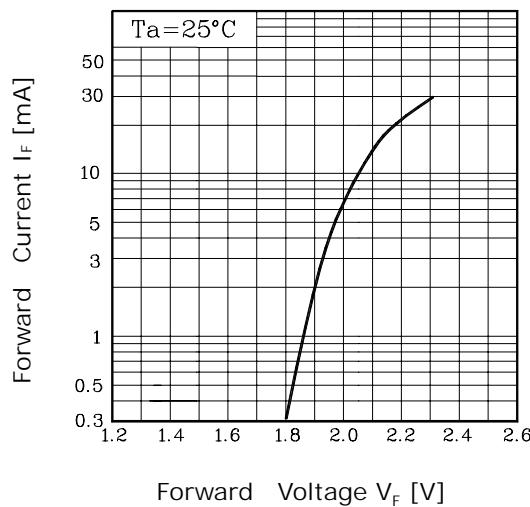
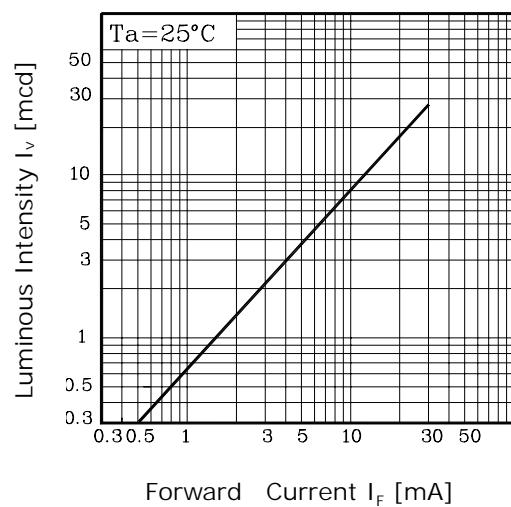
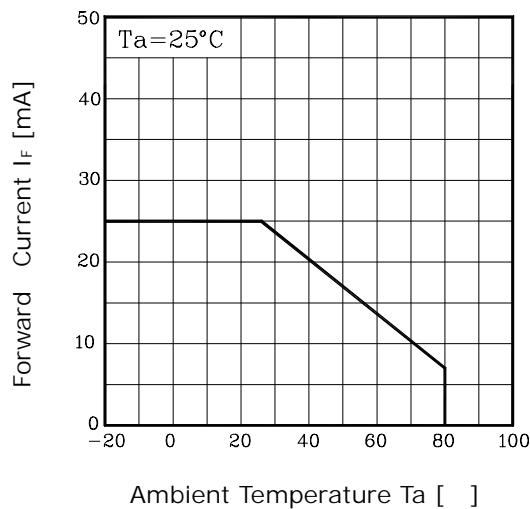
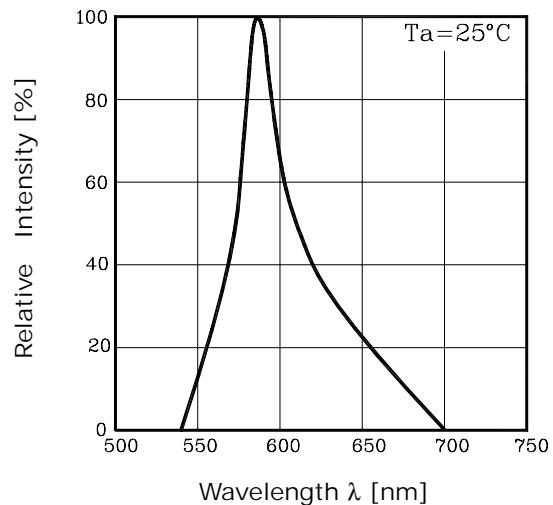
\*2.Recommended soldering condition ⇒ Attached

**Electrical Characteristics**

<b>Characteristic</b>	<b>Symbol</b>	<b>Test Condition</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Forward Voltage	$V_F$	$I_F = 20\text{mA}$	-	2.1	2.8	V
Luminous Intensity	$I_V$	$I_F = 20\text{mA}$	10	18	-	mcd
Peak Wavelength	$\lambda_P$	$I_F = 20\text{mA}$	-	570	-	nm
Spectrum Bandwidth		$I_F = 20\text{mA}$	-	30	-	nm
Reverse Current	$I_R$	$V_R = 4V$	-	-	10	uA
* <sup>3</sup> Half angle	$\theta_{1/2}$	$I_F = 20\text{mA}$	-	±55	-	deg

\*3.  $\theta_{1/2}$  is the off-axis angle where the luminous intensity is 1/2 the peak intensity

## Characteristic Diagrams

**Fig. 1  $I_F - V_F$** **Fig. 2  $I_V - I_F$** **Fig. 3  $I_F - T_a$** **Fig. 4 Spectrum Distribution****Fig. 5 Radiation Diagram**