

HA17L431/HA17L431A Series

High-Precision Variable Shunt Regulators

HITACHI


ADE-204-029D (Z)

Rev.4

Dec. 2000

Description

The HA17L431LP(MPAK-5) / P(TO-92) / UP(UPAK) and the HA17L431ALP(MPAK-5) / AP(TO-92) are temperature-compensated variable shunt regulators. These ICs can operate at about half voltage in comparison with HA17431V series. They can be replaced for simple Zener diode and they can also be used for switching power supply secondary-side error amplification circuit. MPAK-5, TO-92 and UPAK packages are available. The MPAK-5 package, in particular, is suitable for high-density mounting, with a mounting area approximately half that of Hitachi's UPAK products.

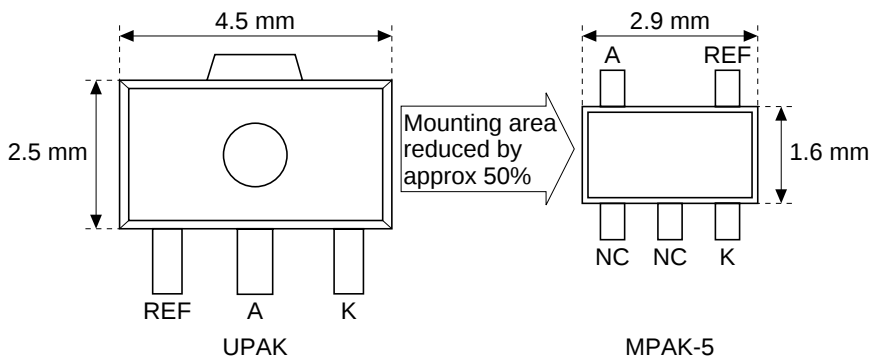

Features


- On-chip high-precision reference voltage source : $1.240\text{ V} \pm 1.0\%$ ($T_a = 25^\circ\text{C}$) [HA17L431A]
: $1.240\text{ V} \pm 1.5\%$ ($T_a = 25^\circ\text{C}$) [HA17L431]
- Small reference voltage temperature coefficient: $30\text{ ppm}/^\circ\text{C}$ Typ
- Maximum cathode voltage: 16 V
- Maximum cathode current: 50 mA
- Minimum cathode current: $200\text{ }\mu\text{A}$ Typ
- Operating temperature range: -20 to $+85^\circ\text{C}$

Application Example


- Reference voltage generation circuits, etc.

HA17L431/HA17L431A Series

Block Diagram

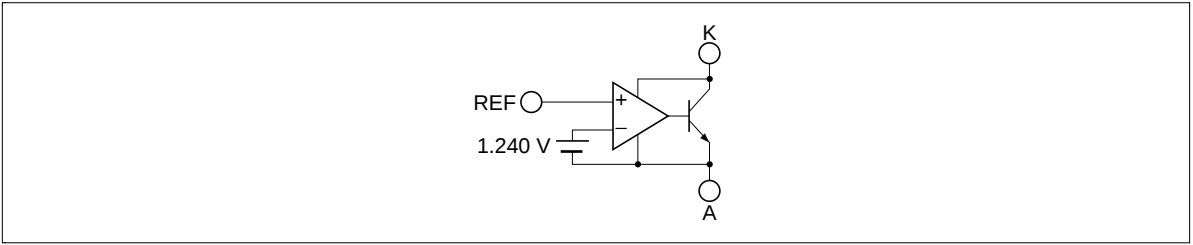


Application Circuit Example

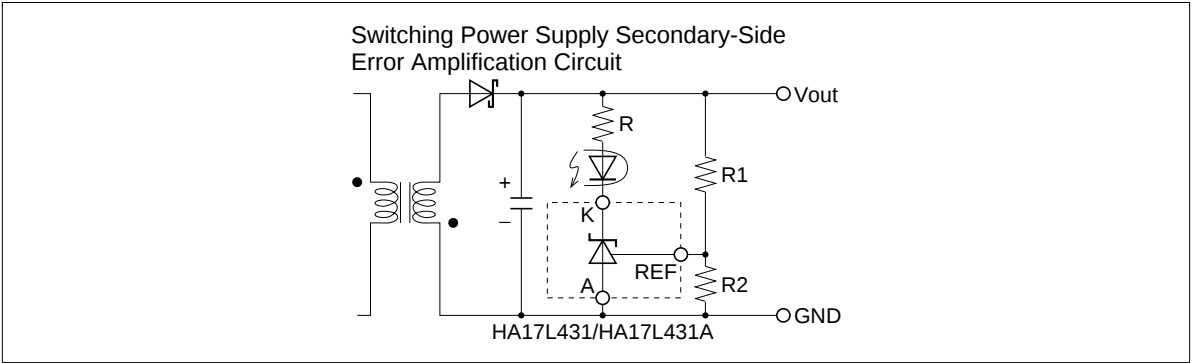

Product Lineup

Item		Reference Voltage		Package	Operating Temperature Range
		Normal Version	A Version		
		±1.5%	±1.0%		
		1.222 to 1.258 V	1.227 to 1.253 V		
		1.240V	1.240V		
Industrial use	HA17L431LP	O		MPAK-5	−20 to +85°C
	HA17L431ALP		O		
	HA17L431P	O		TO-92	
	HA17L431AP		O		
	HA17L431UP	O		UPAK	
	HA17L432UP	O			


Pin Arrangement

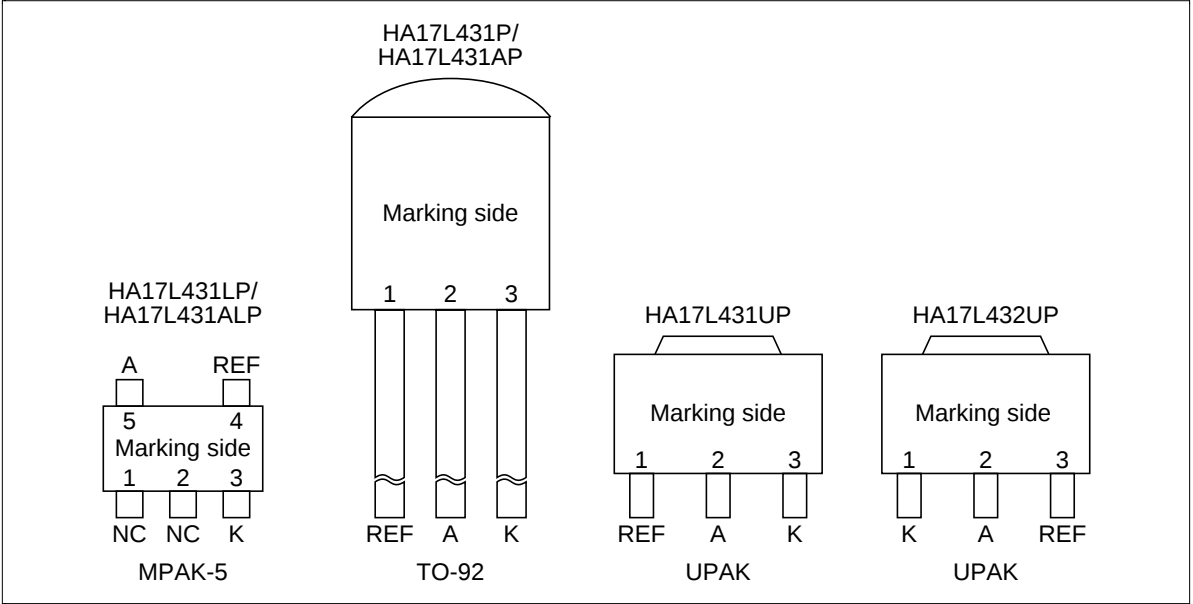

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rated Value			Unit	Note
		HA17L431LP/ HA17L431ALP	HA17L431P/ HA17L431AP	HA17L431UP/ HA17L432UP		
Cathode voltage	V _{KA}	16	16	16	V	1
Continuous cathode current	I _K	-30 to +50	-30 to +50	-30 to +50	mA	
Reference input current	I _{ref}	-0.05 to +5	-0.05 to +5	-0.05 to +5	mA	
Power dissipation	P _T	150	500	800	mW	2
Operating temperature	T _{opr}	-20 to +85	-20 to +85	-20 to +85	°C	
Storage temperature	T _{stg}	-55 to +150	-55 to +150	-55 to +150	°C	


Notes: 1. The anode pin is used as the reference for voltage values.
2. These values apply when Ta ≤ 25°C. If Ta ≥ 25°C, derate by below figure.

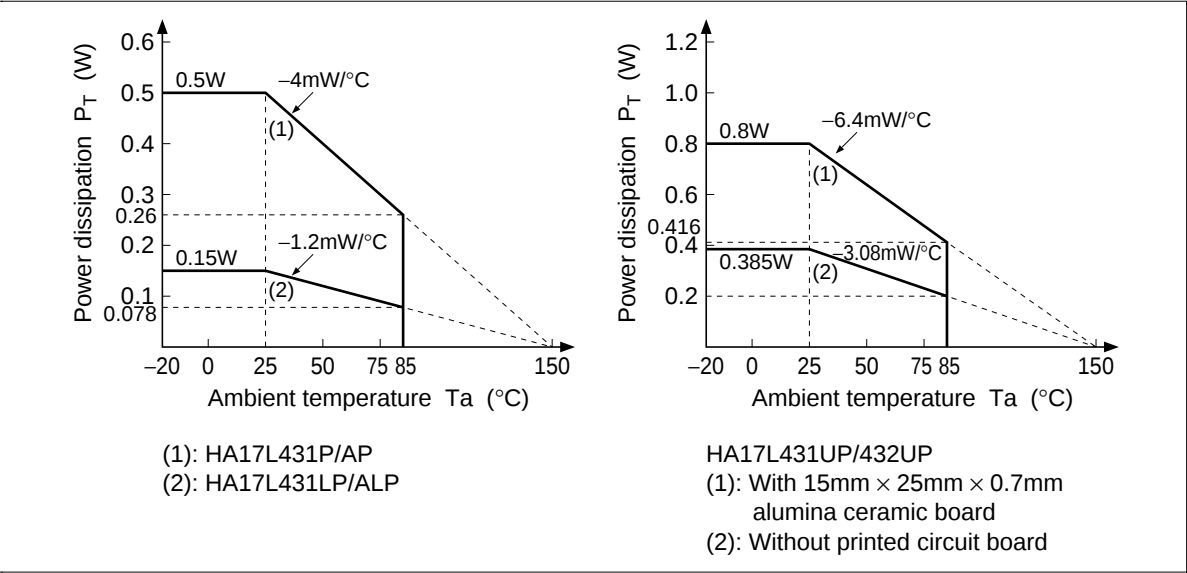

Electrical Characteristics (Ta = 25°C, I_K = 10 mA)

Item	Symbol	Min	Typ	Max	Unit	Test Condition	Remark
Reference voltage	V _{ref}	1.222	1.240	1.258	V	V _{KA} = V _{ref}	HA17L431
		1.227	1.240	1.253			HA17L431A
Reference voltage deviation	V _{ref} (dev)	—	5	—	mV	V _{KA} = V _{ref} , Ta = -20°C to +85°C	*1
Reference voltage temperature coefficient	ΔV _{ref} /ΔTa	—	±30	—	ppm/°C	V _{KA} = V _{ref} , 0°C to 50°C gradient	
Reference voltage regulation	ΔV _{ref} /ΔV _{KA}	—	1.0	2.0	mV/V	V _{KA} = V _{ref} to 16V	
Reference input current	I _{ref}	—	2	6	μA	R1 = 10 kΩ, R2 = ∞	
Reference current temperature deviation	I _{ref} (dev)	—	0.5	—	μA	R1 = 10 kΩ, R2 = ∞, Ta = -20°C to +85°C	
Minimum cathode current	I _{min}	—	0.2	1.0	mA	V _{KA} = V _{ref}	*2
Off cathode current	I _{off}	—	0.001	1.0	μA	V _{KA} = 16 V, V _{ref} = 0 V	
Dynamic impedance	Z _{KA}	—	0.2	0.5	Ω	V _{KA} = V _{ref} , I _K = 1 mA to 50 mA	

Notes: 1. V_{ref}(dev) = (V_{ref} maximum value at Ta = -20°C to +85°C) – (V_{ref} minimum value at Ta = -20°C to +85°C)

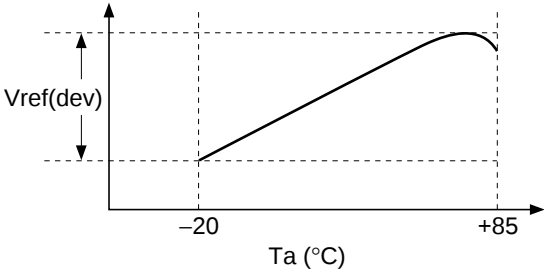


2. Definition of minimum cathode current.

I_{min} is the cathode current value at which V_{ref} = V_{ref}(I_K = 10 mA) – 15 mV.

HA17L431/HA17L431A Series

Marking Pattern on MPAK-5 Models (HA17L431LP/HA17L431ALP) and UPAK Models (HA17L431UP/HA17L432UP)

Because of the small package size, the following marking patterns are used on MPAK-5 and UPAK models. Note that the product code and marking pattern are different. The patterns are laser-marked.

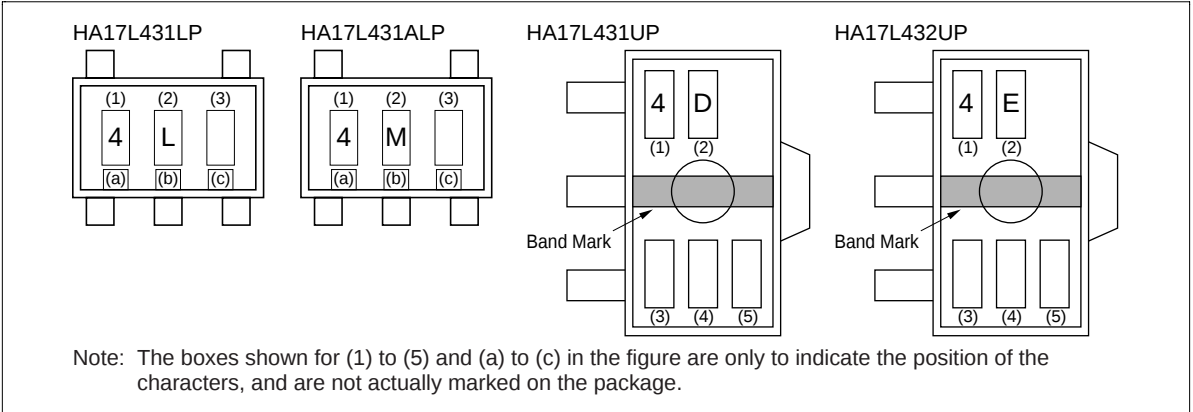

Markings

• HA17L431LP, HA17L431ALP

	Type of Marking	Meaning																																				
(1), (2)	Characters	Model code: 4L (HA17L431LP), 4M (HA17L431ALP)																																				
(3)		Production month code:																																				
		<table><tr><td>Production month</td><td>JAN</td><td>FEB</td><td>MAR</td><td>APR</td><td>MAY</td><td>JUN</td><td>JUL</td><td>AUG</td><td>SEP</td><td>OCT</td><td>NOV</td><td>DEC</td></tr><tr><td>Code</td><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td><td>H</td><td>J</td><td>K</td><td>L</td><td>M</td></tr></table>	Production month	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	Code	A	B	C	D	E	F	G	H	J	K	L	M										
Production month		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC																									
Code	A	B	C	D	E	F	G	H	J	K	L	M																										
(a), (b), (c)	Bar mark	Production year code: <table><tr><td>Production year</td><td>'98</td><td>'99</td><td>2000</td><td>2001</td><td>2002</td><td>2003</td><td>2004</td><td>2005</td></tr><tr><td>(a)</td><td>1</td><td>1</td><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td></tr><tr><td>(b)</td><td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1</td><td>1</td><td>0</td></tr><tr><td>(c)</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td><td>1</td><td>0</td></tr></table> Notes: 1. 1 indicates a bar, and 0 indicates no bar. 2. Repeated every 8 years from 2006 on.	Production year	'98	'99	2000	2001	2002	2003	2004	2005	(a)	1	1	1	0	0	0	0	1	(b)	0	1	1	0	0	1	1	0	(c)	1	0	1	0	1	0	1	0
Production year	'98	'99	2000	2001	2002	2003	2004	2005																														
(a)	1	1	1	0	0	0	0	1																														
(b)	0	1	1	0	0	1	1	0																														
(c)	1	0	1	0	1	0	1	0																														



• HA17L431UP, HA17L432UP

	Type of Marking	Meaning																										
(1), (2)	Characters	Model code: 4D (HA17L431UP), 4E (HA17L432UP)																										
(3)		Production year code: The last digit of the year.																										
(4)		Production month code: <table><tr><td>Production month</td><td>JAN</td><td>FEB</td><td>MAR</td><td>APR</td><td>MAY</td><td>JUN</td><td>JUL</td><td>AUG</td><td>SEP</td><td>OCT</td><td>NOV</td><td>DEC</td></tr><tr><td>Code</td><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td><td>H</td><td>J</td><td>K</td><td>L</td><td>M</td></tr></table>	Production month	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	Code	A	B	C	D	E	F	G	H	J	K	L	M
Production month		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC															
Code		A	B	C	D	E	F	G	H	J	K	L	M															
(5)		HITACHI management code																										


HITACHI

Characteristic Curves


Temperature Characteristics of Reference Voltage

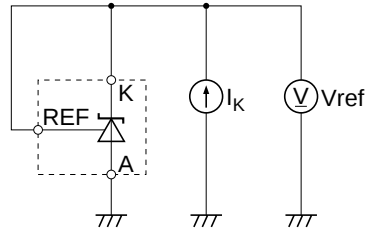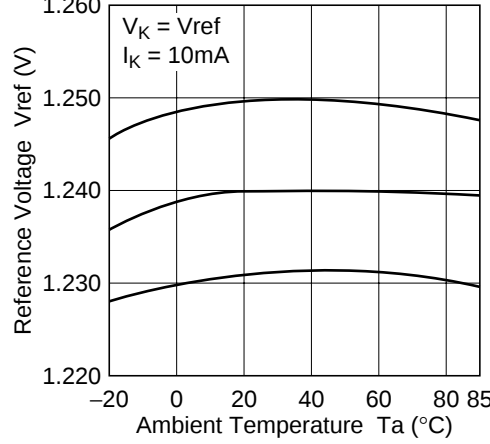



Catode Current vs. Catode Voltage1

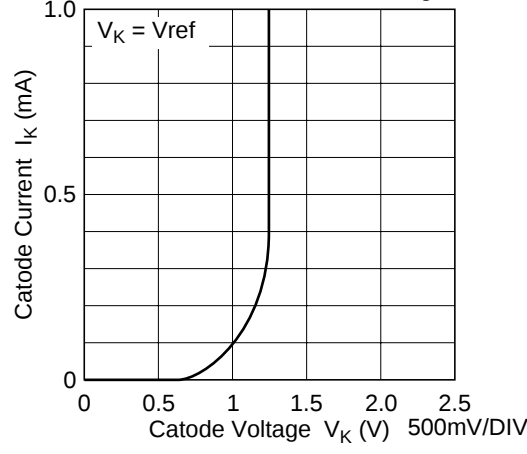

Catode Current vs. Catode Voltage2

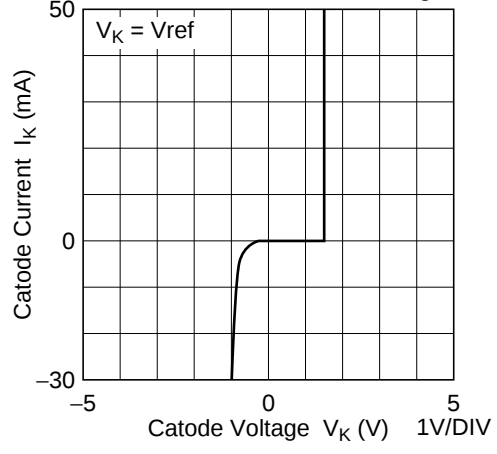



Open Loop Voltage Gain, Phase vs. Frequency Characteristics

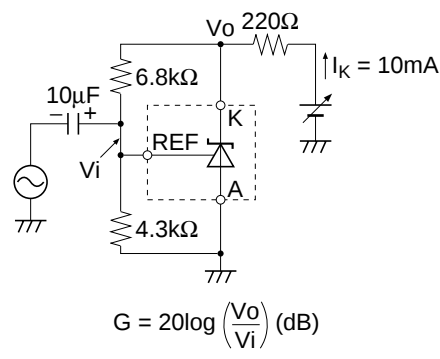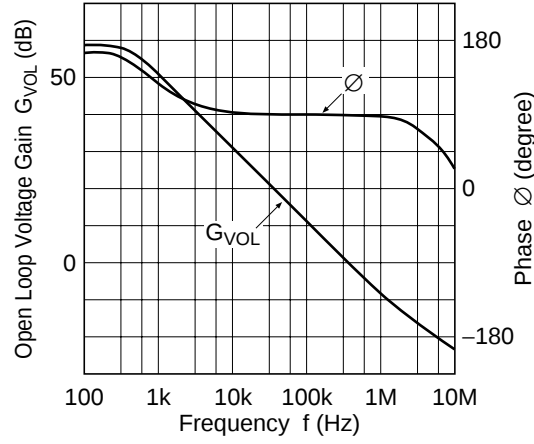

Package Dimension

- HA17L431LP
- HA17L431ALP



Unit: mm

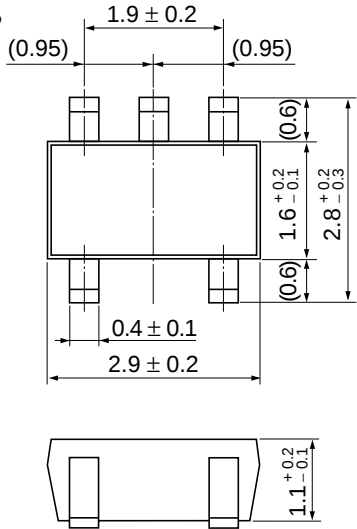

Hitachi Code	MPAK-5
JEDEC	—
EIAJ	—
Mass (reference value)	0.013 g

- HA17L431P
- HA17L431AP

Unit: mm

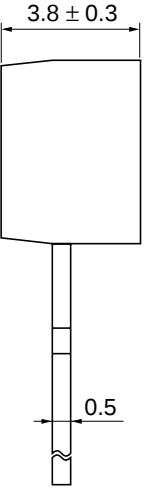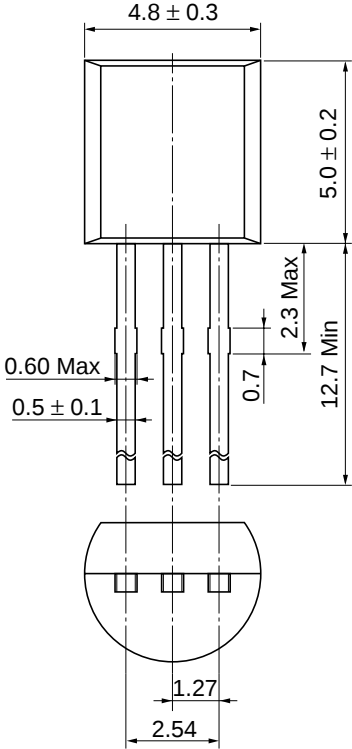


Hitachi Code	TO-92 (1)
JEDEC	Conforms
EIAJ	Conforms
Mass (reference value)	0.25 g

HA17L431/HA17L431A Series

- HA17L431UP
- HA17L432UP

Unit: mm

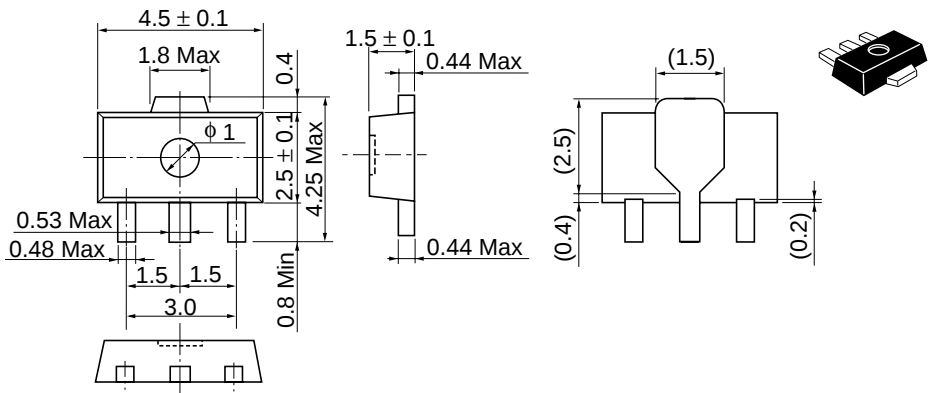








Hitachi Code	UPAK
JEDEC	—
EIAJ	Conforms
Weight (reference value)	0.050 g

Shunt Regulator Selection Guide

Package	Vref/Tolerance	I _k max (mA)	V _k max (V)	Topr (°C)	Product Name
TO-92	2.5 V ± 2.2%	–100 to +150	40	–20 to +85	HA17431PNA
	2.5 V ± 1.0%	–50 to +50	16	–20 to +85	HA17431VP
	1.24 V ± 1.5%	–30 to +50	16	–20 to +85	HA17L431P
	1.24 V ± 1.0%	–30 to +50	16	–20 to +85	HA17L431AP
TO-92MOD	2.5 V ± 2.2%	–100 to +150	40	–20 to +85	HA17431PA
UPAK	2.5 V ± 2.2%	–100 to +150	40	–20 to +85	HA17431UA
	2.5 V ± 2.2%	–100 to +150	40	–20 to +85	HA17431UPA
	1.24 V ± 1.5%	–30 to +50	16	–20 to +85	HA17L431UP
	2.5 V ± 2.2%	–100 to +150	40	–20 to +85	HA17432UA
	2.5 V ± 2.2%	–100 to +150	40	–20 to +85	HA17432UPA
	1.24 V ± 1.5%	–30 to +50	16	–20 to +85	HA17L432UP
MPAK-5	2.5 V ± 1.0%	–50 to +50	16	–20 to +85	HA17431VLP
	1.24 V ± 1.5%	–30 to +50	16	–20 to +85	HA17L431LP
	1.24 V ± 1.0%	–30 to +50	16	–20 to +85	HA17L431ALP
SOP-8	2.5 V ± 2.2%	–100 to +150	40	–20 to +85	HA17431FPA

HA17L431/HA17L431A Series

Pin Arrangement by Product

Product Name (Vref / Tolerance)	Package	Pin Arrangement
HA17431PA (2.5 V ± 2.2%)	TO-92MOD	
HA17431VP (2.5 V ± 1%) HA17431PNA (2.5 V ± 2.2%) HA17L431P (1.24 V ± 1.5%) HA17L431AP (1.24 V ± 1%)	TO-92	
HA17431UA (2.5 V ± 2.2%) HA17431UPA (2.5 V ± 2.2%) HA17L431UP (1.24 V ± 1.5%)	UPAK	
HA17432UA (2.5 V ± 2.2%) HA17432UPA (2.5 V ± 2.2%) HA17L432UP (1.24 V ± 1.5%)	UPAK	
HA17431VLP (2.5 V ± 1%)	MPAK-5	
HA17L431LP (1.24 V ± 1.5%) HA17L431ALP (1.24 V ± 1%)	MPAK-5	
HA17431FPA (2.5 V ± 2.2%)	SOP-8	

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	: http://semiconductor.hitachi.com/
	Europe	: http://www.hitachi-eu.com/hel/ecg
	Asia	: http://sicapac.hitachi-asia.com
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1>(408) 433-1990 Fax: <1>(408) 433-0223	Hitachi Europe GmbH Electronic Components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00
	Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 585160

Hitachi Asia Ltd. Hitachi Tower 16 Collyer Quay #20-00, Singapore 049318 Tel: <65>-538-6533/538-8577 Fax: <65>-538-6933/538-3877 URL: http://www.hitachi.com.sg	Hitachi Asia Ltd. (Taipei Branch Office) 4/F, No. 167, Tun Hwa North Road, Hung-Kuo Building, Taipei (105), Taiwan Tel: <886>-(2)-2718-3666 Fax: <886>-(2)-2718-8180 Telex: 23222 HAS-TP URL: http://www.hitachi.com.tw
---	---

Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower, World Finance Centre, Harbour City, Canton Road Tsim Sha Tsui, Kowloon, Hong Kong Tel: <852>-(2)-735-9218 Fax: <852>-(2)-730-0281 URL: http://www.hitachi.com.hk
--

Copyright © Hitachi, Ltd., 2000. All rights reserved. Printed in Japan.
Colophon 2.0

HITACHI