

SHINDENGEN

Schottky Rectifiers (SBD)

Single

D1FS4A

40V 1.5A


FEATURES

- Small SMT
- Tj150
- Low $V_F=0.45V$
- P_{RRSM} avalanche guaranteed

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

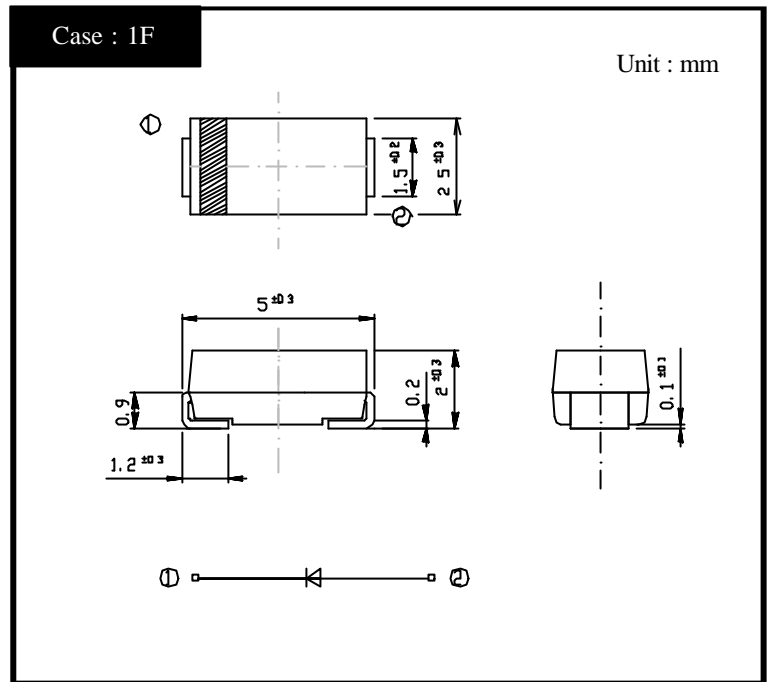

RATINGS

Absolute Maximum Ratings (If not specified Tl=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55 ~ 150	
Operating Junction Temperature	Tj		150	
Maximum Reverse Voltage	V_{RM}		40	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	I_o	50Hz sine wave, R-load Ta=28 On alumina substrate	1.5	A
		50Hz sine wave, R-load Ta=36 On glass-epoxy substrate	1.1	
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25	60	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μ s, Rating of per diode, Tj=25	160	W

Electrical Characteristics (If not specified Tl=25)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=1.1A$, Pulse measurement	Max.0.45	V
		$I_F=1.5A$, Pulse measurement	Max.0.48	
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.2	mA
Junction Capacitance	C_j	f=1MHz, $V_R=10V$	Typ.95	pF
Thermal Resistance	j	junction to lead	Max.23	/W
		junction to ambient On alumina substrate	Max.108	
		junction to ambient On glass-epoxy substrate	Max.157	

D1FS4A


Forward Voltage

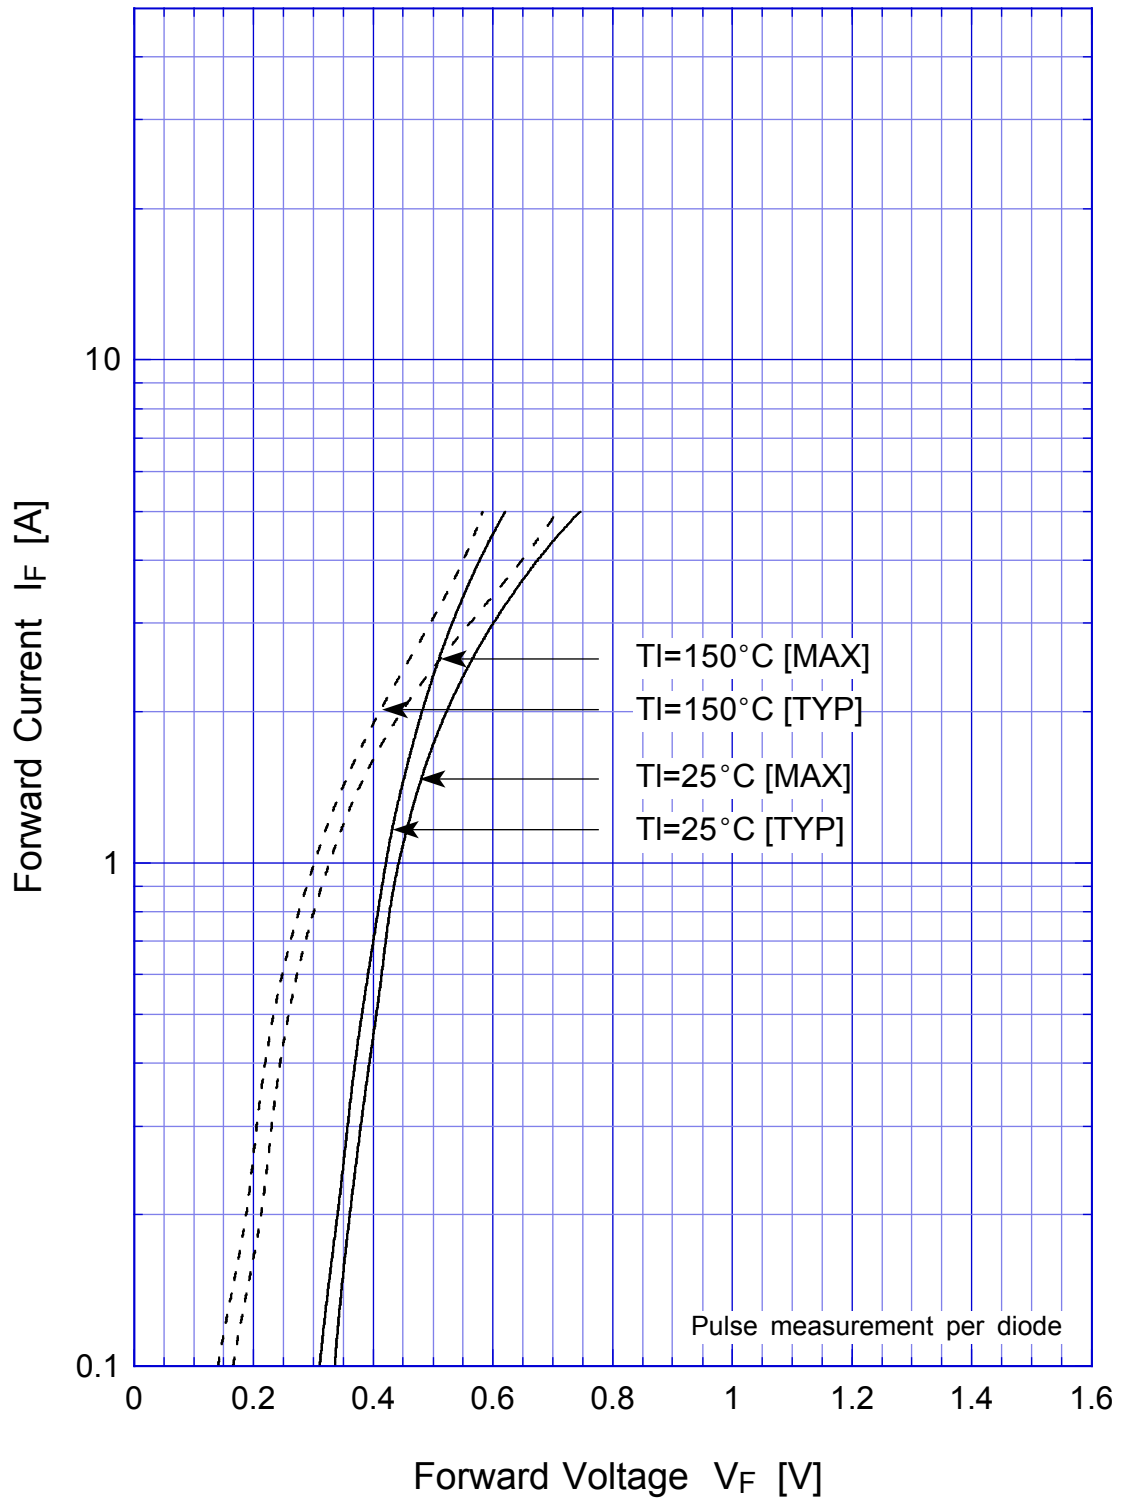


D1FS4A Junction Capacitance

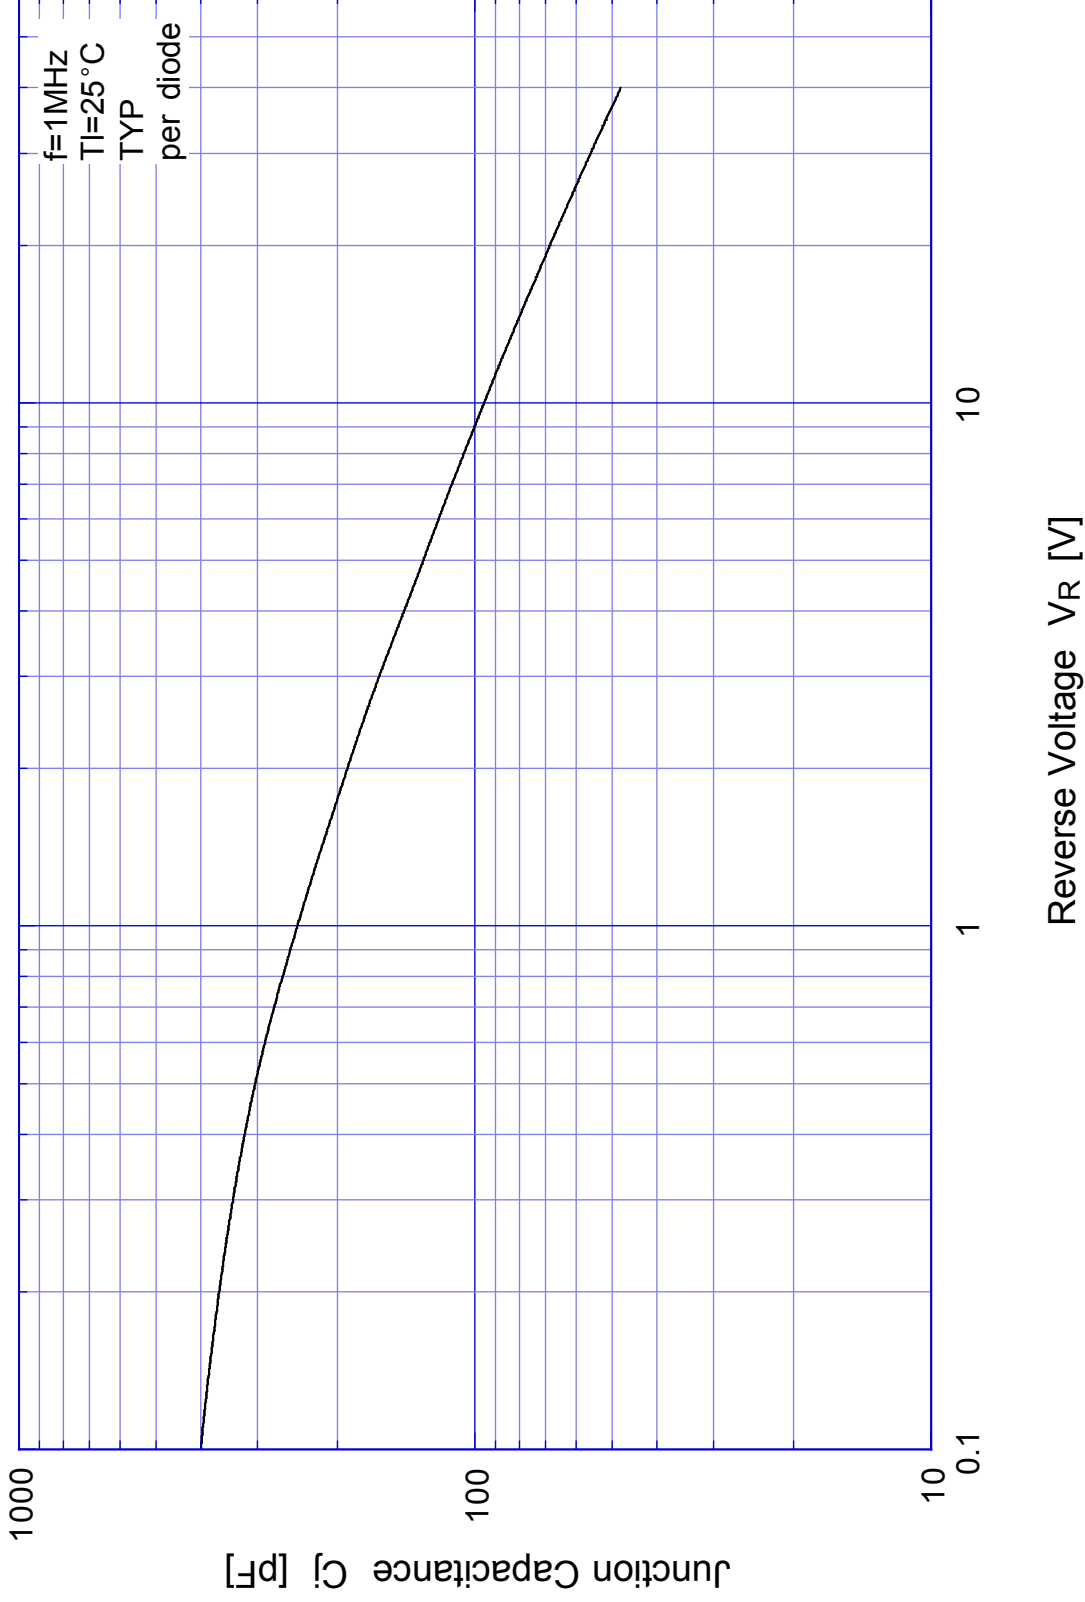


D1FS4A Reverse Power Dissipation

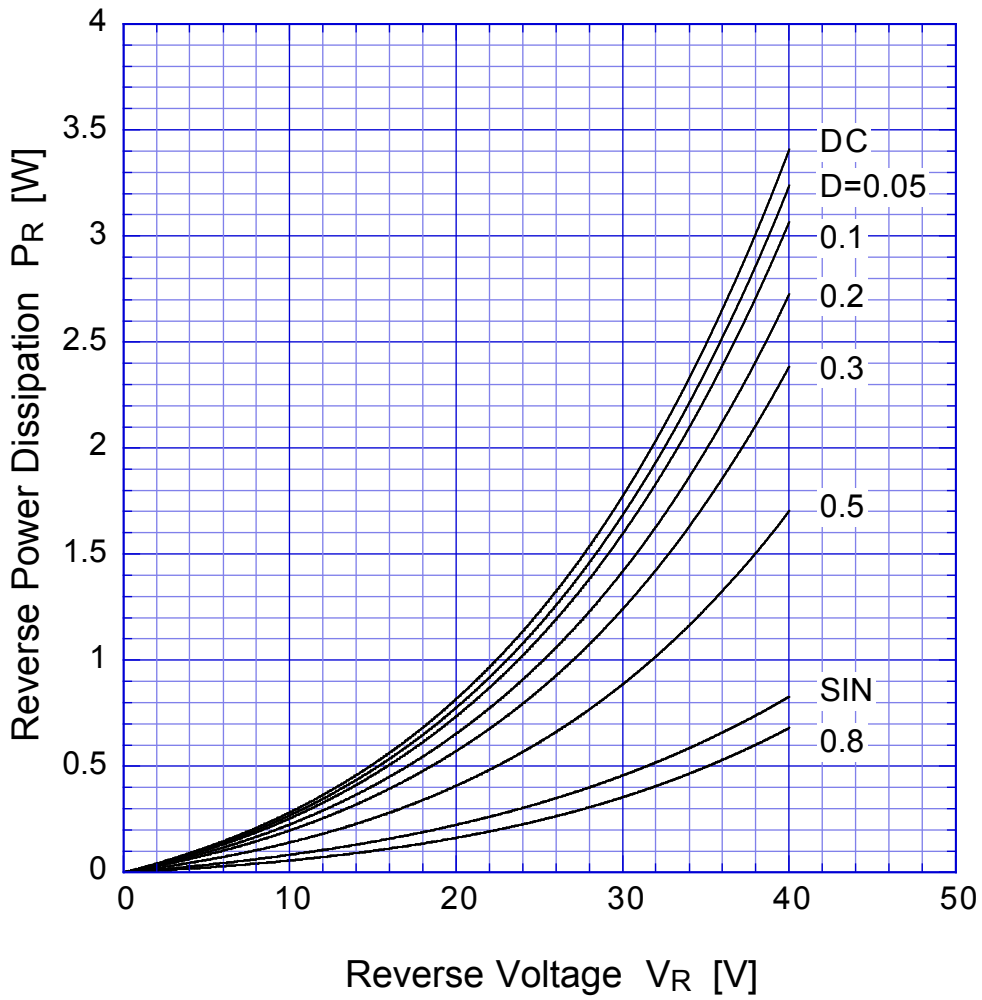


$T_j = 150^\circ\text{C}$

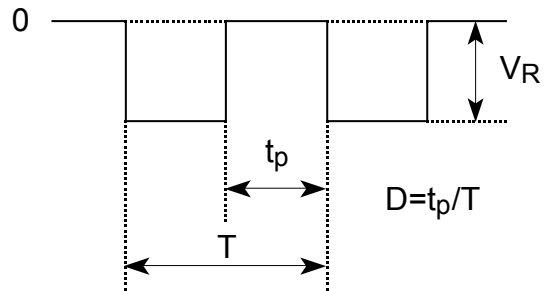

D1FS4A Forward Power Dissipation

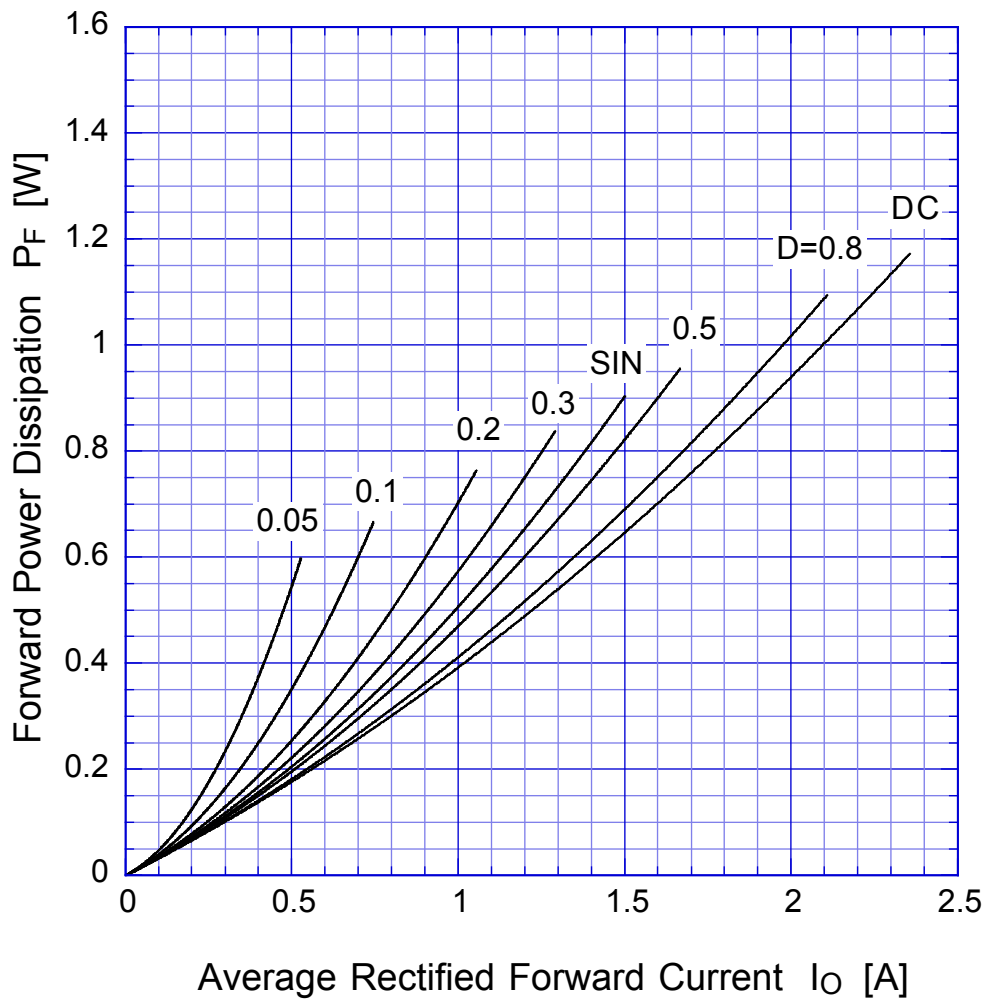


$T_j = 150^\circ\text{C}$

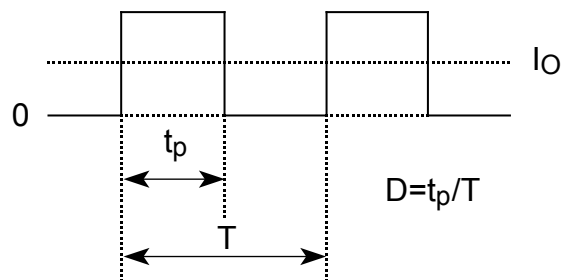


D1FS4A

Derating Curve

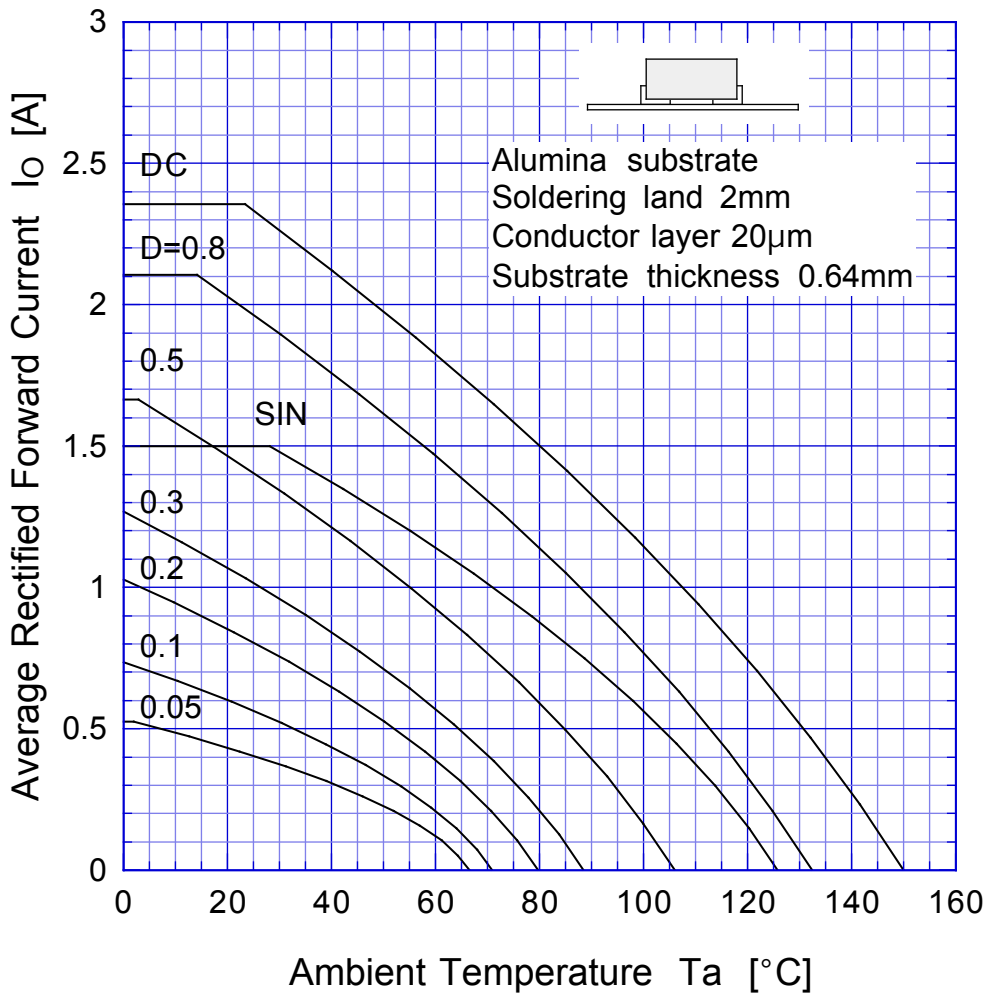


$V_R = 20V$

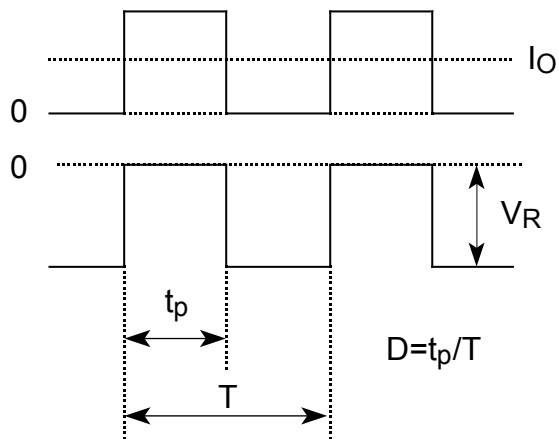

D1FS4A

Derating Curve

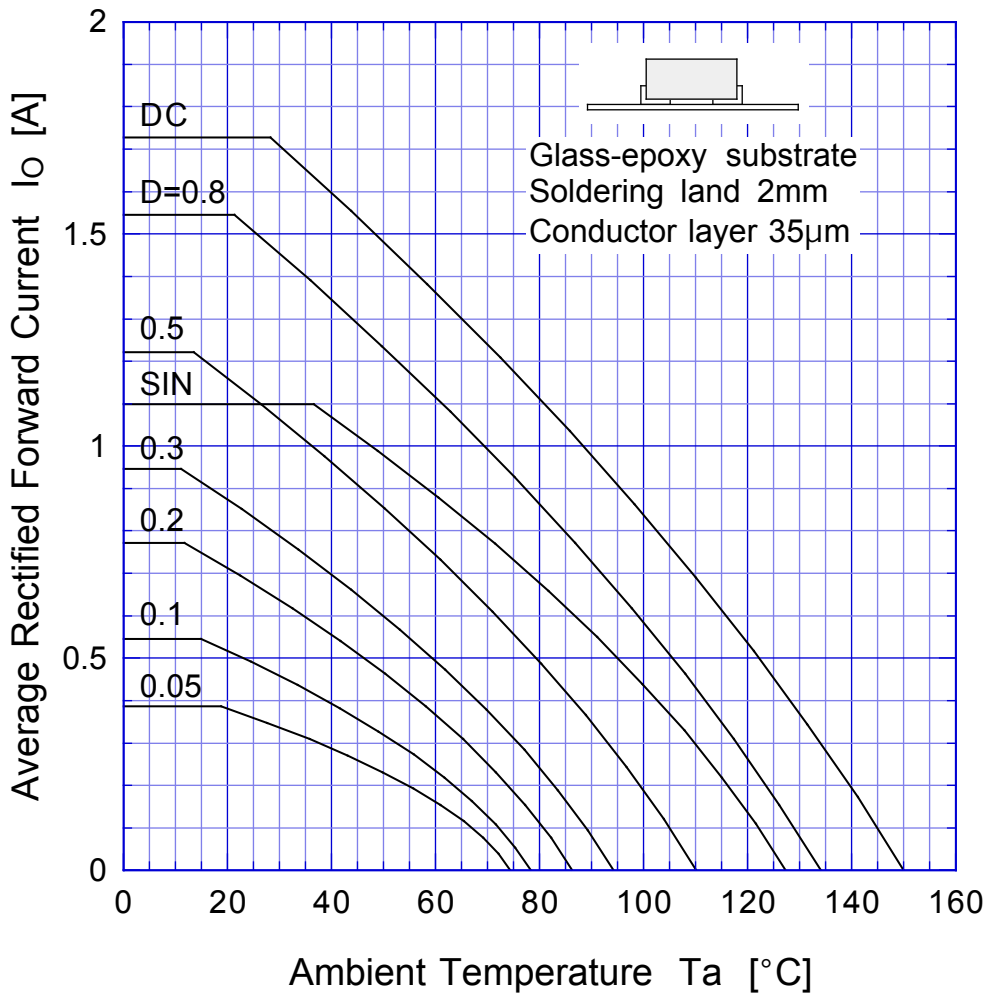


$V_R = 15V$



D1FS4A

Peak Surge Forward Capability

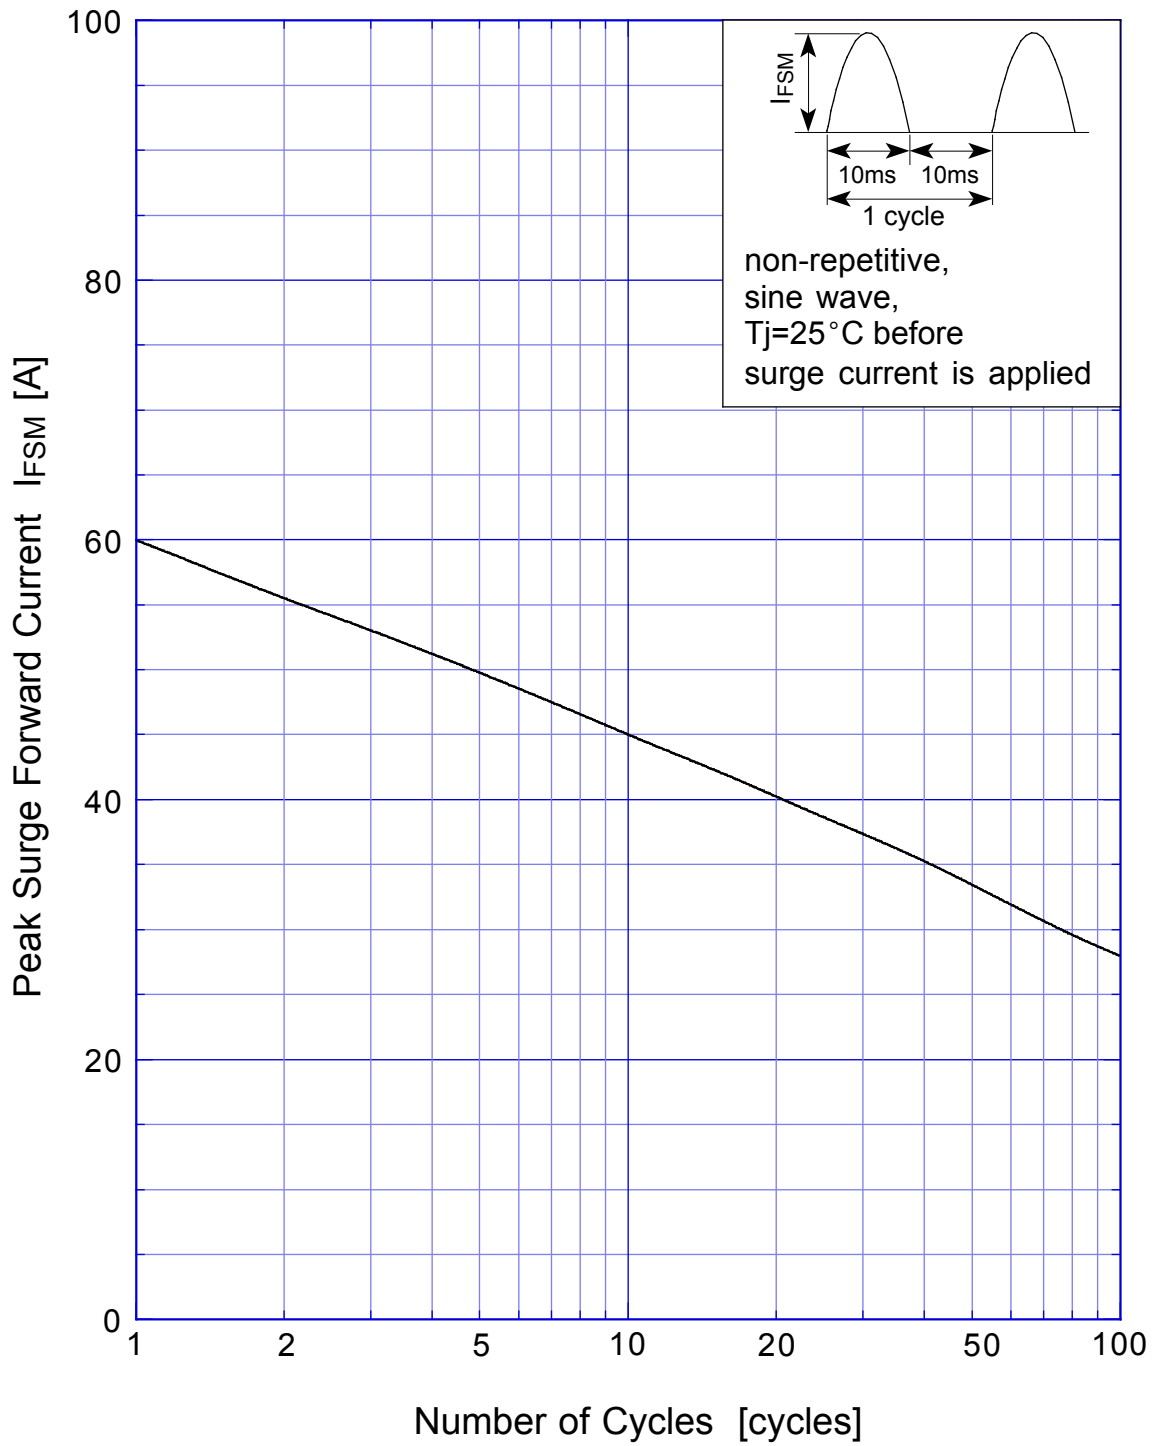

SBD Repetitive Surge Reverse Power Derating Curve



SBD

Repetitive Surge Reverse Power Capability

