

形 名	社 名	最 大 定 格						順方向特性		逆方向特性		Ct (pF)		測定条件		t r r (ns)		そ の 他 の 特 性 等	外 形
		VRRM	VR	IFM	Io, IFM	IFSM	P	IFmin	測定条件	IRmax	測定条件	typ	max	VR (V)	typ	max			
		(V)	(V)	(mA)	(mA)	(A)	(mW)	(mA)	VF (V)	(μA)	VR (V)								
* 1S1659	日電	10	7.5	150	50	0.4		6	0.6	0.1	4		1	0		1	VF<0.6V (IF=6mA) τ =20ps	7A	
* 1S1858	日電	10	10	90	30	0.18		50	1	5	10		0.8	0		1	NF<7.5dB (f=890MHz) τ =20ps 色表示 白, 白, 赤	50A	
* 1S1860	日電	3						25	0.5	0.2	1						τ =20ps 色表示 白, 白, 橙	7A	
* 1S1992	日電	30	30	60	20	0.12		30	1	0.2	10	0.8		0			τ =20ps 色表示 白, 白, 橙	7A	
* 1S1993	日電	20	20	100	30	0.2		50	1	0.2	10	0.9		0				7A	
* 1S1994	日電	30	30	100	30	0.2		50	1	0.2	10	0.9		0			τ =20ps 色表示 白, 白, 黄	7A	
* 1S1995	日電	20	20	150	50	0.3		70	1	0.2	10	0.9		0			τ =20ps 色表示 白, 白, 緑	7A	
* 1S2198	日電	5						25	0.5	30	0.5						NF<10.5dB (f=890MHz) X $\sim$ ノットデタタ 端子接続:A, K逆	7A	
* 1S2203	日電	4			75					100	4		0.4				Cc=0.2pF Ls=2μH 色表示 茶, 黒	50A	
* 1S2210	日電	11	10	60	20	0.12		20	1	0.1	5		1.2	0				87B	
* 1S2211	日電	33	30	100	35	0.2		35	1	0.3	15		1	0			Cc=0.2pF Ls=2μH 色表示 茶, 茶	87B	
* 1S512	日電	11	10	150	50*			50	1	10	10		0.7	0			NF=5.5dB (f=3060MHz) 色表示 赤	598B	
* 1S513	日電	4.2	4	90	30*			30	1	10	4		0.35	0			NF=6.5dB (f=9375MHz) 色表示 青	598B	
* 1S514	日電	3.3	3	75	25*			25	1	100	3		0.35	0.2			Bo>0.25V (f=10GHz) 色表示 青, 赤	598B	
* 1S515	日電	3.3	3	30	10*			10	1	100	3		0.22	0.2			Bo>0.2V (f=21GHz) 色表示 青, 橙	598B	
* 1S516	日電	5			30			30	0.5	25	0.5		0.9	0.2			NF=9.5dB (f=855MHz) 色表示 黒	7B	
* 1S523	日電	12	10	150	100*			50	1	10	10		1.2	0			τ =10ps	598D	
* 1S543	日電		5	90	30			10	0.55	1	5	0.55	0.8	5				7A	
* 1S569	日電	4	3	50	30			3	0.5	10	1	0.37		0.2			Tss=-55dBm (f=9375MHz)	48	
* 1S570	日電	4	3	90	30			1	0.5	1	1	0.35		0.2			NF<7dB (f=9375MHz)	48	
* 1S578	日電		5	90	30			15	0.5	10	0.5	0.4	0.6	0.2			NF<9.5dB (f=855MHz) 色表示 紫, 灰	7A	
* 1S586	日立		3		30			8	0.5	50	0.5		0.85	0.5				24C	
* 1S587	日立		3		15			3	0.5	10	2		0.85	0.5				24C	
* 1S588	日立		10		15			10	0.6	0.2	2		0.97	0			CATV $\sim$ ラシトミ $\sim$ 用, 4個組, ΔVF<10mV, ΔC<0.1pF	24C	
* 1S590	日立		5		30			45	0.5	25	0.5		0.9	0.2				88D	
* 1S597	日電		10		35		150	10	0.55	10	10		1	0				87B	
* 1S597 (1)	日電		10		35		150	35	1	0.1	5		1	0				87B	
* 1S597 (2)	日電		30		35		150	35	1	0.1	15		1	0				87B	
* 1S598	日電		5		50*		150	10	0.45	0.5	1		1	0				87B	
* 1S599	日電		5		30*		150	30	0.5	25	0.5		0.9	0.2				87B	
* 1S5101	日電		70		15		150	15	1	0.2	50		2	0				87B	
* 1S5106	日立		10		30			4.5	1	70	6	1	1.5	1			η >70% (f=40MHz)	24C	
* 1S5108	日立		30		15	0.2		3	1	100	10	1	3	1			η >70% (f=40MHz)	24C	
* 1S5124	日電	3			30			10	1	10	3	0.22	0.3	0			Tss=-55dBm (f=10GHz) X $\sim$ Ku $\sim$ ノットミ $\sim$ 色表示 赤	226	
* 1S5125	日電	22			50			100	1	10	20		1	0			Io=1.5mA (f=10GHz, Pi=10mW)	226	
* 1S5151	日立		3	100	30	0.2		35	0.5	50	0.5	0.9	1.2	0.5			NF<9dB (f=3GHz) Bo>2erg	24C	
* 1S5154	日立		6		30*			1	0.35	0.5	5	0.8		0			X $\sim$ Ku $\sim$ ノットデタタ 端子接続:A, K逆	6101	
* 1S5156	日電	3.5	3	15	10*			10	1	0.1	3		0.3	0			CATV $\sim$ ラシトミ $\sim$ 用, 4個組, ΔVF<10mV, ΔC<0.1pF	226	
* 1S5165	日立		10		15			10	0.6	10	10		1.0	0				79F	
* 1S5166	日立		10		15			10	0.6	10	10		1.2	0			ΔVF<10mV, ΔC<0.1pF	79H	
* 1S5174	日立		3	100	30	0.2		35	0.5	50	0.5	0.9	1.2	0.5				79F	
* 1S5198	日立		10		30			4.5	1	70	6		1.5	1			η >70% (f=40MHz)	79F	
* 1S5199	日立		30		15			3	1	100	10		3	1			η >70% (f=40MHz)	79F	
* 1S5228	日立		3		30			35	0.5	50	0.5		1.1	0.5				79H	
* 1S5237	日電	12	10		35*			35	1	0.1	5	0.8	1.0	0			NF<12.5dB (f=855MHz), Bo=2erg	79H	

図591

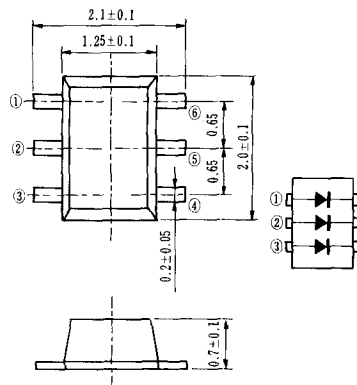


図592

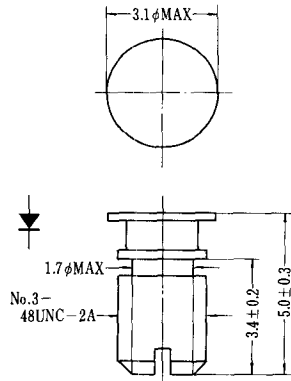


図593

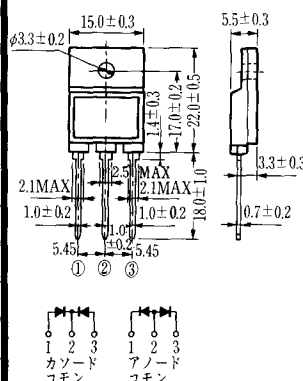


図594

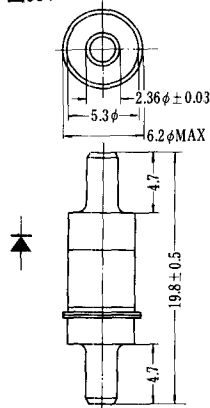


図595

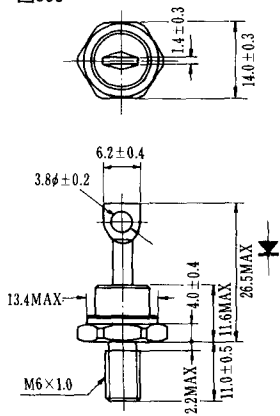


図596

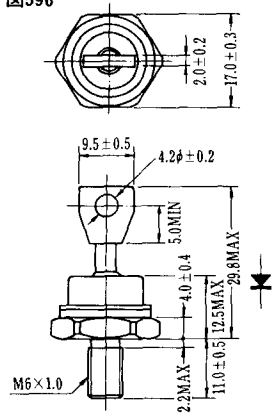


図597


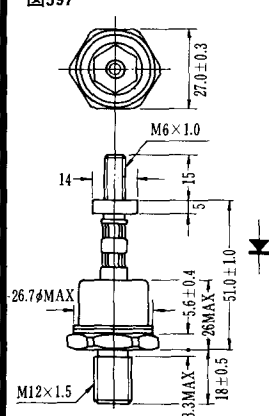


図598

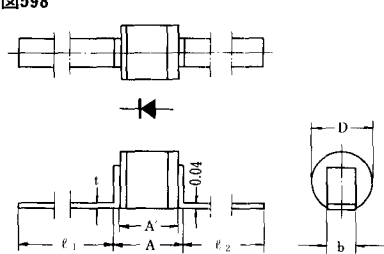

	A	A'	ϕD	b	t	r_1	r_2
598A	1.0MAX	0.69~0.15	1.27±0.06	0.5±0.1	0.08±0.02	5.0	5.0
598B	1.3MAX	1.3MAX	0.5	0.04	6±1	10±1	
598C	1.5MAX	1.7MAX	1.0	0.05	6±1	10±1	
598D	2.5MAX	1.7MAX	1.0	0.05	6±1	10±1	
598E	3.1MAX	2.6MAX	1.6MAX	0.7	0.06	3MIN	3MIN