

MA3J143, MA3J143A

Silicon epitaxial planar type


For switching circuits

■ Features

- Small S-mini type package contained two elements, allowing high-density mounting
- Two diodes are connected in series in the package

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Reverse current (DC)	V_R	40	V
		80	
Peak reverse voltage	V_{RM}	40	V
		80	
Forward current (DC)	I_F	100	mA
		65	
Peak forward current	I_{FM}	200	mA
		130	
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

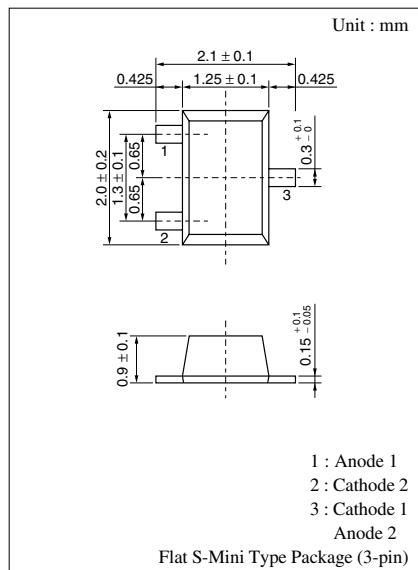


■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse current (DC)	I_R	$V_R = 40 \text{ V}$			100	nA
		$V_R = 80 \text{ V}$			100	
Forward voltage (DC)	V_F	$I_F = 100 \text{ mA}$			1.2	V
Reverse voltage (DC)	V_R	$I_R = 100 \mu\text{A}$	40			V
Terminal capacitance	C_{t1}^{*1}	$V_R = 0 \text{ V}, f = 1 \text{ MHz}$			5.5	pF
	C_{t2}^{*2}				3.0	pF
Reverse recovery time ^{*3}	t_{rr1}^{*1}	$I_F = 10 \text{ mA}, V_R = 6 \text{ V}$		150		ns
	t_{rr2}^{*2}	$I_{rr} = 0.1 \cdot I_R, R_L = 100 \Omega$		9		ns









Note) *1 : Between pins 2 and 3

*2 : Between pins 1 and 3

*3 : t_{rr} measuring circuit

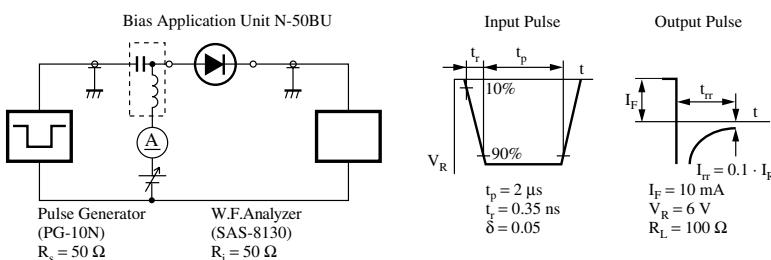

Characteristics charts of MA3J143

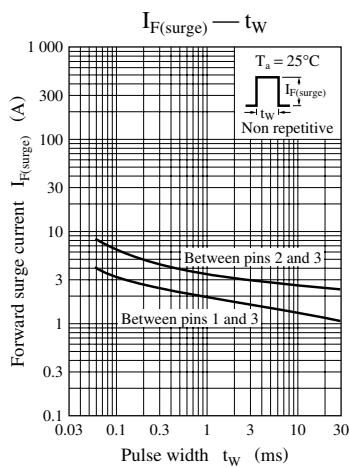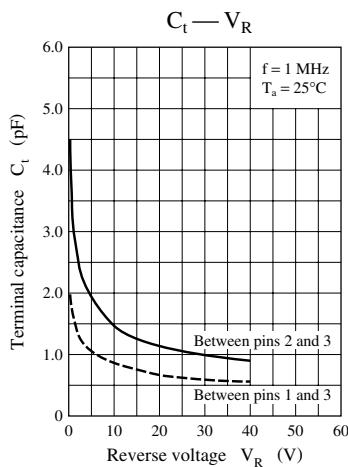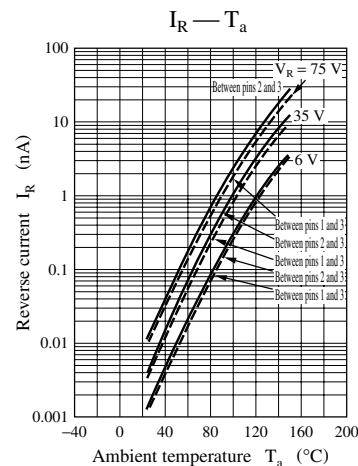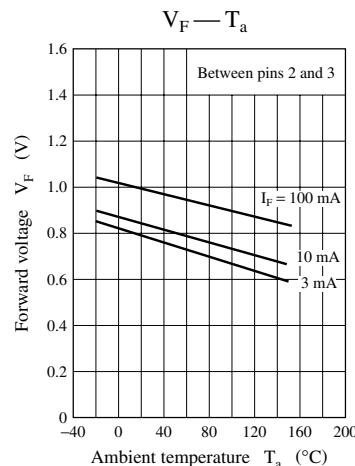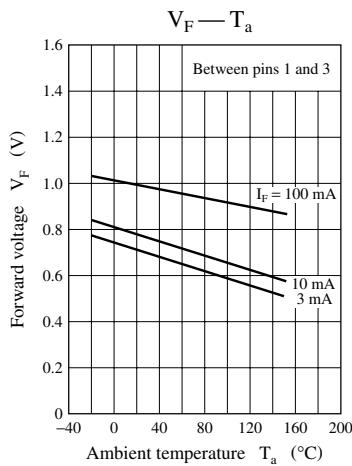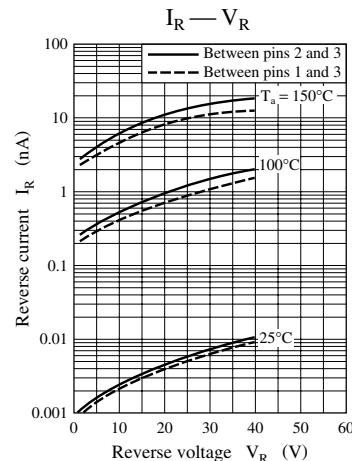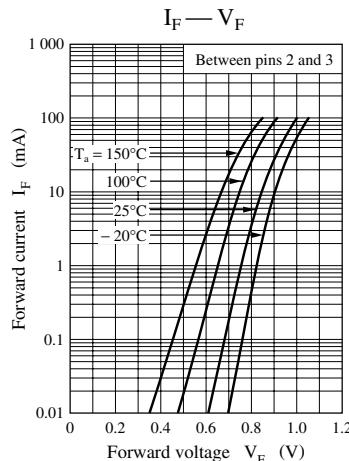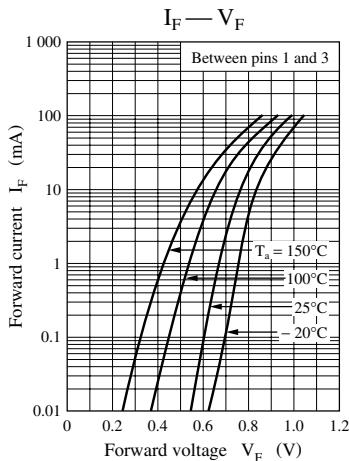

Characteristics charts of MA3J143A

