

MULTILAYER CERAMIC DIPLEXER

DESCRIPTION


TOKO's LTF2012D is a multilayer ceramic diplexer for dual band mobile communication systems. It has low passband loss in both high and low bands. TOKO's proprietary ceramic multilayer material and process is utilized for excellent performance and exceptional reliability. Specific parts have been designed for common dual band systems, such as AMPS-PCS and GSM-DCS.



FEATURES

- Miniature footprint: 2.0 x 1.2mm
- Low profile: 1.0mm max.
- Integrated ceramic structure
- Operating temperature: - 55°C to + 125°C
- Reflow solderable

DIMENSIONS

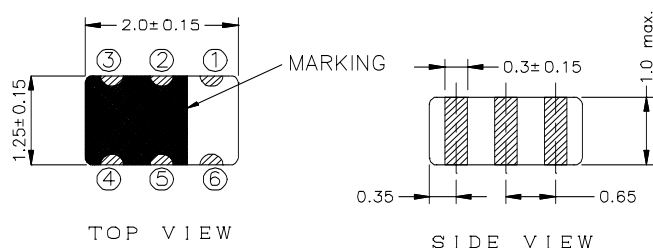

3	GND	2	IN	1	GND
4	OUT2	5	GND	6	OUT1

Units: mm


ELECTRICAL SPECIFICATIONS

TOKO Part Number	LTF2012D-F17S		LTF2012D-F25S	
	OUT1 (AMPS)	OUT2 (PCS)	OUT1 (GSM)	OUT2 (DCS)
Frequency Range	824-894 MHz	1850-1990 MHz	880-960 MHz	1710-1880 MHz
Attenuation @ Low Band (dB)	0.45 max.	19.0 min.	0.5 max.	20.0 min.
Attenuation @ High Band (dB)	20.0 min.	0.5 max.	16.0 min.	0.55 max.
Passband Return Loss (dB)	12.0 min.	12.0 min.	12.0 min.	12.0 min.
Impedance	50 Ω	50 Ω	50 Ω	50 Ω


TYPICAL CHARACTERISTICS

LTF2012D-F17S

Attenuation at AMPS

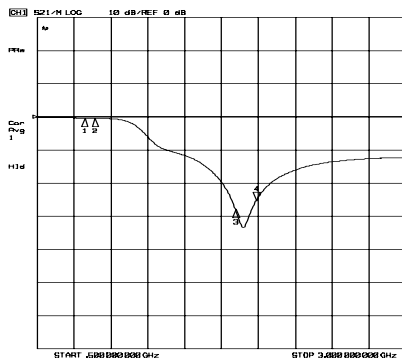


Attenuation at PCS

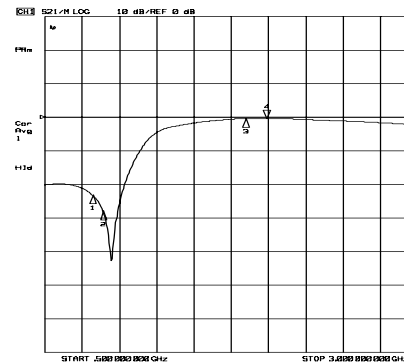


LTF2012D-F25S

Attenuation at EGSM

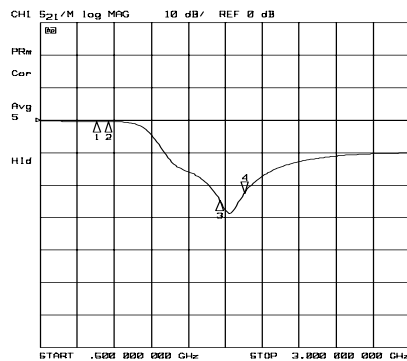

Attenuation at DCS

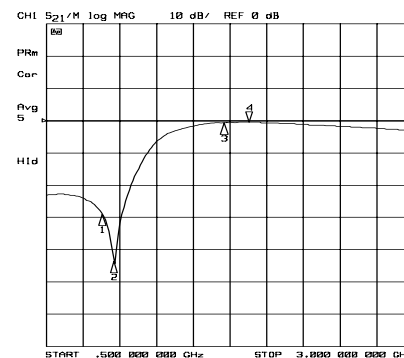

The information furnished by TOKO, Inc., is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification, or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.