

NCP582

Ultra-Fast, Low Noise 150 mA CMOS LDO Regulator with Enable

The NCP582 series of low dropout regulators are designed for portable battery powered applications which require precise output voltage accuracy, low quiescent current, and high ripple rejection. These devices feature an enable function and are offered in active low and active high with auto discharge.

The following ceramic capacitors are the recommended values to be used with these devices; for $V_{out} < 2.5$ V, $C_{in} = C_{out} = 1.0 \mu F$, $V_{out} \geq 2.5$ V, $C_{in} = C_{out} = 0.47 \mu F$.

Features

- Ultra-Low Dropout Voltage of 220 mV at 150 mA
- Low Output Noise of 30 μV_{rms} without Noise Reduction Cap
- Excellent Line Regulation of 0.02%/V
- Excellent Load Regulation of 22 mV
- High Output Voltage Accuracy of $\pm 2\%$
- Low I_q Current of 75 μA
- Very Low Shutdown Current
- Excellent Power Supply Rejection Ratio of 70 dB at $f = 1.0$ kHz
- Wide Output Voltage Range of 1.5 V to 3.3 V
- Fast Dynamic Performance
- Fold Back Protection Circuit
- Low Temperature Drift Coefficient on the Output Voltage of ± 100 ppm/ $^{\circ}C$
- Input Voltage up to 6.5 V
- These are Pb-Free Devices

Typical Applications

- Portable Equipment
- Hand-Held Instrumentation
- Camcorders and Cameras

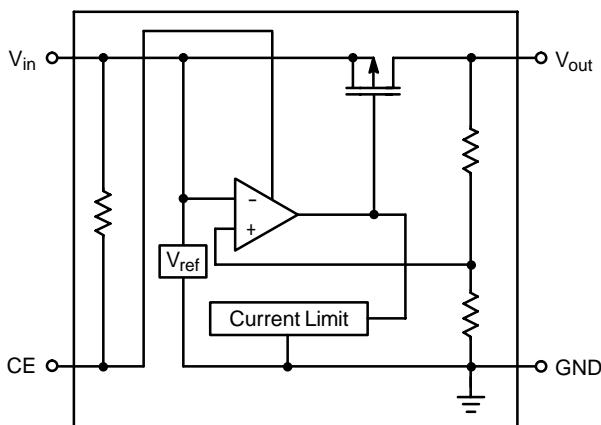


Figure 1. Simplified Block Diagram
for Active Low

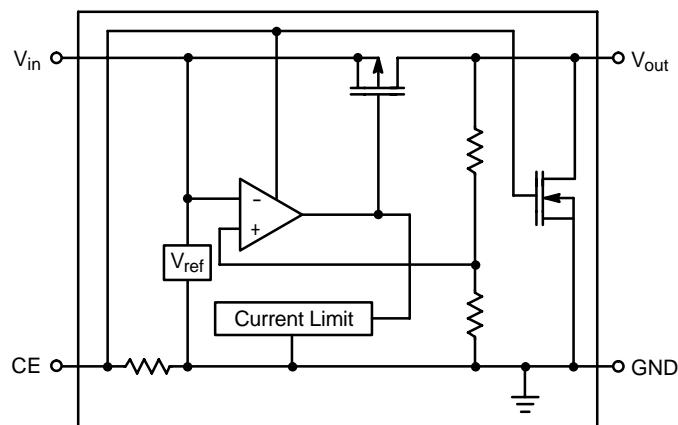



Figure 2. Simplified Block Diagram
for Active High with Auto Discharge




ON Semiconductor®

<http://onsemi.com>


MARKING DIAGRAMS



SC-82AB
SQ SUFFIX
CASE 419C



SOT-563
XV SUFFIX
CASE 463A



xxx = Device Code

M = Date Code*

▪ = Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation and/or position may vary depending upon manufacturing location.

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 11 of this data sheet.

NCP582

PIN FUNCTION DESCRIPTION

| SOT-563 Pin | SC-82AB Pin | Symbol | Description |
|-------------|-------------|-----------------------|-----------------------------|
| 1 | 4 | V_{in} | Power supply input voltage. |
| 2 | 2 | GND | Power supply ground. |
| 3 | 3 | V_{out} | Regulated output voltage. |
| 4 | - | NC | No connect. |
| 5 | - | GND | Power supply ground. |
| 6 | 1 | \overline{CE} or CE | Chip enable pin. |

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|--|-----------|-----------------------|------|
| Input Voltage | V_{in} | 6.5 | V |
| Input Voltage (\overline{CE} or CE Pin) | V_{CE} | -0.3 to V_{in} +0.3 | V |
| Output Voltage | V_{out} | -0.3 to V_{in} +0.3 | V |
| Output Current | I_{out} | 200 | mA |
| Power Dissipation SC-82AB SOT-563 | P_D | 150 500 | mW |
| Operating Junction Temperature Range | T_J | -40 to +85 | °C |
| Storage Temperature Range | T_{stg} | +150 | °C |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

NCP582

ELECTRICAL CHARACTERISTICS ($V_{in} = V_{out} + 1.0\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|----------------------------------|------------------------|------------------------------|------------------------------|----------------------------|
| Input Voltage | V_{in} | 2.0 | — | 6.0 | V |
| Output Voltage ($I_{out} = 1.0\text{ mA}$ to 30 mA) | V_{out} | $V_{out} \times 0.980$ | — | $V_{out} \times 1.020$ | V |
| Line Regulation ($I_{out} = 30\text{ mA}$) ($V_{out} > 1.7\text{ V}$; $V_{out} + 0.5\text{ V} \leq V_{in} \leq 6.0\text{ V}$) ($V_{out} = 1.5\text{ V}$; $2.2\text{ V} \leq V_{in} \leq 6.0\text{ V}$) | Reg _{line} | — | 0.02 | 0.10 | %/V |
| Load Regulation ($I_{out} = 1.0\text{ mA}$ to 150 mA) | Reg _{load} | — | 22 | 40 | mV |
| Dropout Voltage ($I_{out} = 150\text{ mA}$) $V_{out} = 1.5\text{ V}$ $V_{out} = 1.8\text{ V}$ $V_{out} = 2.5\text{ V}$ $2.8\text{ V} \leq V_{out} \leq 3.3\text{ V}$ | V_{DO} | — — — — | 0.38 0.32 0.28 0.22 | 0.70 0.55 0.50 0.35 | V |
| Quiescent Current ($I_{out} = 0\text{ mA}$) | I_q | — | 75 | 95 | μA |
| Output Current | I_{out} | 150 | — | — | mA |
| Shutdown Current ($V_{CE} = \text{Gnd}$ for Active High with Auto Discharge) ($V_{CE} = V_{in}$ for Active Low) | I_{SD} | — | 0.1 | 1.0 | μA |
| Output Short Circuit Current ($V_{out} = 0$) | I_{lim} | — | 40 | — | mA |
| Ripple Rejection ($I_{out} = 30\text{ mA}$) ($V_{out} > 1.7\text{ V}$; $V_{in} - V_{out} = 1.0\text{ V}$) ($V_{out} = 1.5\text{ V}$; $V_{in} - V_{out} = 1.2\text{ V}$) $f = 1.0\text{ kHz}$ $f = 10\text{ kHz}$ | RR | — — | 70 60 | — — | dB |
| Enable Input Threshold Voltage High Low | $V_{th_{enh}}$ $V_{th_{enl}}$ | 1.5 0 | — — | V_{in} 0.3 | V |
| Output Noise Voltage (Bandwidth = 10 Hz to 100 kHz) | V_n | — | 30 | — | μVRms |
| Output Voltage Temperature Coefficient ($I_{out} = 30\text{ mA}$, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$) | $\Delta V_{out}/\Delta T$ | — | ± 100 | — | ppm°C |
| N-Channel On Resistance for Auto Discharge | R_{Low} | — | 60 | — | Ω |

TYPICAL CHARACTERISTICS

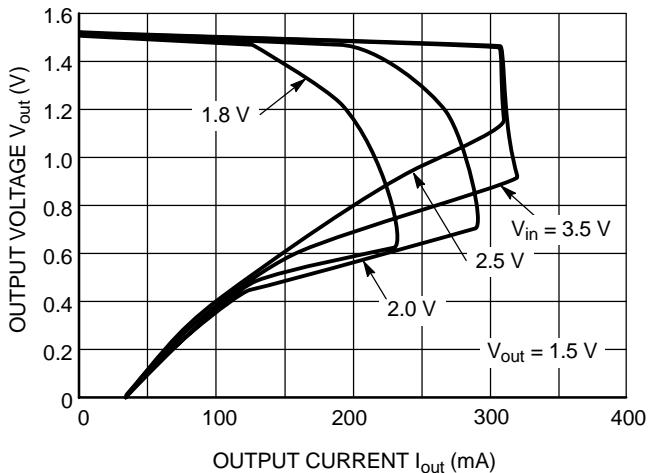


Figure 3. Output Voltage vs. Output Current

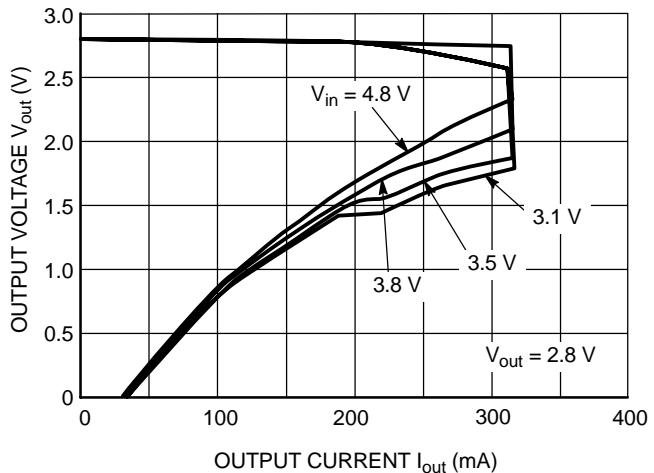


Figure 4. Output Voltage vs. Output Current

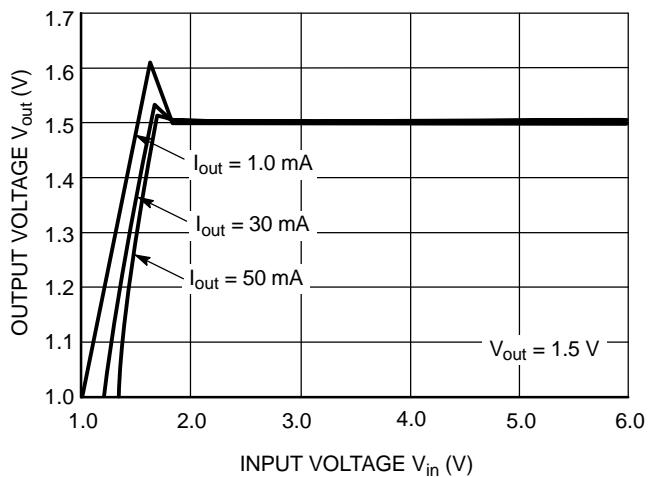


Figure 5. Output Voltage vs. Input Voltage

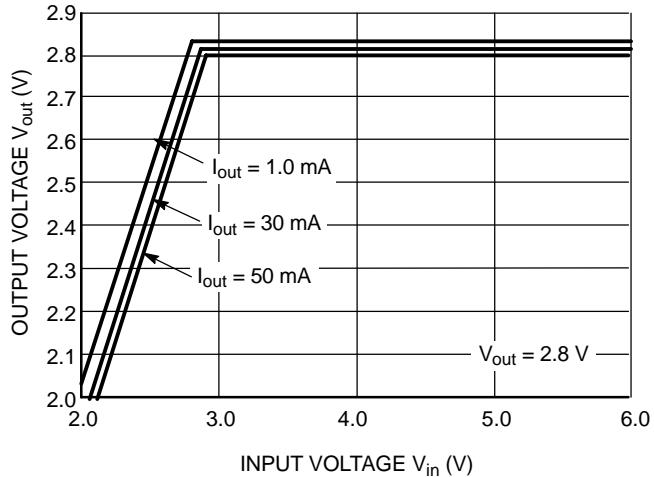


Figure 6. Output Voltage vs. Input Voltage

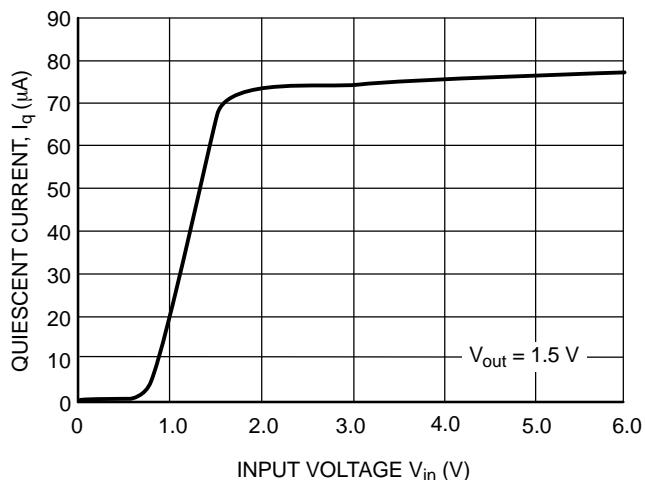


Figure 7. Quiescent Current vs. Input Voltage







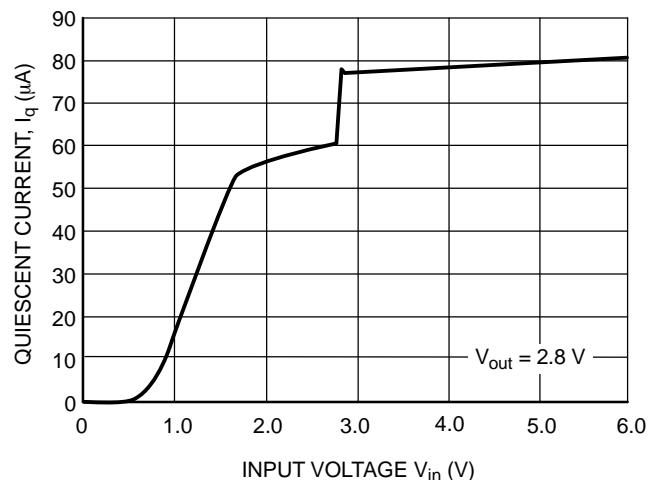


Figure 8. Quiescent Current vs. Input Voltage

TYPICAL CHARACTERISTICS

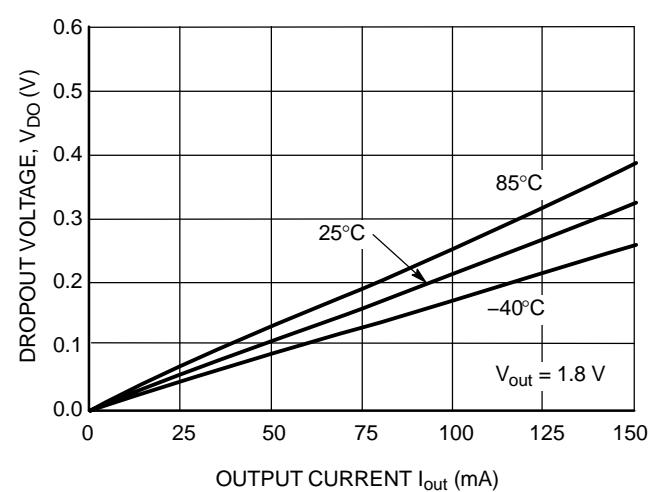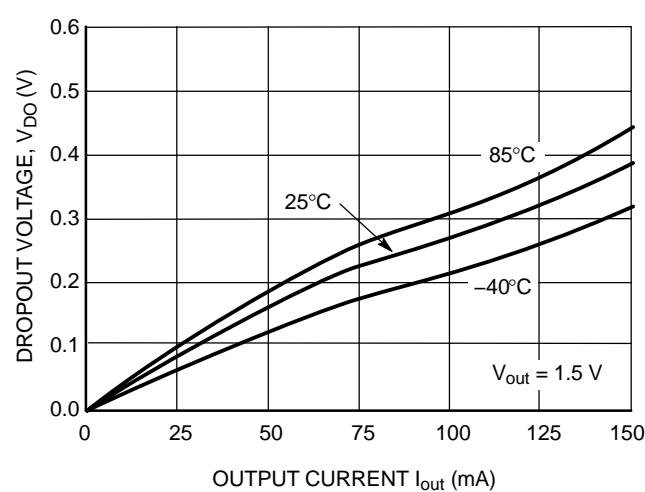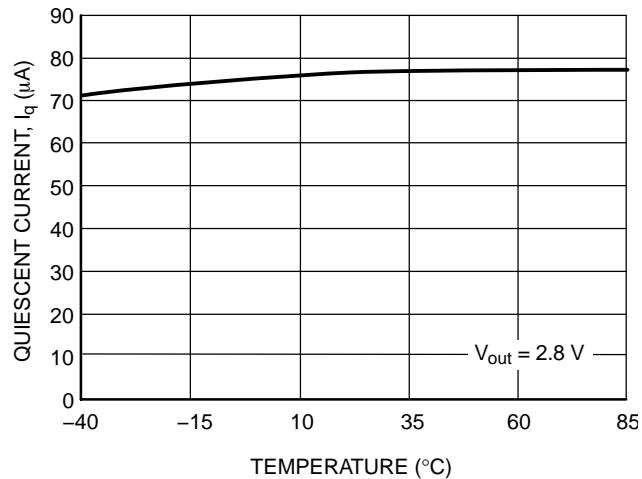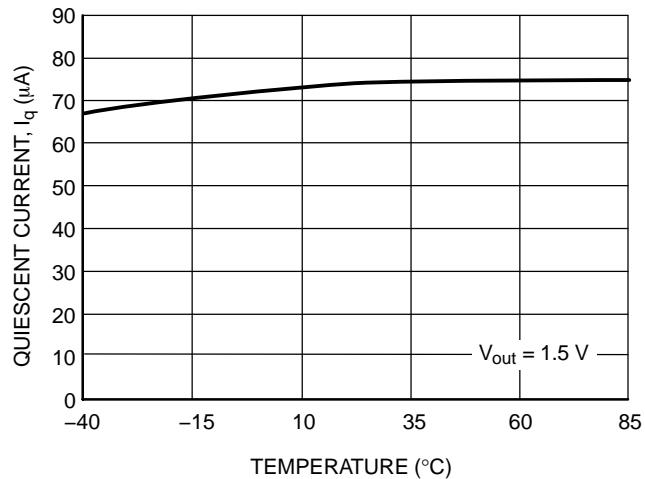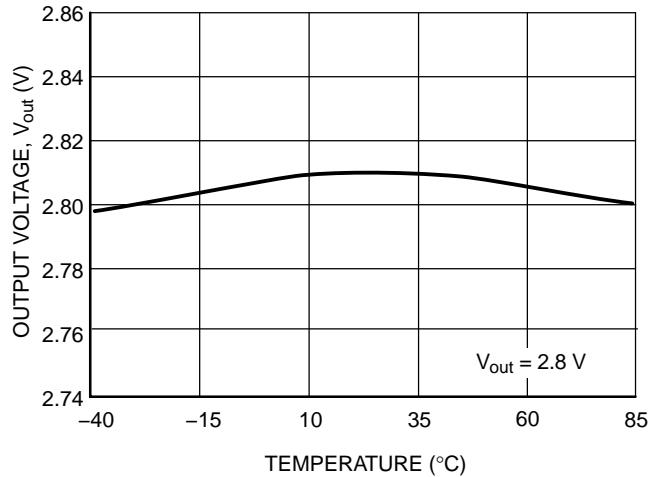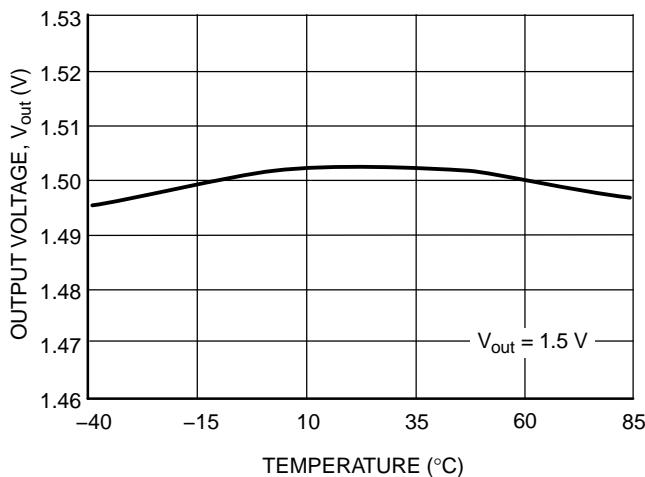

TYPICAL CHARACTERISTICS

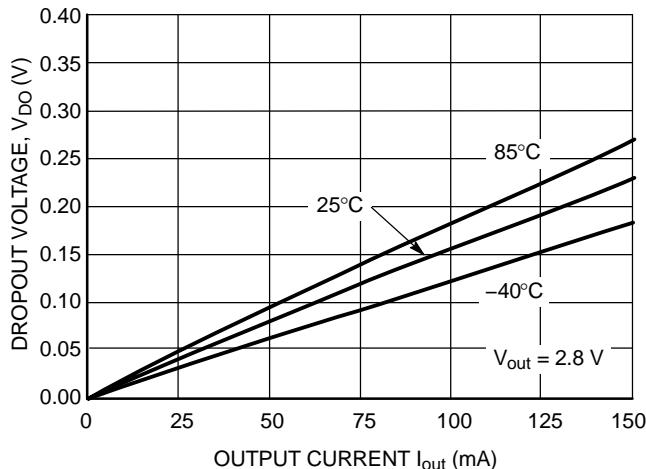


Figure 15. Dropout Voltage vs. Output Current

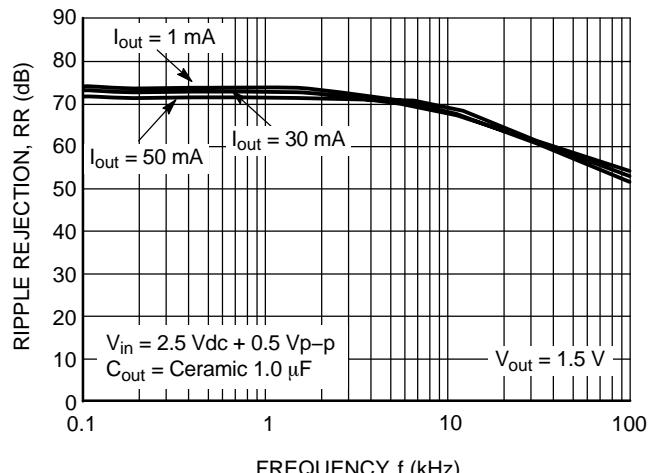


Figure 16. Ripple Rejection vs. Frequency

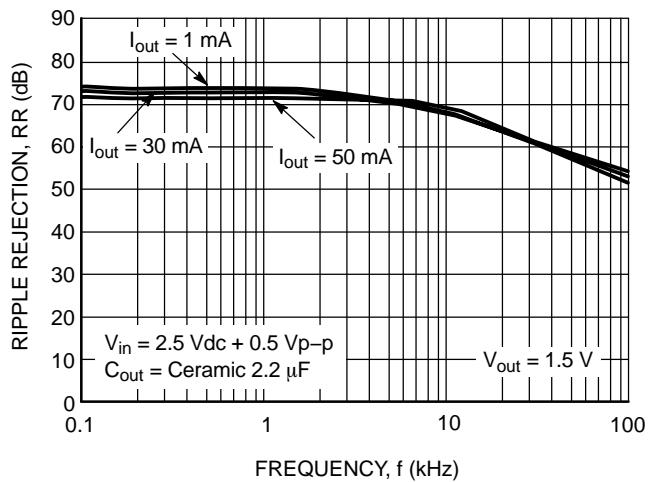


Figure 17. Ripple Rejection vs. Frequency

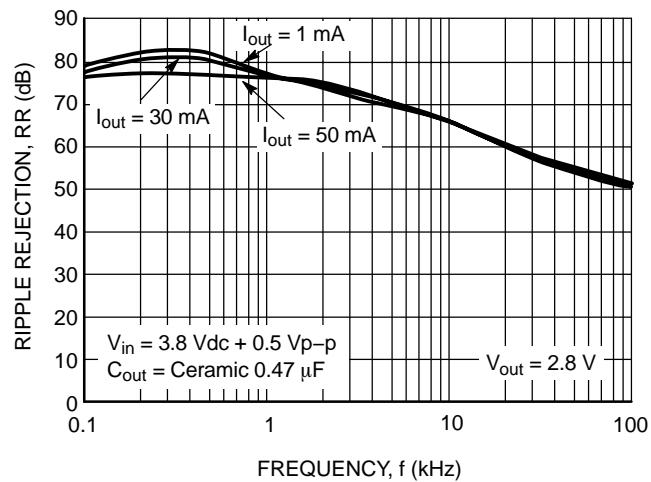


Figure 18. Ripple Rejection vs. Frequency

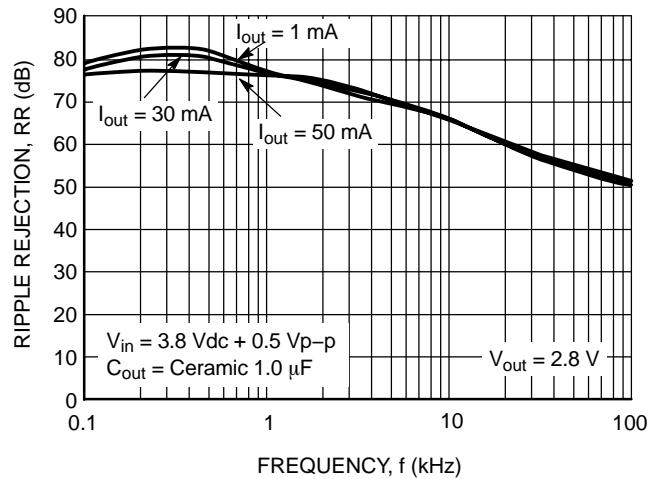


Figure 19. Ripple Rejection vs. Frequency

NCP582

TYPICAL CHARACTERISTICS

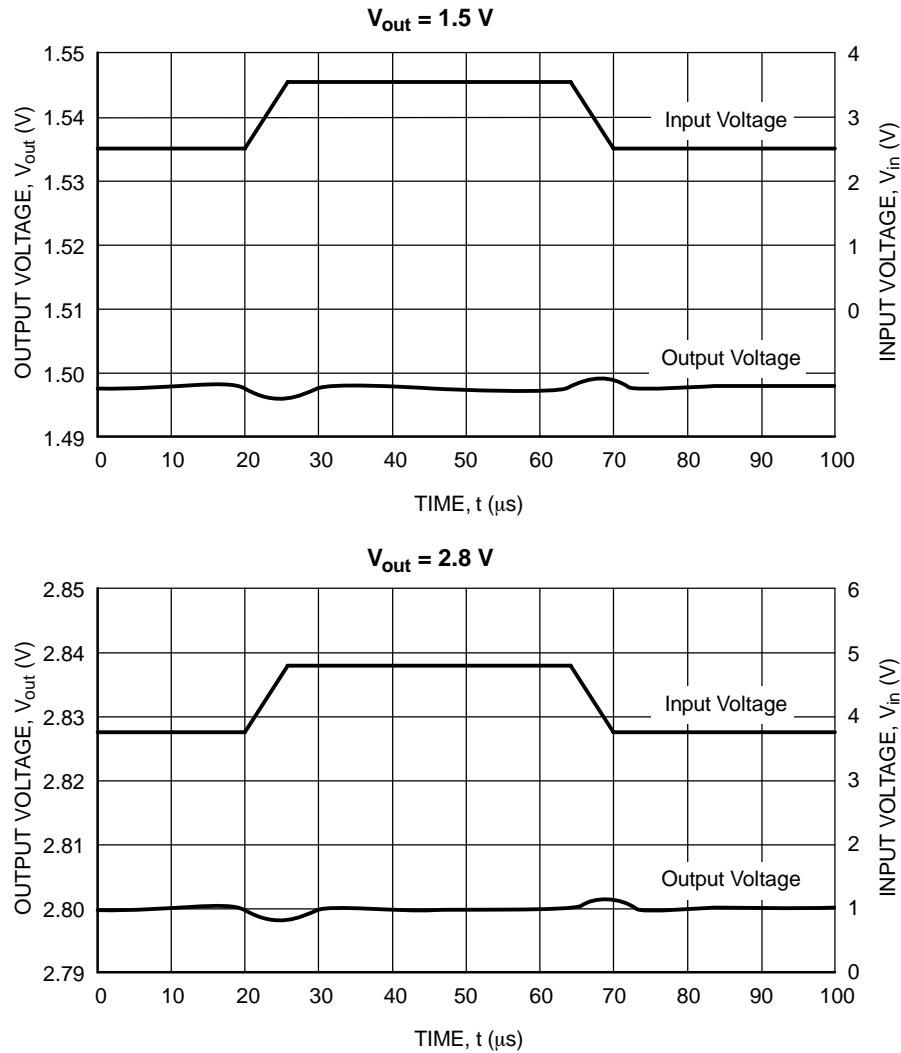


Figure 20. Input Transient Response
($I_{out} = 30 \text{ mA}$, $C_{in} = 0$, $t_r = t_f = 5.0 \mu\text{s}$, $C_{out} = 0.47 \mu\text{F}$)

NCP582

TYPICAL CHARACTERISTICS


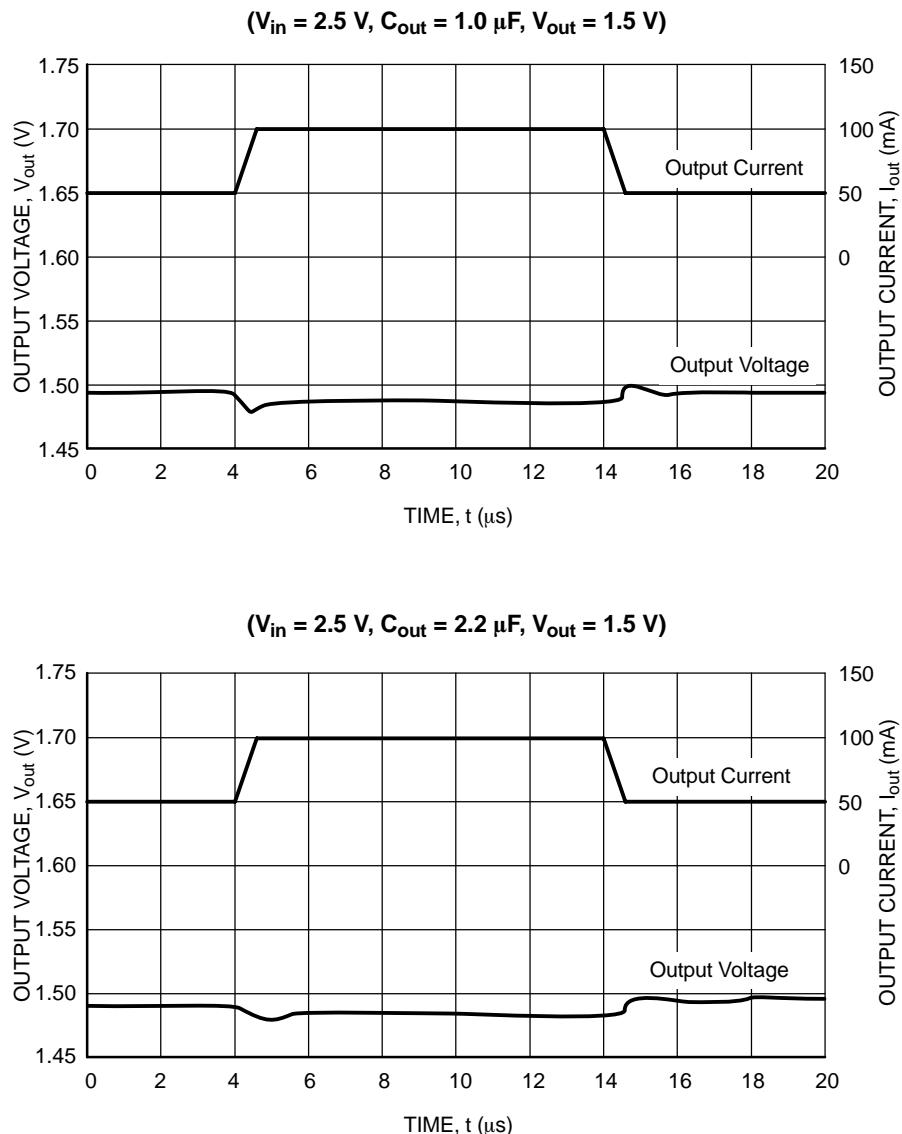


Figure 21. Load Transient Response
($t_r = t_f = 0.5 \mu\text{s}$, $C_{in} = 1.0 \mu\text{F}$)


NCP582

TYPICAL CHARACTERISTICS

($V_{in} = 3.8 \text{ V}$, $C_{out} = 0.47 \mu\text{F}$, $V_{out} = 2.8 \text{ V}$)

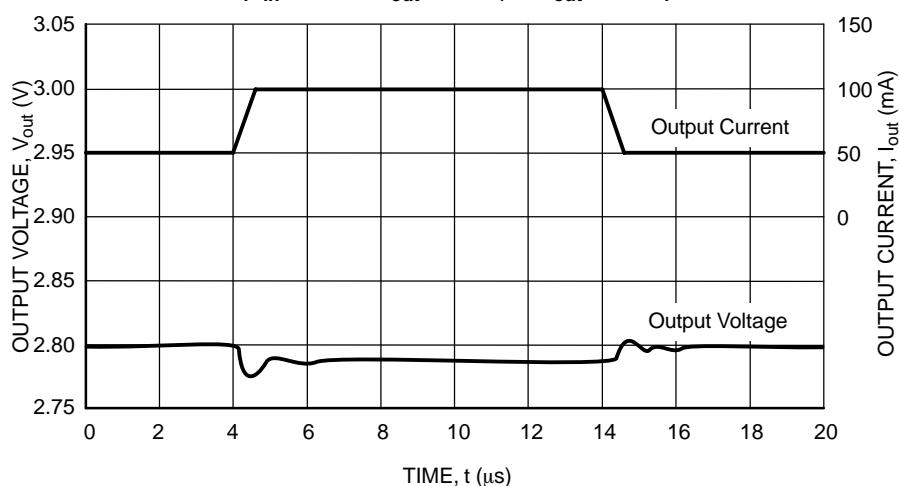

($V_{in} = 3.8 \text{ V}$, $C_{out} = 1.0 \mu\text{F}$, $V_{out} = 2.8 \text{ V}$)

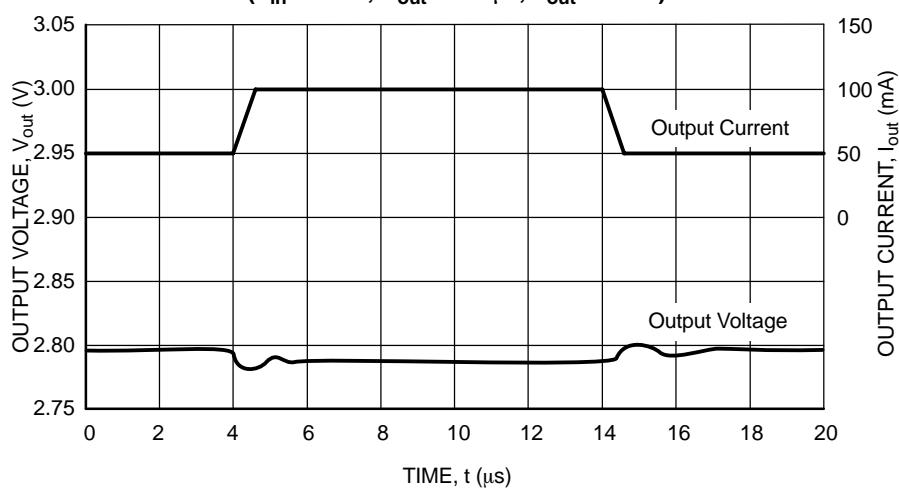

($V_{in} = 3.8 \text{ V}$, $C_{out} = 2.2 \mu\text{F}$, $V_{out} = 2.8 \text{ V}$)

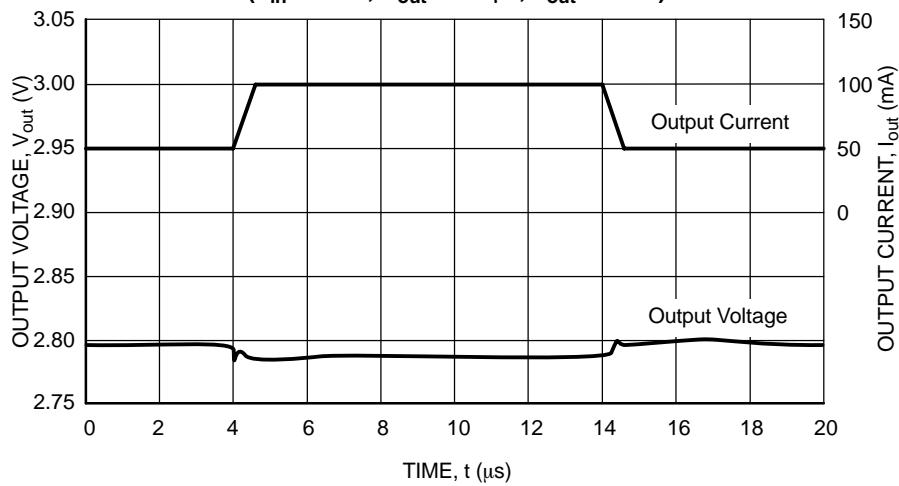


Figure 22. Load Transient Response
($t_r = t_f = 0.5 \mu\text{s}$, $C_{in} = 1.0 \mu\text{F}$)

NCP582

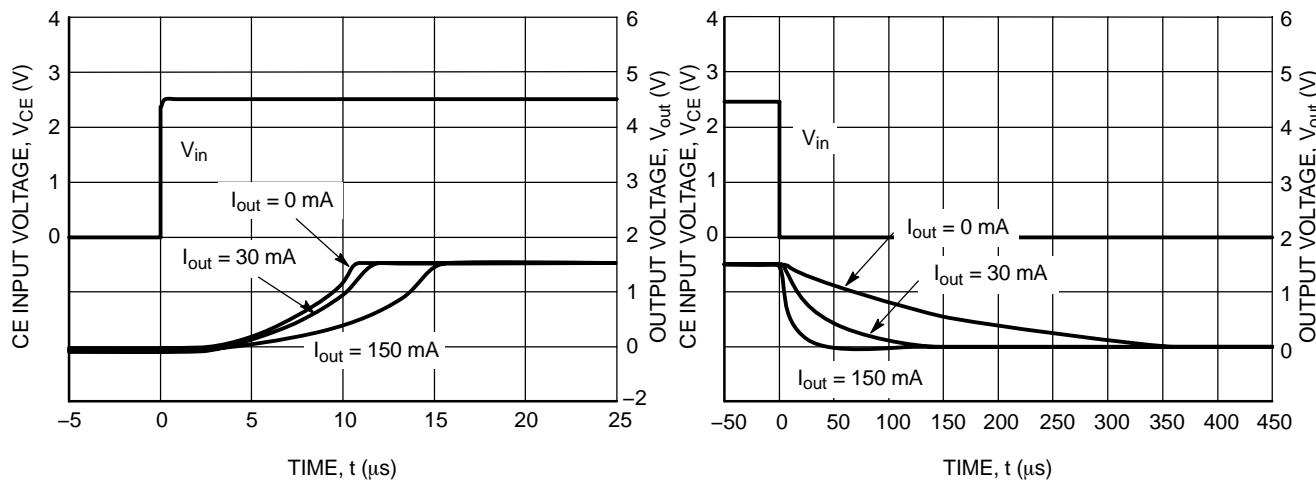


Figure 23. Turn-On/Off Speed with CE Pin (D Version)
 $(V_{out} = 1.5\text{ V}, V_{in} = 2.5\text{ V}, C_{in} = 1.0\text{ }\mu\text{F}, C_{out} = 1.0\text{ }\mu\text{F})$

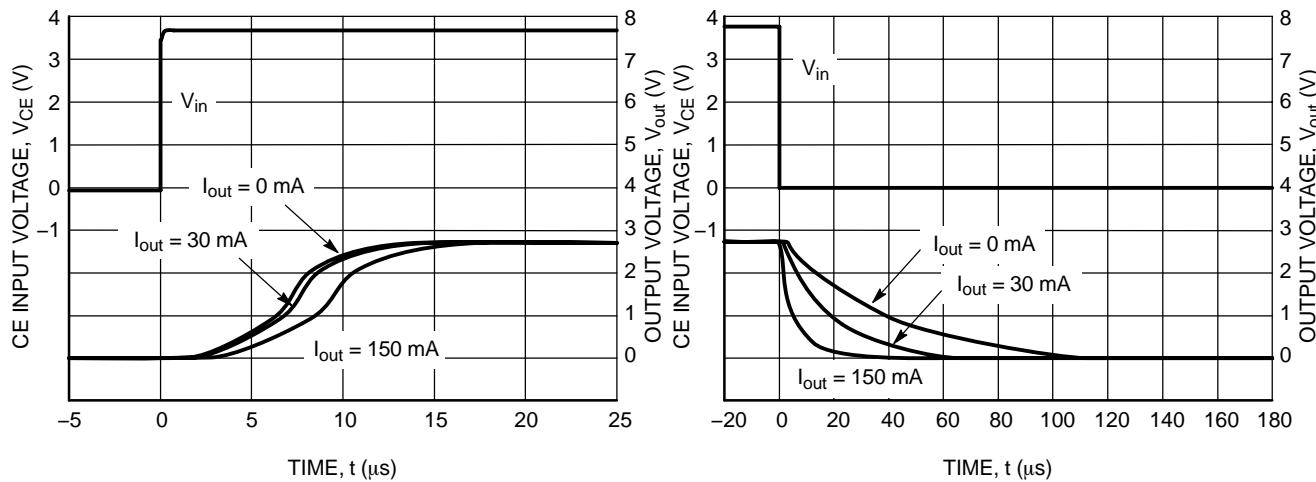


Figure 24. Turn-On/Off Speed with CE Pin (D Version)
 $(V_{out} = 2.8\text{ V}, V_{in} = 3.8\text{ V}, C_{in} = 0.47\text{ }\mu\text{F}, C_{out} = 0.47\text{ }\mu\text{F})$

APPLICATION INFORMATION

Input Decoupling

A 1.0 μF ceramic capacitor is the recommended value to be connected between V_{in} and GND. For PCB layout considerations, the traces of V_{in} and GND should be sufficiently wide in order to minimize noise and prevent unstable operation.

Output Decoupling

It is best to use a 1.0 μF capacitor value when $V_{\text{out}} < 2.5 \text{ V}$ and a 0.47 μF when $V_{\text{out}} \geq 2.5 \text{ V}$. For better

performance, select a capacitor with low Equivalent Series Resistance (ESR). For PCB layout considerations, place the output capacitor close to the output pin and keep the leads as short as possible.

Noise Decoupling

The NCP582 series are low noise regulators and reach a noise level of only 30 μVRms between 10 Hz and 100 kHz.

ORDERING INFORMATION


| Device | Output Type / Features | Nominal Output Voltage | Marking | Package | Shipping† |
|----------------|------------------------------|------------------------|---------|-------------------|------------------|
| NCP582DSQ15T1G | Active High w/Auto Discharge | 1.5 | SF | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582DSQ18T1G | Active High w/Auto Discharge | 1.8 | SJ | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582DSQ25T1G | Active High w/Auto Discharge | 2.5 | TF | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582DSQ28T1G | Active High w/Auto Discharge | 2.8 | TJ | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582DSQ30T1G | Active High w/Auto Discharge | 3.0 | UA | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582DSQ33T1G | Active High w/Auto Discharge | 3.3 | UD | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582LSQ15T1G | Active Low | 1.5 | JF | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582LSQ18T1G | Active Low | 1.8 | JJ | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582LSQ25T1G | Active Low | 2.5 | KF | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582LSQ28T1G | Active Low | 2.8 | KJ | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582LSQ30T1G | Active Low | 3.0 | LA | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582LSQ33T1G | Active Low | 3.3 | LD | SC-82AB (Pb-Free) | 3000 Tape & Reel |
| NCP582DXV15T2G | Active High w/Auto Discharge | 1.5 | F15D | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582DXV18T2G | Active High w/Auto Discharge | 1.8 | F18D | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582DXV25T2G | Active High w/Auto Discharge | 2.5 | F25D | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582DXV28T2G | Active High w/Auto Discharge | 2.8 | F28D | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582DXV29T2G | Active High w/Auto Discharge | 2.9 | F29D | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582DXV30T2G | Active High w/Auto Discharge | 3.0 | F30D | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582DXV33T2G | Active High w/Auto Discharge | 3.3 | F33D | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582LXV15T2G | Active Low | 1.5 | F15A | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582LXV18T2G | Active Low | 1.8 | F18A | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582LXV25T2G | Active Low | 2.5 | F25A | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582LXV28T2G | Active Low | 2.8 | F28A | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582LXV29T2G | Active Low | 2.9 | F29A | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582LXV30T2G | Active Low | 3.0 | F30A | SOT-563 (Pb-Free) | 4000 Tape & Reel |
| NCP582LXV33T2G | Active Low | 3.3 | F33A | SOT-563 (Pb-Free) | 4000 Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

Other voltages are available. Consult your ON Semiconductor representative.

PACKAGE DIMENSIONS

**SOT-563
XV SUFFIX
CASE 463A-01
ISSUE F**

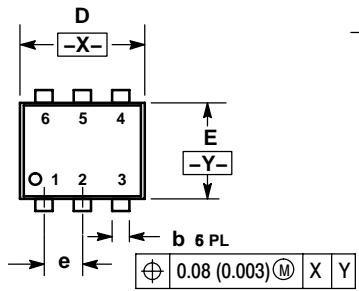


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

| DIM. | MILLIMETERS | | | INCHES | | |
|------|-------------|------|------|----------|-------|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.50 | 0.55 | 0.60 | 0.020 | 0.021 | 0.023 |
| b | 0.17 | 0.22 | 0.27 | 0.007 | 0.009 | 0.011 |
| C | 0.08 | 0.12 | 0.18 | 0.003 | 0.005 | 0.007 |
| D | 1.50 | 1.60 | 1.70 | 0.059 | 0.062 | 0.066 |
| E | 1.10 | 1.20 | 1.30 | 0.043 | 0.047 | 0.051 |
| e | 0.5 BSC | | | 0.02 BSC | | |
| L | 0.10 | 0.20 | 0.30 | 0.004 | 0.008 | 0.012 |
| H_E | 1.50 | 1.60 | 1.70 | 0.059 | 0.062 | 0.066 |

SOLDERING FOOTPRINT*



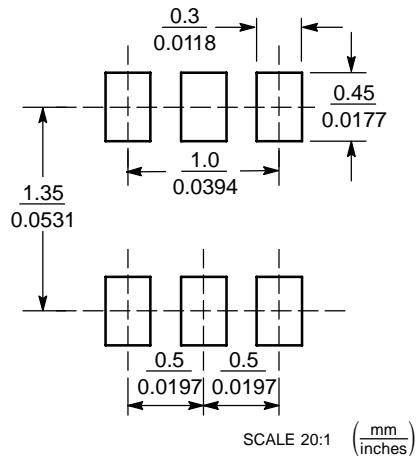


*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


NCP582

PACKAGE DIMENSIONS

**SC-82AB
SQ SUFFIX
CASE 419C-02
ISSUE E**



SOLDERING FOOTPRINT*

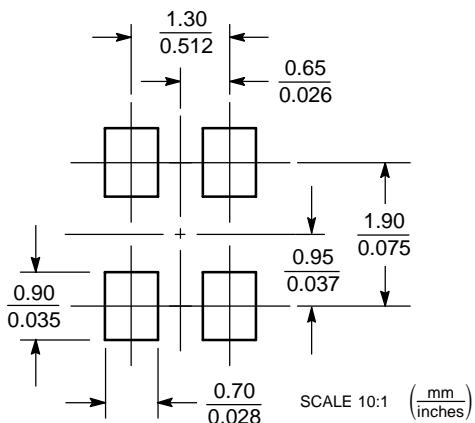

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor

P.O. Box 61312, Phoenix, Arizona 85082-1312 USA

Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada

Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada

Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051

Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.