


SBD Type : EP10LA03

FEATURES

- * JEDEC SOD-123 Package
- * Very Low profile 1.1mm Max
- * Extremely Low Forward Voltage Drop
- * Low Power Loss, High Efficiency
- * High Surge Capability
- * Low Thermal Resistance
- * Packaged in 8mm Tape and Reel

OUTLINE DRAWING

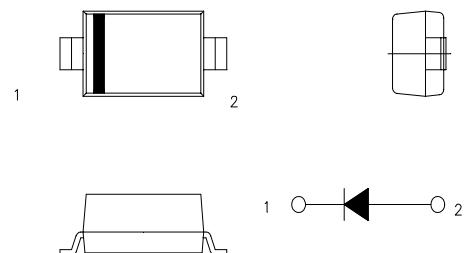

Maximum Ratings

Approx Net Weight: 0.011g

Rating	Symbol	EP10LA03				Unit	
Repetitive Peak Reverse Voltage	V_{RRM}	30				V	
Direct Forward Current	I_{dc}	1.0	$T_l=100^\circ C$ *		Direct Current	A	
		1.0	$T_a=30^\circ C$				
Average Rectified Output Current	I_o	0.8	$T_l=98^\circ C$		Rectangular Current	A	
		0.8	$T_a=25^\circ C$				
Surge Forward Current	I_{FSM}	12	50Hz Half Sine Wave, 1cycle Non-repetitive				
Operating Junction Temperature Range	T_{jw}	-40 to +125				°C	
Storage Temperature Range	T_{stg}	-40 to +125				°C	

Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j = 25^\circ C, V_{RM} = V_{RRM}$	-	-	2	mA
Peak Forward Voltage	V_{FM}	$T_j = 25^\circ C, I_{FM} = 1.0A$	-	-	0.39	V
Thermal Resistance	$R_{th(j-a)}$	Junction to Ambient *	-	-	270	°C /W
	$R_{th(j-l)}$	Junction to Lead	-	-	70	

* Glass Epoxy Substrate Mounted (Soldering Lands=1x1mm, Both Sides)
(T_l : Lead Temperature)

EP10LA03 OUTLINE DRAWING (Dimensions in mm)
