# PRECISION 1.25 VOLT MICROPOWER VOLTAGE REFERENCE


## **DESCRIPTION**

The ZRA125 uses a bandgap circuit design to achieve a precision micropower voltage reference of 1.25 volts. The device is available in small outline surface mount packages, ideal for applications where space saving is important.

The ZRA125 design provides a stable voltage without an external capacitor and is stable with capacitive loads. The ZRA125 is recommended for operation between  $50\mu A$  and 5mA and so is ideally suited to low power and battery powered applications.

Excellent performance is maintained to a suggested absolute maximum of 25mA, however the rugged design and 20 volt processing allows the reference to withstand transient effects and currents up to 200mA. Superior switching capability allows the device to reach stable operating conditions in only a few microseconds.

# **SCHEMATIC DIAGRAM**

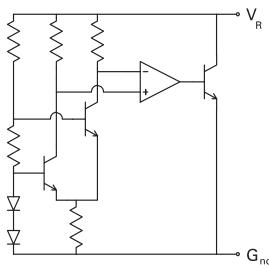

## **FEATURES**

- · No stabilizing capacitor required
- Typical T<sub>C</sub> 30ppm/°C
- Typical slope resistance  $0.65\Omega$
- ± 3% and 2% tolerance
- Industrial temperature range
- Operating current 50μA to 5mA
- Transient response, stable in less than 10μs
- Small outline SOT23 package

# **APPLICATIONS**

- · Battery powered and portable equipment
- · Metering and measurement systems
- Instrumentation
- Data acquisition systems
- Precision power supplies
- Test equipment



# **ZRA125**

# **ABSOLUTE MAXIMUM RATINGS**

Reverse current 25mA Forward current 25mA -40 to 85°C Operating temperature -55 to 150°C Storage temperature

# **POWER DISSAPATION (T<sub>amb</sub> = 25°C)** SOT23 330mW

# **ELECTRICAL CHARACTERISTICS** (at T<sub>amb</sub> = 25°C unless otherwise stated)


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	TOL %	UNITS
V <sub>R</sub>	Reverse breakdown voltage	I <sub>R</sub> = 150μA	1.225 1.21	1.25 1.25	1.275 1.29	2 3	V
I <sub>MIN</sub>	Minimum operating current			30	50		μΑ
I <sub>R</sub>	Recommended operating current		0.05		5		mA
T <sub>C</sub> <sup>(1)</sup>	Average reverse breakdown voltage temp. co.	I <sub>R</sub> (min) to I <sub>R</sub> (max)		30	90		ppm/°C
R <sub>S</sub> <sup>(2)</sup>	Slope resistance			0.65	2		Ω
Z <sub>R</sub>	Reverse dynamic impedance	I <sub>R</sub> = 1mA f = 100Hz I <sub>AC</sub> = 0.1I <sub>R</sub>		0.5	1		Ω
E <sub>N</sub>	Wideband Noise Voltage	I <sub>R</sub> = 150μA f = 100Hz to 10kHZ		40			μV(rms)

## NOTES:

(1) 
$$T_C = \frac{V_R \text{ change } x \text{ 1,000,000}}{V_R \text{ X temperature change}}$$

T<sub>C</sub> is a characterized parameter not measured on


(2) 
$$R_{S} = \frac{V_{R} \ change \ (I_{R}(\min) \ to \ (\min) \ to \ I_{R}(\max))}{I_{R}(\max) - I_{R}(\min)}$$

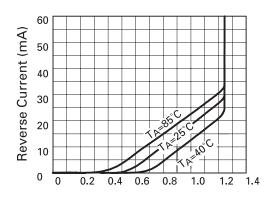

Reverse Voltage (V) **Reverse Characteristics** 



# TYPICAL CHARACTERISTICS

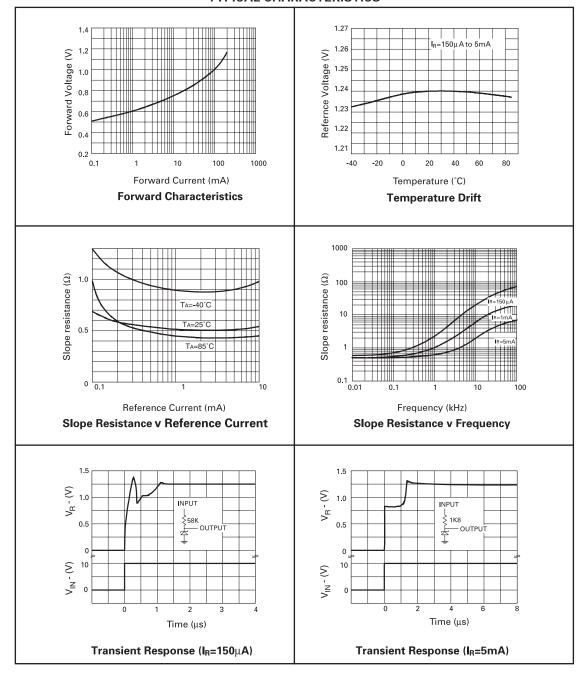


ISSUE 3 - MARCH 2004



# **ZRA125**

# **CONNECTION DIAGRAM**

Package Suffix - F



TOP VIEW
Pin 1 floating or connected to pin 2

# **ORDERING INFORMATION**

Part Number	Tol %	Package	Part Mark	Reel Size	Quantity per reel
ZRA125F02TA	2	SOT23	12B	7"	3,000
ZRA125F03TA	3	SOT23	12A	7"	3,000




# **ZRA125**

# **PACKAGE OUTLINE**

# 3 FEADS B

# **PAD LAYOUT DETAILS**

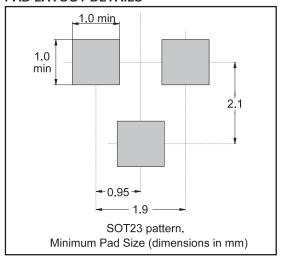

Controlling dimensions are in millimeters. Approximate conversions are given in inches

# **PACKAGE DIMENSIONS**

	Millimeters		Inches			Millimeters		Inches	
DIM	Min	Max	Min	Max	DIM	Min	Max	Max	Max
Α	2.67	3.05	0.105	0.120	Н	0.33	0.51	0.013	0.020
В	1.20	1.40	0.047	0.055	K	0.01	0.10	0.0004	0.004
С	_	1.10	_	0.043	L	2.10	2.50	0.083	0.0985
D	0.37	0.53	0.015	0.021	М	0.45	0.64	0.018	0.025
F	0.085	0.15	0.0034	0.0059	N	0.95 NOM		0.0375 NOM	
G	1.90	NOM	0.075	NOM	_	_		_	

## © Zetex plc 2004

Europe	Americas	Asia Pacific	Corporate Headquaters
Zetex GmbH	Zetex Inc	Zetex (Asia) Ltd	Zetex plc
Streitfeldstraße 19	700 Veterans Memorial Hwy	3701-04 Metroplaza Tower 1	Fields New Road, Chadderton
D-81673 München	Hauppauge, NY 11788	Hing Fong Road, Kwai Fong	Oldham, OL9 8NP
Germany	USA	Hong Kong	United Kingdom
Telefon: (49) 89 45 49 49 0	Telephone: (1) 631 360 2222	Telephone: (852) 26100 611	Telephone (44) 161 622 4444
Fax: (49) 89 45 49 49 49	Fax: (1) 631 360 8222	Fax: (852) 24250 494	Fax: (44) 161 622 4446
europe.sales@zetex.com	<u>usa.sales@zetex.com</u>	<u>asia.sales@zetex.com</u>	<u>hq@zetex.com</u>

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com



# ISSUE 3 - MARCH 2004