

Features

- SMA package
- Surface mount
- Very low forward voltage drop

CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode

General Information

The markets of portable communications, computing and video equipment are challenging the semiconductor industry to develop increasingly smaller electronic components.

Bourns offers Schottky Rectifier Diodes for rectification applications, in compact chip package DO-214AC (SMA) size format, which offer PCB real estate savings and are considerably smaller than competitive parts. The Schottky Rectifier Diodes offer a forward current of 2 A with a choice of repetitive peak reverse voltage of 20 V up to 60 V.

Bourns® Chip Diodes conform to JEDEC standards, easy to handle on standard pick and place equipment and their flat configuration makes roll away much more difficult.

Electrical Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	CD214A-						Unit
		B220	B230	B240	B240L	B250	B260	
Forward Voltage (Max.) (I _f = 2 A)	V _F	0.5	0.5	0.5	0.43	0.7	0.7	V
Typical Junction Capacitance*	C _T	200						pF
Reverse Current (Max.) at Rated V _R)	I _R	0.5	0.5	0.5	2.0	0.5	0.5	mA

* Measured at 1.0 MHz and applied reverse voltage of 4.0 V DC.

Absolute Ratings (@ T_A = 25 °C Unless Otherwise Noted)

Parameter	Symbol	CD214A-						Unit
		B220	B230	B240	B240L	B250	B260	
Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	40	50	60	V
Reverse Voltage	V _R	20	30	40	40	50	60	V
Maximum RMS Voltage	V _{RMS}	14	21	28	28	35	42	V
Avg. Forward Current	I _O	2						A
Forward Current, Surge Peak (60 Hz, 1 cycle)	I _{surge}	50	50	50	25	50	50	A
Typical Thermal Resistance**	R _{θJL}	15	15	15	18	15	15	°C/W
Storage Temperature	T _{STG}	-55 to +150						°C
Junction Temperature	T _J	-55 to +125						°C

** Thermal resistance junction to lead.



Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555 • Fax: +41-41 768 5510

North America:

Tel: +1-909 781-5500 • Fax: +1-909 781-5700

www.bourns.com

How To Order

CD 214A - B 2 40 L

Common Code _____
Chip Diode

Package _____
• 214A = SMA/DO-214AC

Model _____
B = Schottky Barrier Series

Average Forward Current (I_O) Code _____
2 = 2 A (Code x 1000 mA = Average Forward Current)

Reverse Voltage (V_R) Code _____
30 = 30 V
40 = 40 V
60 = 60 V


Forward Voltage Suffix _____
L = Low Forward Voltage V_f (CD214-B240L)

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode




Product Dimensions

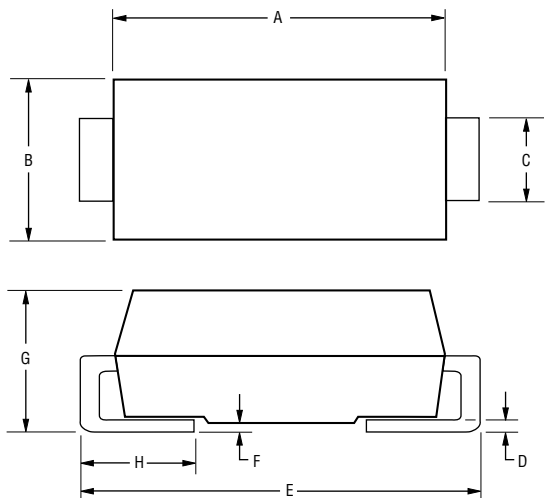

Dimension	SMA (DO-214AC)
A	$\frac{4.06 - 4.57}{(0.160 - 0.180)}$
B	$\frac{2.29 - 2.92}{(0.090 - 0.115)}$
C	$\frac{1.27 - 1.63}{(0.050 - 0.064)}$
D	$\frac{0.15 - 0.31}{(0.006 - 0.110)}$
E	$\frac{4.83 - 5.59}{(0.190 - 0.220)}$
F	$\frac{0.05 - 0.20}{(0.002 - 0.008)}$
G	$\frac{2.01 - 2.62}{(0.080 - 0.103)}$
H	$\frac{0.76 - 1.52}{(0.030 - 0.060)}$

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Recommended Pad Layout

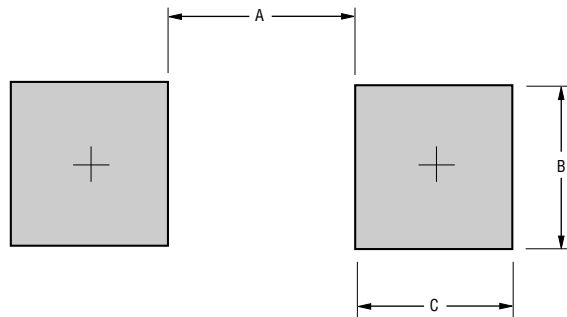

Dimension	SMA (DO-214AC)
A (Max.)	$\frac{2.69}{(0.106)}$
B (Min.)	$\frac{2.10}{(0.083)}$
C (Min.)	$\frac{1.27}{(0.050)}$

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Physical Specifications

CaseMolded plastic
 PolarityIndicated by cathode band
 Weight0.002 ounces / 0.064 grams

Typical Part Marking


CD214A-B220 **B** 220
 CD214A-B230 **B** 230
 CD214A-B240 **B** 240
 CD214A-B240L **B** 240L
 CD214A-B250 **B** 250
 CD214A-B260 **B** 260

CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD214A-B220


Forward Characteristics

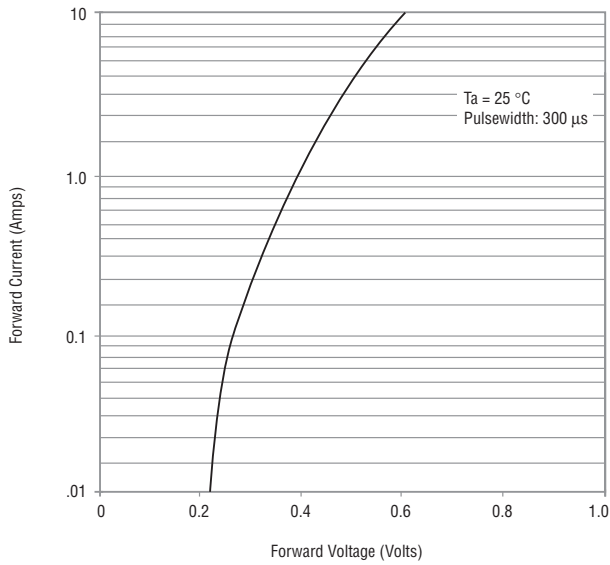


Reverse Characteristics

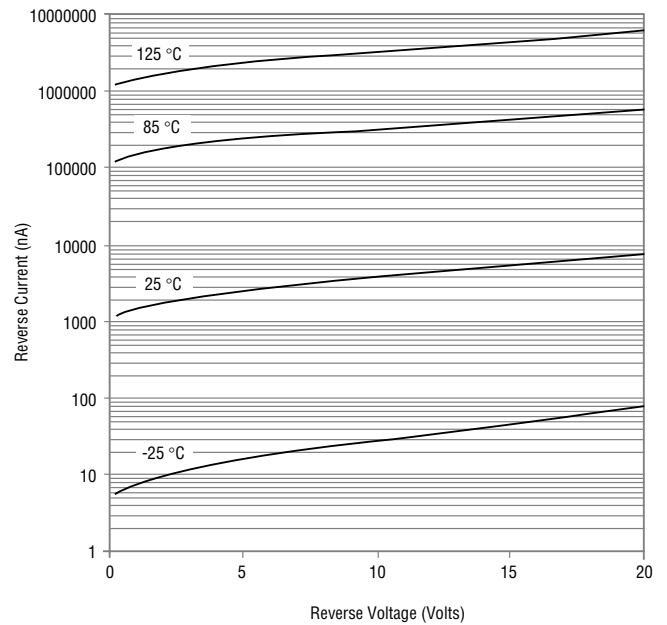

Derating Curve

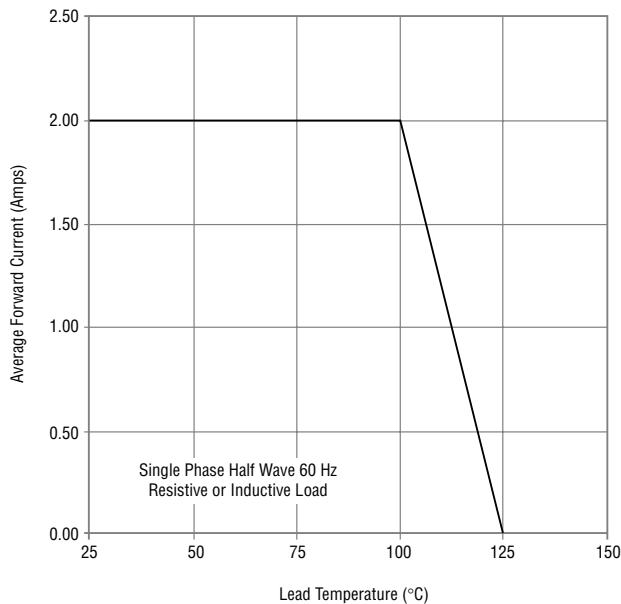

Capacitance Between Terminals

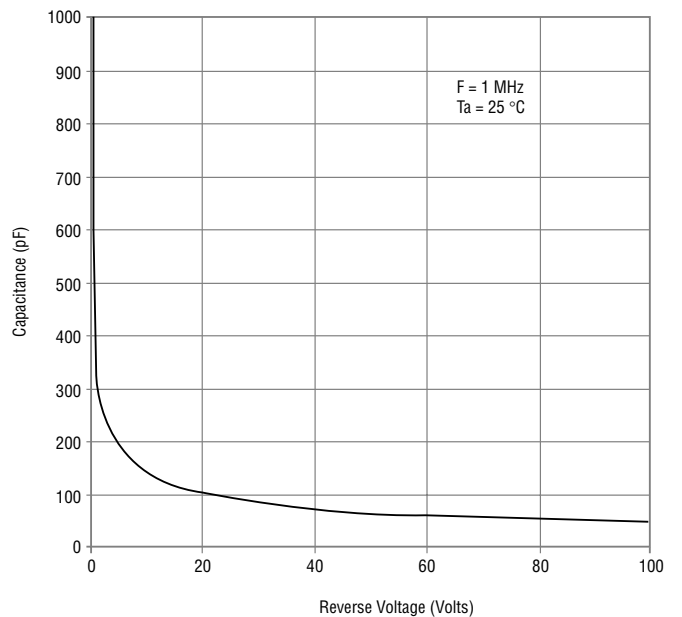


CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD214A-B230


Forward Characteristics

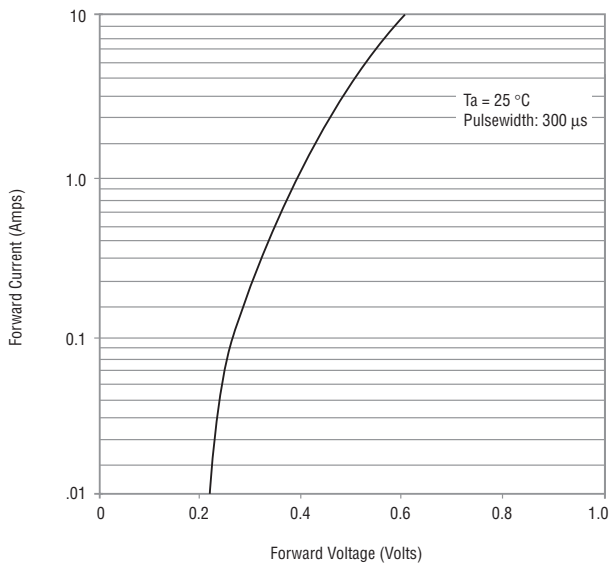


Reverse Characteristics

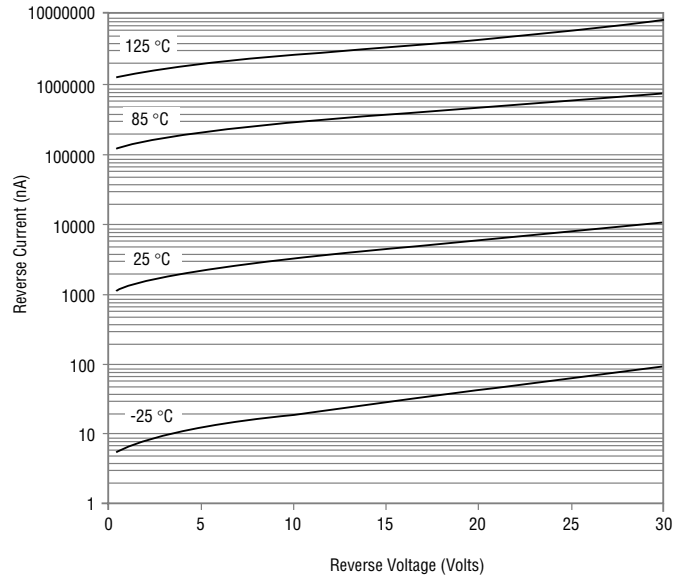

Derating Curve

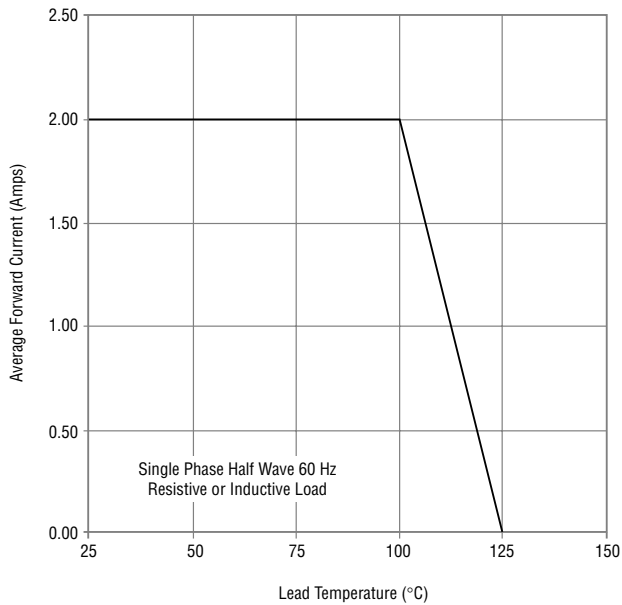

Capacitance Between Terminals

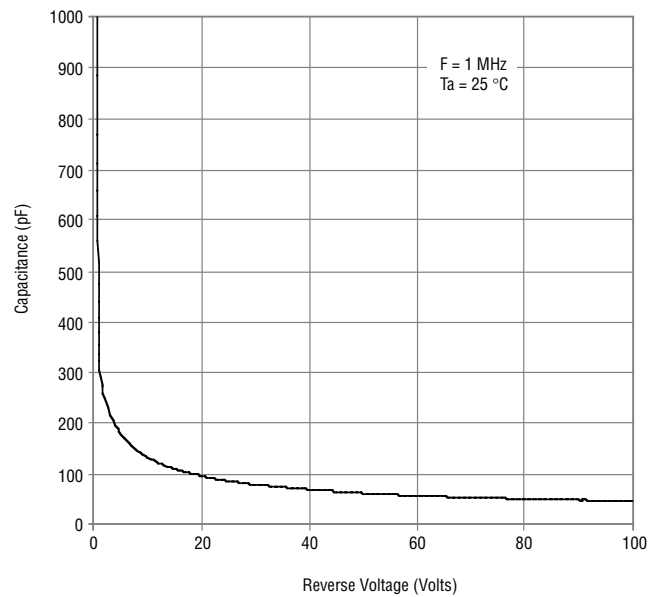


CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD214A-B240


Forward Characteristics

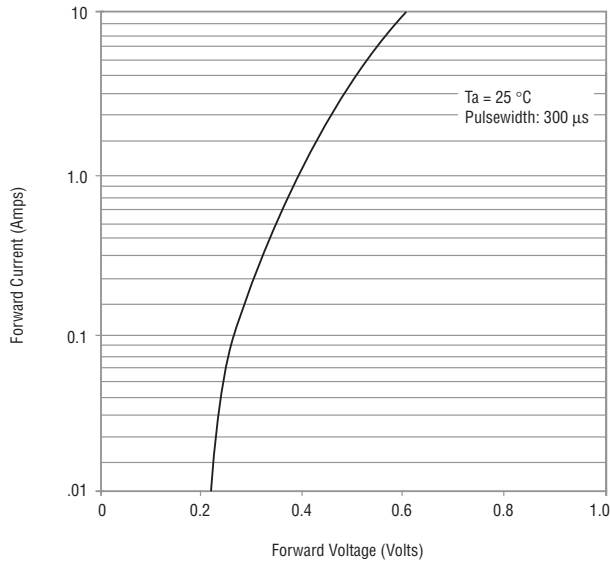


Reverse Characteristics

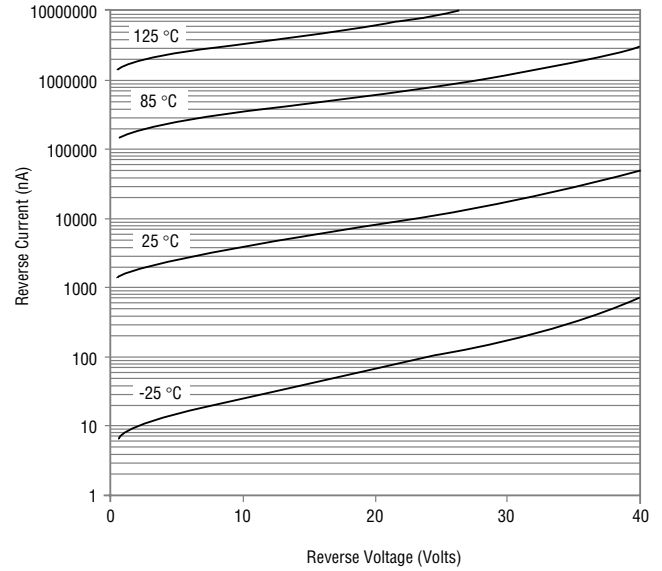

Derating Curve

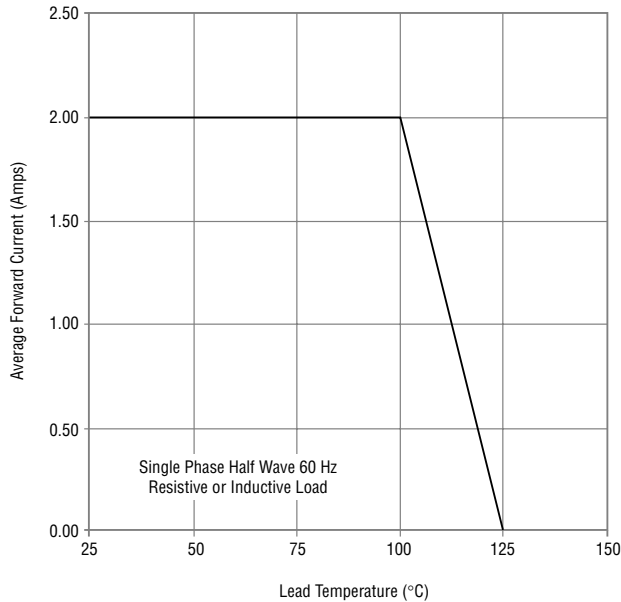

Capacitance Between Terminals

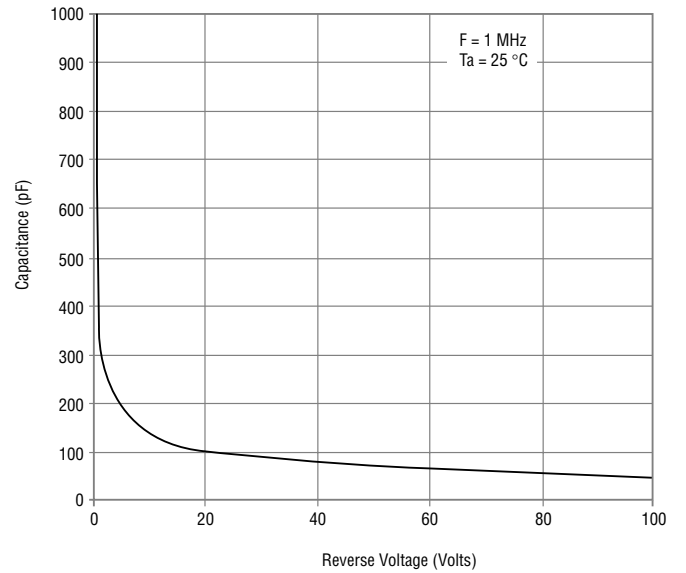


CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD214A-B240L


Forward Characteristics

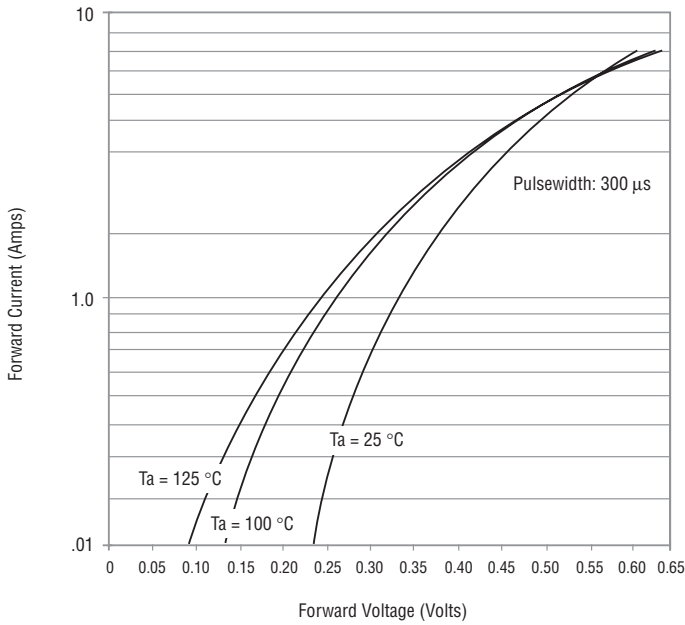


Reverse Characteristics

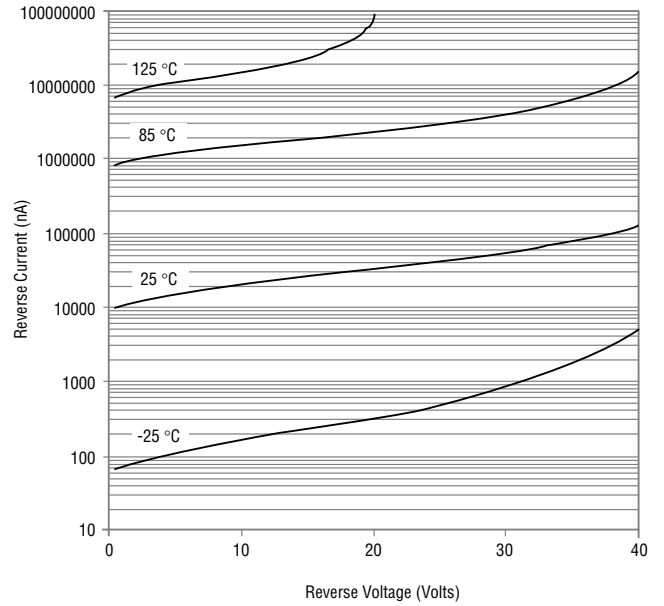

Derating Curve

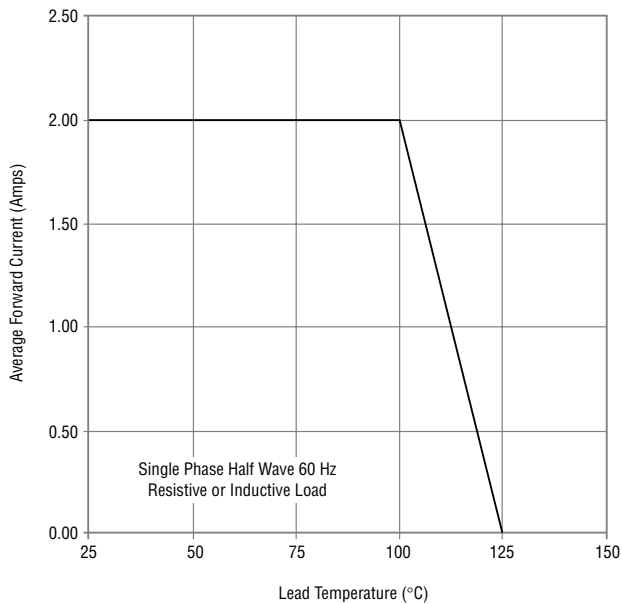

Capacitance Between Terminals

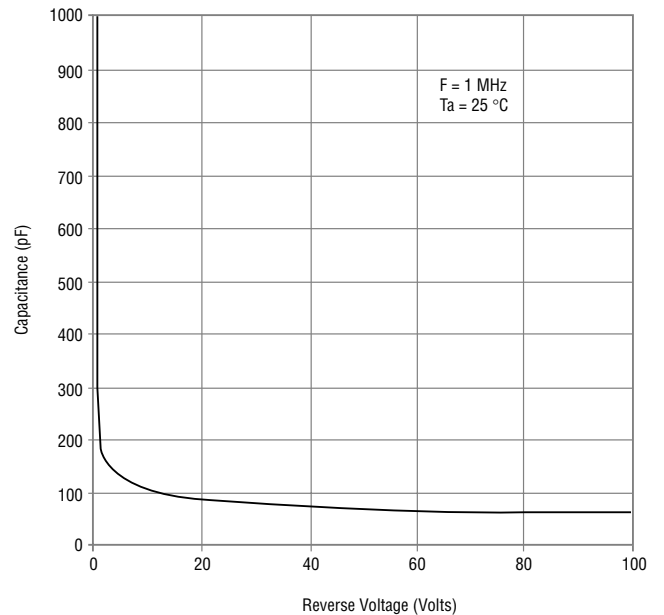


CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD214A-B250


Forward Characteristics

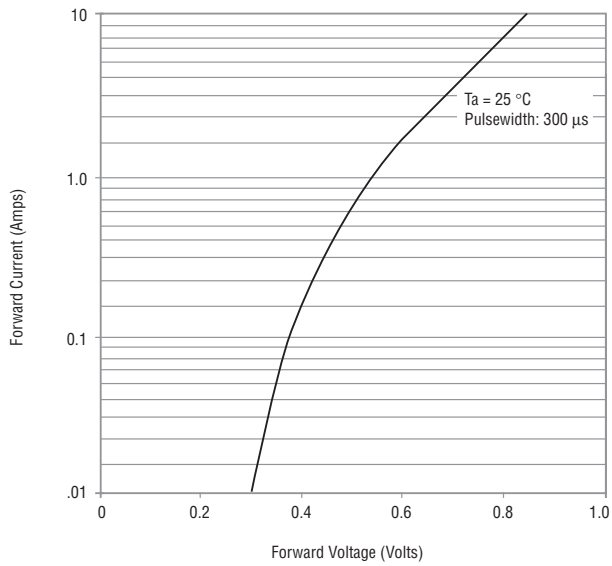


Reverse Characteristics

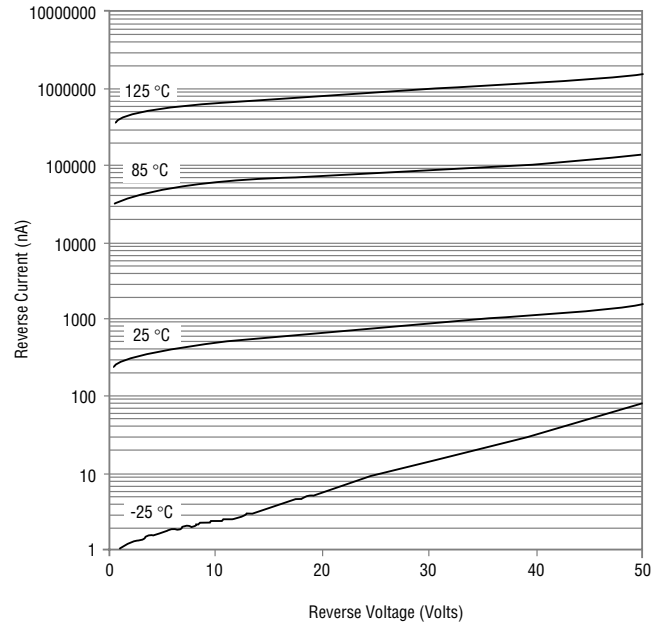

Derating Curve

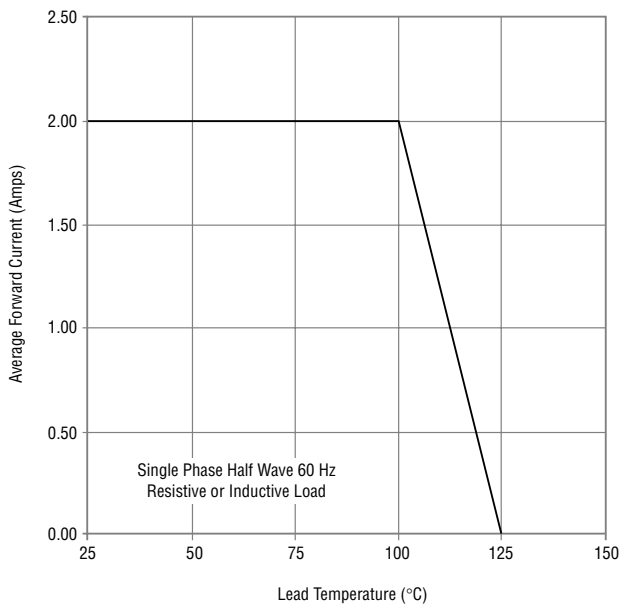

Capacitance Between Terminals

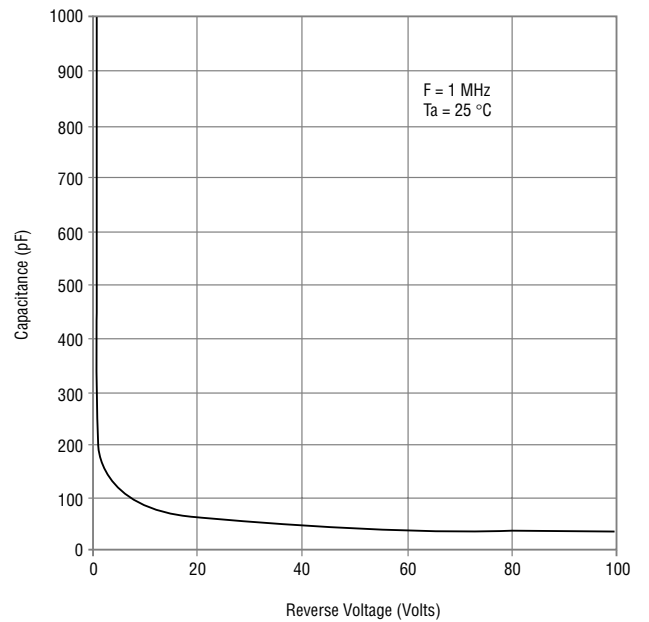


CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode




Rating and Characteristic Curves: CD214A-B260


Forward Characteristics

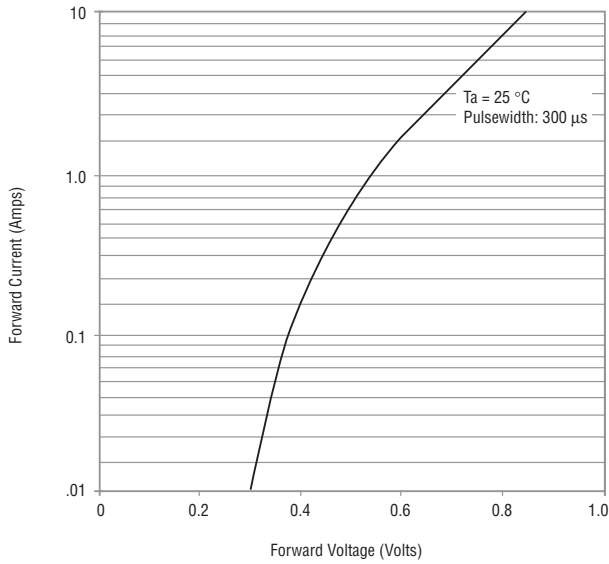


Reverse Characteristics

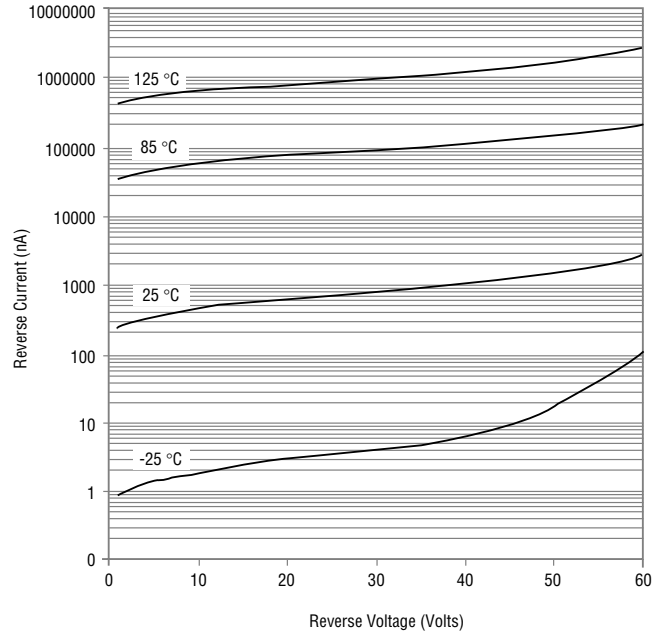

Derating Curve

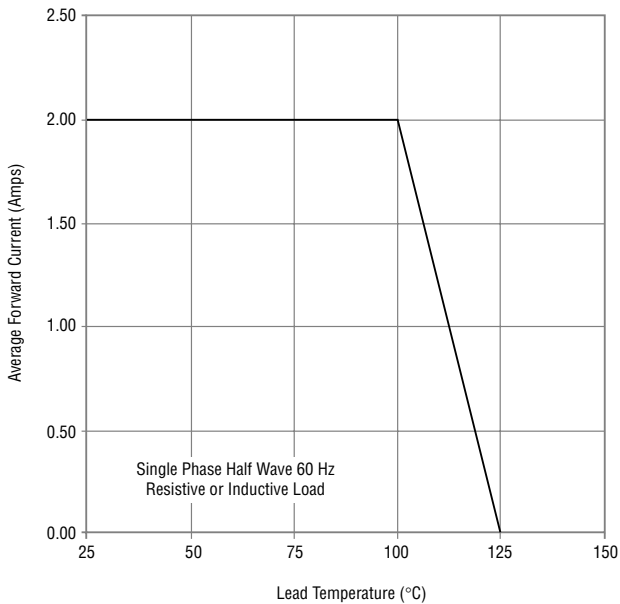

Capacitance Between Terminals

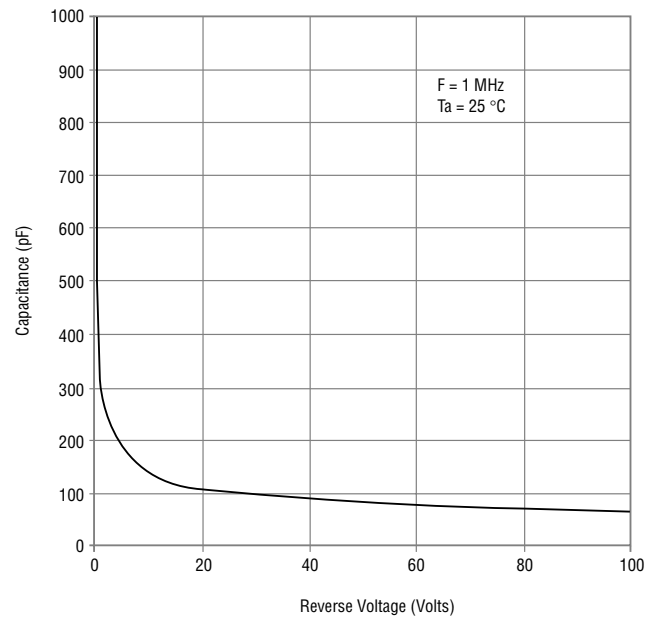


CD214A-B220 ~ B260 Schottky Barrier Rectifier Chip Diode

BOURNS®

Packaging Information

The product will be dispensed in Tape and Reel format (see diagram below).

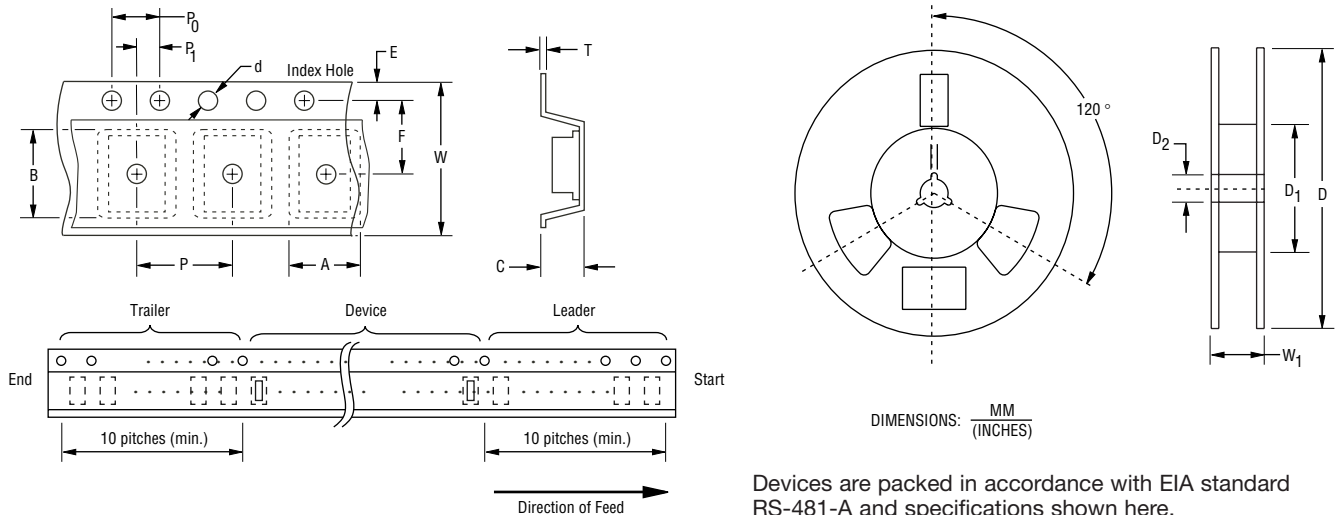

Item	Symbol	SMA (DO-214AC)
Carrier Width	A	$\frac{2.90 \pm 0.10}{(0.114 - 0.004)}$
Carrier Length	B	$\frac{5.59 \pm 0.10}{(0.220 - 0.004)}$
Carrier Depth	C	$\frac{2.36 \pm 0.10}{(0.093 - 0.004)}$
Sprocket Hole	d	$\frac{1.55 \pm 0.05}{(0.061 - 0.002)}$
Reel Outside Diameter	D	$\frac{330}{(12.992)}$
Reel Inner Diameter	D ₁	$\frac{50.0}{(1.969)}$ MIN.
Feed Hole Diameter	D ₂	$\frac{13.0 \pm 0.20}{(0.512 - 0.008)}$
Sprocket Hole Position	E	$\frac{1.75 \pm 0.10}{(0.069 - 0.004)}$
Punch Hole Position	F	$\frac{5.50 \pm 0.05}{(0.217 - 0.002)}$
Punch Hole Pitch	P	$\frac{4.00 \pm 0.10}{(0.157 - 0.004)}$
Sprocket Hole Pitch	P ₀	$\frac{4.00 \pm 0.10}{(0.157 - 0.004)}$
Embossment Center	P ₁	$\frac{2.00 \pm 0.05}{(0.079 - 0.002)}$
Overall Tape Thickness	T	$\frac{0.30 \pm 0.10}{(0.012 - 0.004)}$
Tape Width	W	$\frac{12.00 \pm 0.20}{(0.472 - 0.008)}$
Reel Width	W ₁	$\frac{18.4}{(0.724)}$ MAX.
Quantity per Reel	--	5,000