


形名	社名	最大定格						順方向特性		逆方向特性		Ct (pF)		測定条件		t _{rr} (ns)	その他の特性等	外形
		V _{RRM}	V _R	I _{FM}	I _{o, I_{FM}}	I _{FSM}	P	I _{fmin}	測定条件	I _{rmax}	測定条件	typ	max	V _r (V)	typ			
		(V)	(V)	(mA)	(mA)	(A)	(mW)	(mA)	V _F (V)	(μ A)	V _r (V)							
RB420D	ローム	20			100	1		100	0.55	1	10	6		10			2素子センタ-タップ' (カソードコモン)	610A
RB421D	ローム	20			100	1		100	0.55	30	10					610A		
RB425D	ローム	20			100	1		100	0.55	30	10					610C		
RB441Q	ローム	20	10		100	1		10	0.34	10	10	6		10		78E		
RB450F	ローム	25			100	1		10	0.45	1	10					205A		
RB451F	ローム	20			100	1		100	0.55	30	10	6		10		2素子複合	205A	
RB471E	ローム	20			100	1		100	0.55	30	10						269C	
RB500H	ローム	20	10		100	1		100	0.55	1	10	6		10			420E	
RB501H	ローム	25	20		100	1		100	0.55	30	10	6		10			420E	
RB705D	ローム	25	20		30	0.2		1	0.37	1	10	2		1			485F	
RB715F	ローム	25	20		30	0.2		1	0.37	1	10	2		1		V _{RSM} =55V	421B	
RB717F	ローム	25	20		30	0.2		1	0.37	1	10	2		1			421B	
RB721Q	ローム	25	20		30	0.2		1	0.37	1	10	2		1			78E	
RB751H	ローム	25	20		30	0.2		1	0.37	1	10	2		1			420E	
SB01-05CP	三洋	50			100	2		100	0.55	15	25	4.4		10	10		610A	
SB01-05Q	三洋	50			100	2		100	0.55	15	25	4.4		10	10	V _{RSM} =55V, 2素子センタ-タップ' (カソードコモン)	205A	
SB01-05SPA	三洋	50			100	2		100	0.55	15	25	4.7		10	10		368D	
SB01-15CP	三洋	150			100	5		100	0.75	50	75	7		10	10		610A	
SB01-15NP	三洋	150			100	5		100	0.75	50	75	8		10	10		730G	
SB01W05C	三洋	50			100	2		100	0.55	15	25	4.4		10	10		610D	
SB01W05S	三洋	50			100	2		100	0.55	15	25	4.7		10	10	V _{RSM} =55V, 2素子センタ-タップ' (カソードコモン)	368A	
SB02-03C	三洋	30			200	2		200	0.55	15	15	6.3		10	10		610A	
SB02-03Q	三洋	30			200	2		200	0.55	15	15	6.3		10	10	205A		
SB02-03S	三洋	30			200	2		200	0.55	15	15	6.6		10	10	368D		
SB02-09CP	三洋	90			200	5		200	0.7	50	45	10		10	10	610A		
SB02-09NP	三洋	90			200	5		200	0.7	50	45	11		10	10	730G		
SB02-15	三洋	150			200	10		200	0.75	80	75	22		10	10		64	
SB02W03C	三洋	30			200	2		200	0.55	15	15	6.3		10	10	610D		
SB02W03S	三洋	30			200	2		200	0.55	15	15	6.6		10	10		368A	
SB20W03Z	三洋	30			200	20		200	0.55	100	15	70		10	20	563		
SB002-15CP	三洋	150			20	2		20	0.75	15	75	2.3		10	10	610A		
SB002-15SPA	三洋	150			20	2		20	0.75	15	75	2.6		10	10		368D	
SB005-09CP	三洋	90			50	2		50	0.7	15	45	2.8		10	10	610A		
SB005-09SPA	三洋	90			50	2		50	0.7	15	45	3.2		10	10		368D	
SB007-03CP	三洋	30			70	2		70	0.55	5	15	3		10	10	610A		
SB007-03Q	三洋	30			70	2		70	0.55	5	15	3		10	10	205A		
SB007-03SPA	三洋	30			70	2		70	0.55	5	15	3.5		10	10		368D	
SB007T03C	三洋	35	30		70	2		70	0.55	5	15	3		10	10	610F		
SB007T03Q	三洋	30			70	2		70	0.55	5	15	3		10	10		205F	
SB007W-03C	三洋	30			70	2		70	0.55	5	15	3		10	10	610D		
SB007W-03Q	三洋	30			70	2		70	0.55	5	15	3		10	10	205D		
SB007W03S	三洋	30			70	2		70	0.55	5	15	3.5		10	10		368A	
SB0015-03A	三洋		30		15			3	1	100	6		3	1		669		
SB0030-01A	三洋		10		30			4.5	1	70	6		1.5	1		669		

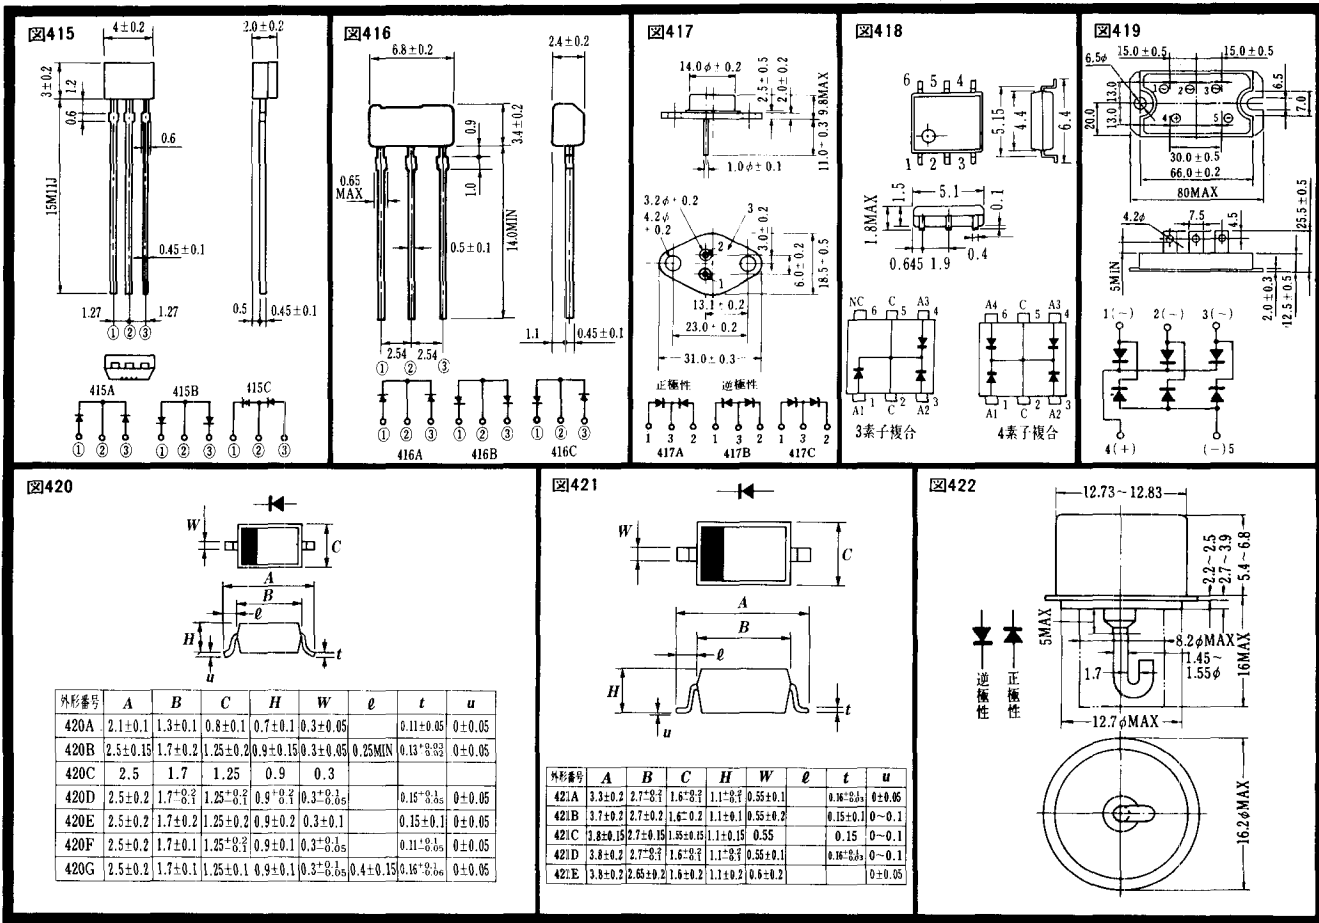

(寸法図単位: mm)